


REV	DOCUMENT	CHANGED BY	CHECK
10	0081896	NMN 21SEP11	CMH

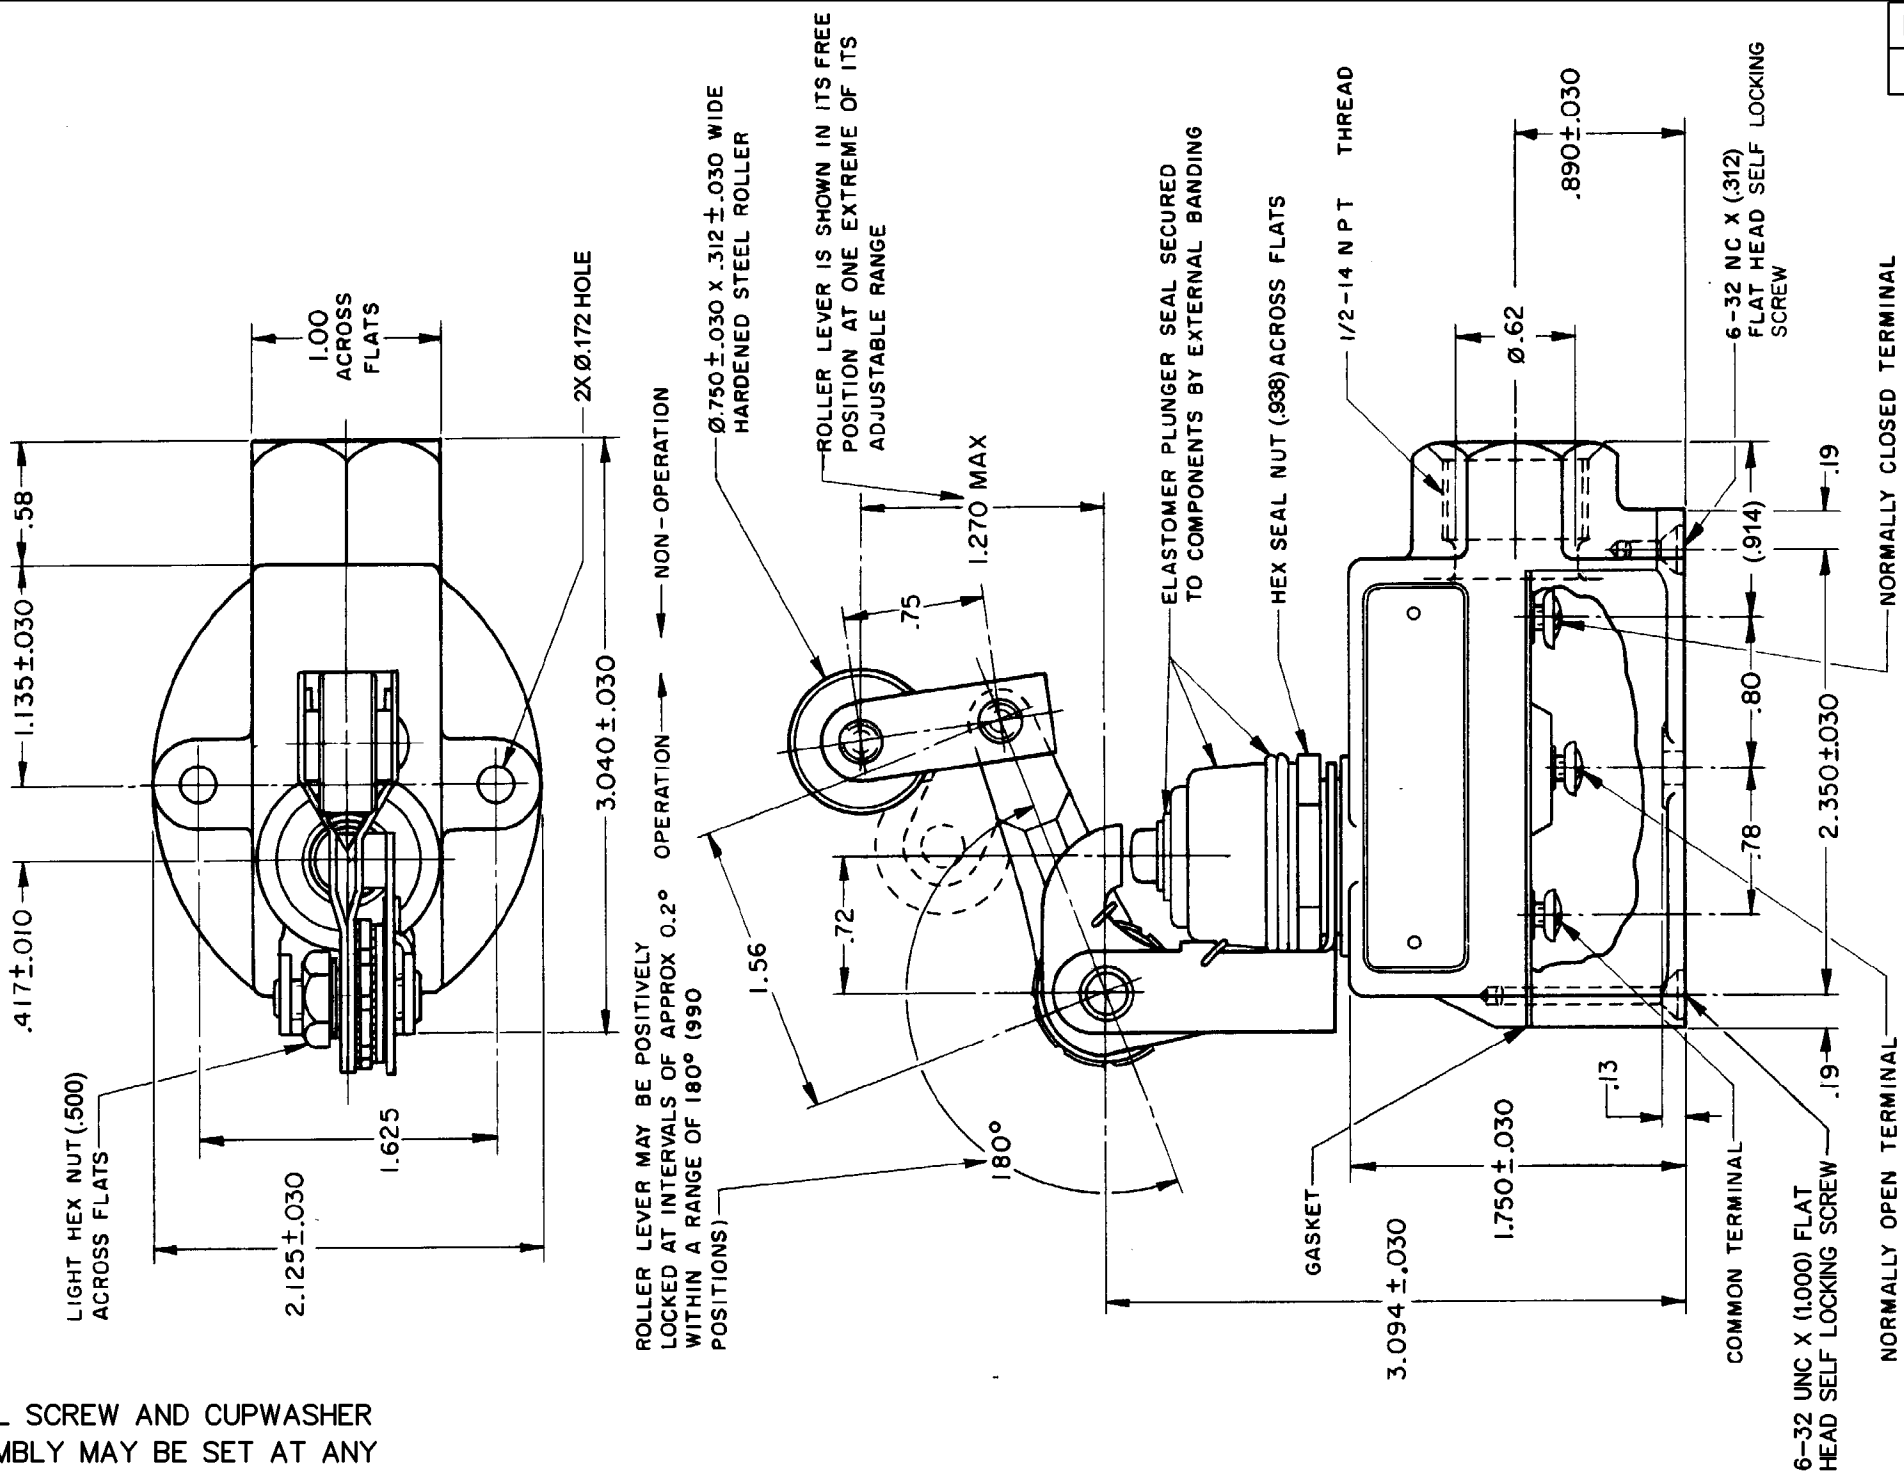

- 1 - 3X 6-32 NC X (.219) TERMINAL SCREW AND CUPWASHER
- 2 - ROLLER LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 3 - SEALED FOR NEMA 1, 3, 4 AND IP 66 RATING

RELEASE NO: SR9133

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH		DRAWN		RER		3AUG60		Honeywell									
OPERATING FORCE----- 8-20 OZ		CONTACT ARRANGEMENT S P D T		TOLERANCES UNLESS NOTED:		CHECK		GCH		3AUG60											
RELEASE FORCE----- 6 OZ MIN		15A-125, <u>250</u> OR 480 VAC, 2A-600 VAC -L74- 1/8 HP - 125 VAC; 1/4 HP - <u>250</u> VAC 1/2A - 125 VDC; 1/4A-250 VDC CE 1.5A, 240VAC 		NO PLACES X ±		.030 .015 .005 0"		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - ENCLOSED									
PRETRAVEL ----- .234 MAX				ONE PLACE .X ±																	
DIFFERENTIAL TRAVEL----- .006 MAX				TWO PLACE .XX ±				INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY													
OVERTRAVEL----- .219 MIN				THREE PLACE .XXX ±																	
SWITCH-BASIC REPLACEMENT----- BZ-2RN702				ANGLES X ±		THIRD ANGLE PROJECTION 		RASTER				SIZE		TYPE		CAGE CODE		DRAWING NAME		REV	
												B		I		-		BZV6-2RN28		10	
												SCALE		NONE				SHEET		1 OF 1	