
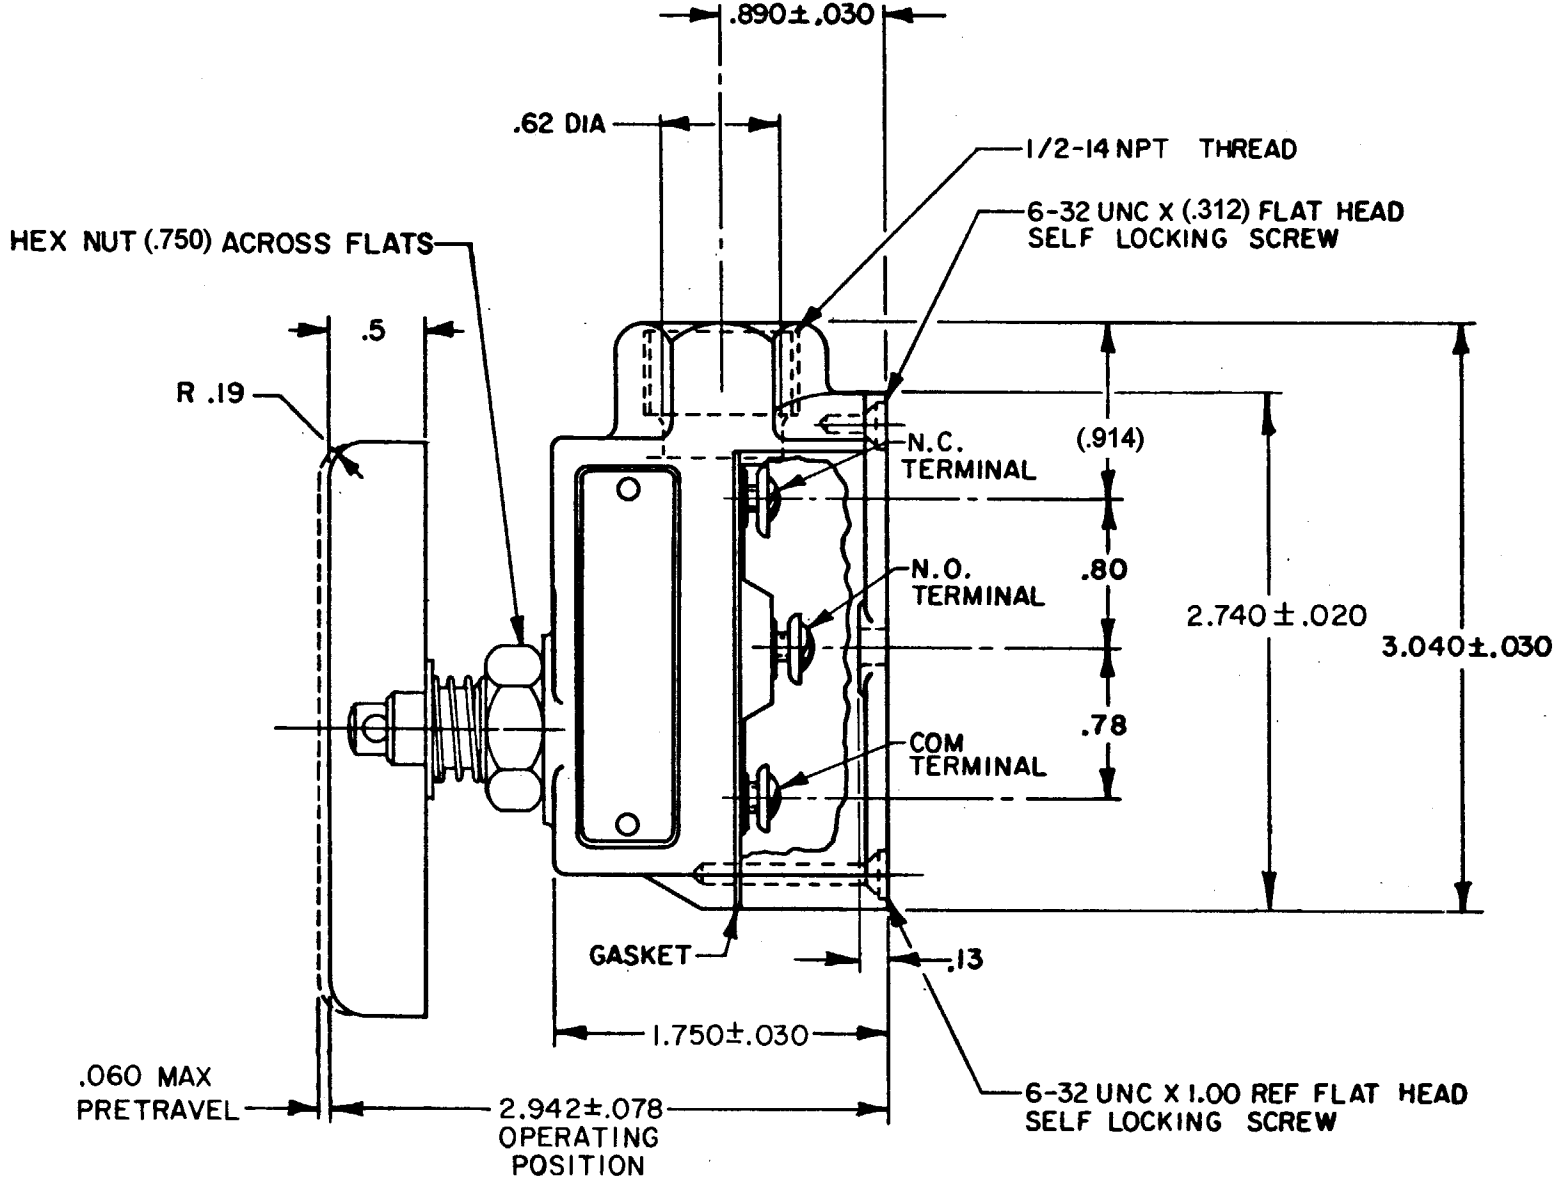


HONEYWELL
PART NUMBER
BZV6-2RQ39

REV	DOCUMENT	CHANGED BY	CHECK
6	0081848	NMN 19SEP11	CMH

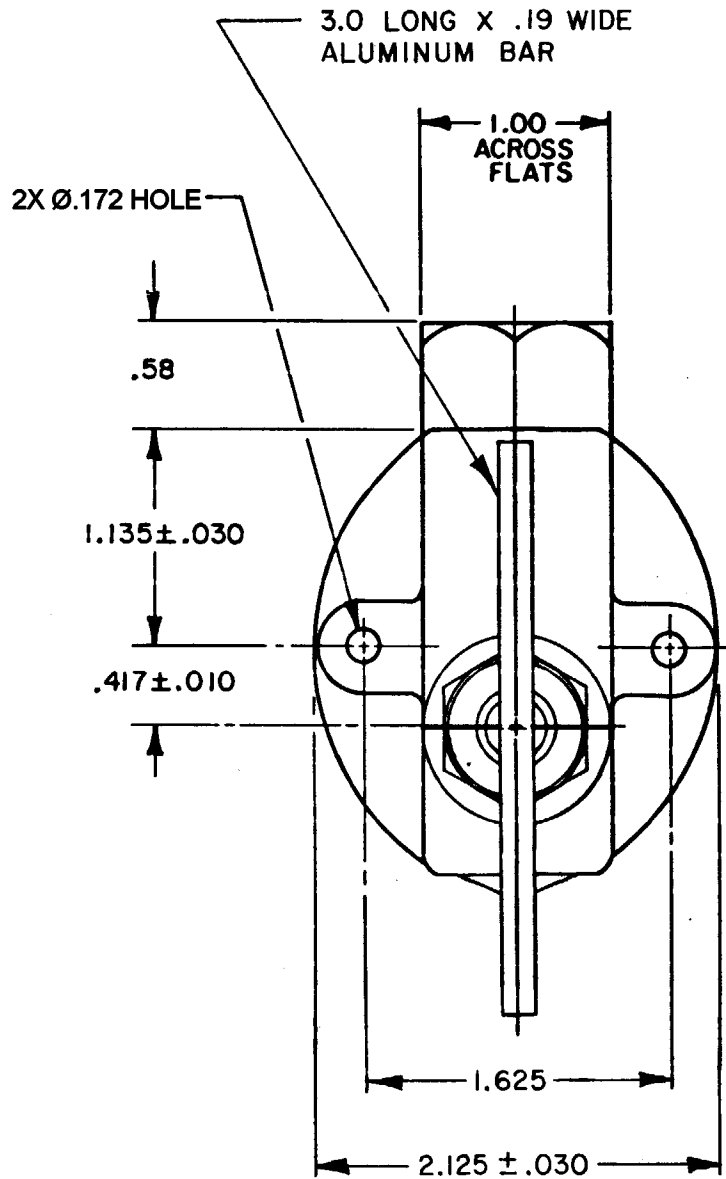

NOTES

- 1 - 3X 6 - 32 UNC X (.219) TERMINAL SCREW AND CUP WASHER.
- 2 - SEALED FOR NEMA 1 AND IP 40 RATING.

RELEASE NO: PR-8488

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN		WJM		29FEB80		Honeywell									
OPERATING FORCE----- 20 - 28 OZ		CONTACT ARRANGEMENT S P D T				CHECK		ROB		11MAR80											
RELEASE FORCE----- 12 OZ MIN		15A-125, <u>250</u> OR 480 VAC, 2A-600 VAC -L74- 1/8 HP - 125 VAC; 1/4 HP - <u>250</u> VAC 1/2A - 125 VDC; 1/4A-250 VDC CE 1.5A, 240VAC 		NO PLACES X ± .030		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.															
DIFFERENTIAL TRAVEL----- .002 MAX				ONE PLACE .X ± .015																	
OVERTRAVEL----- .070 MIN				TWO PLACE .XX ± .005		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY															
				THREE PLACE .XXX ± 0°																	
				THIRD ANGLE PROJECTION 																	
						RASTER						SIZE		TYPE		CAGE CODE		DRAWING NAME		REV	
												B		I		-		BZV6-2RQ39		6	
												SCALE		NONE		WEIGHT		.63 LB		SHEET 1 OF 1	