


HONEYWELL PART NUMBER
BZV6-2RQ9

REV	DOCUMENT	CHANGED BY	CHECK
8	0081848	NMN 19SEP11	CMH

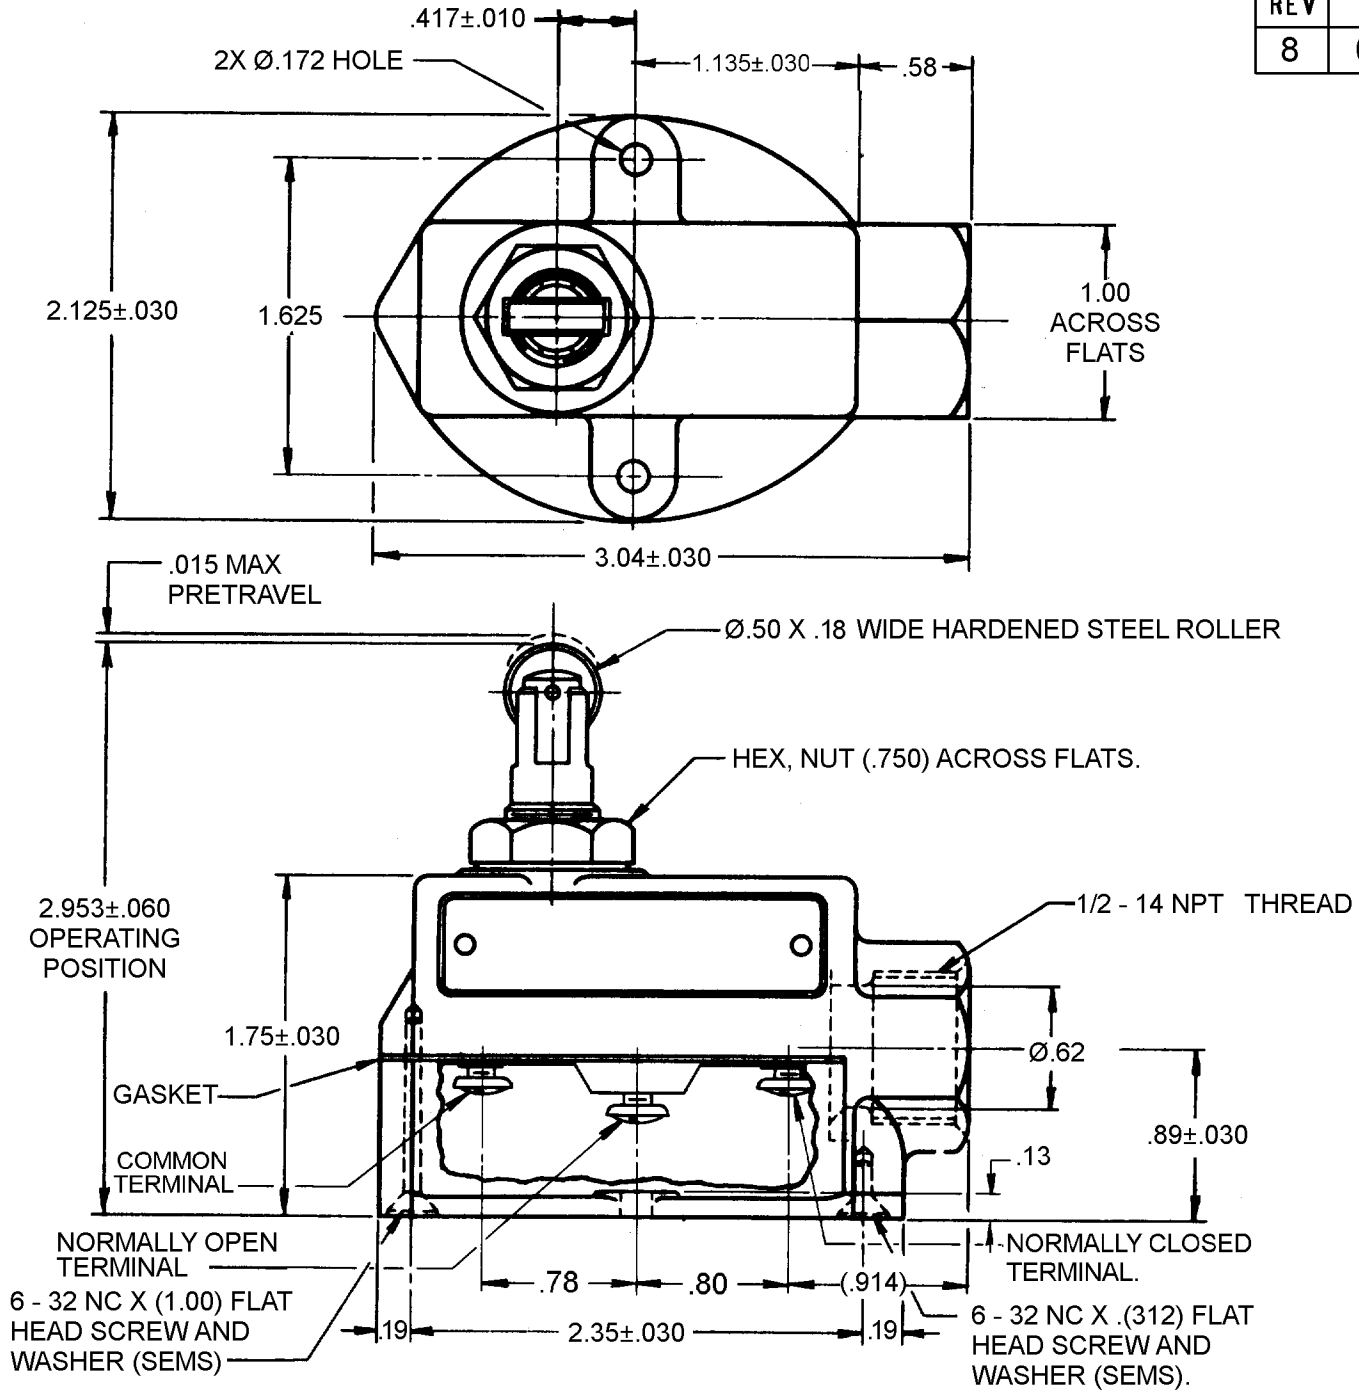

NOTES

- 1 - 3X 6 - 32 NC X (.219) TERMINAL SCREW AND CUP WASHER .
2 - SEALED FOR NEMA 1 AND IP 40 RATING.

RELEASE NO: SR-7230

CHARACTERISTICS	
OPERATING FORCE-----	9-13 OZ
RELEASE FORCE-----	4 OZ MIN
DIFFERENTIAL TRAVEL-----	.002 MAX
OVERTRAVEL-----	.140 MIN
SWITC-BASIC REPLACEMENT-----	BZ-2RQ69

ELECTRICAL DATA	
CONTACT ARRANGEMENT	
S P D T	
-L74-	15A-125, <u>250</u> OR 480 VAC, 2A-600 VAC
	1/8 HP - 125 VAC; 1/4 HP - <u>250</u> VAC
	1/2A - 125 VDC; 1/4A-250 VDC
CE 1.5A, 240VAC	

DESIGN UNITS: INCH		
TOLERANCES UNLESS NOTED:		
NO PLACES	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
ANGLES	X	±
THIRD ANGLE PROJECTION		

DRAWN	O.M.W	15JAN58
CHECK	GCH	28JAN58
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell					
TITLE SWITCH - ENCLOSED					
SIZE	TYPE	CAGE CODE	DRAWING NAME	REV	
B	I	-	BZV6-2RQ9	8	
SCALE	NONE	WEIGHT	.58 LB	SHEET	I OF I