



HONEYWELL
PART NUMBER
BZV6-7RN

REV	DOCUMENT	CHANGED BY	CHECK
7	0081896	NMN 21SEP11	CMH

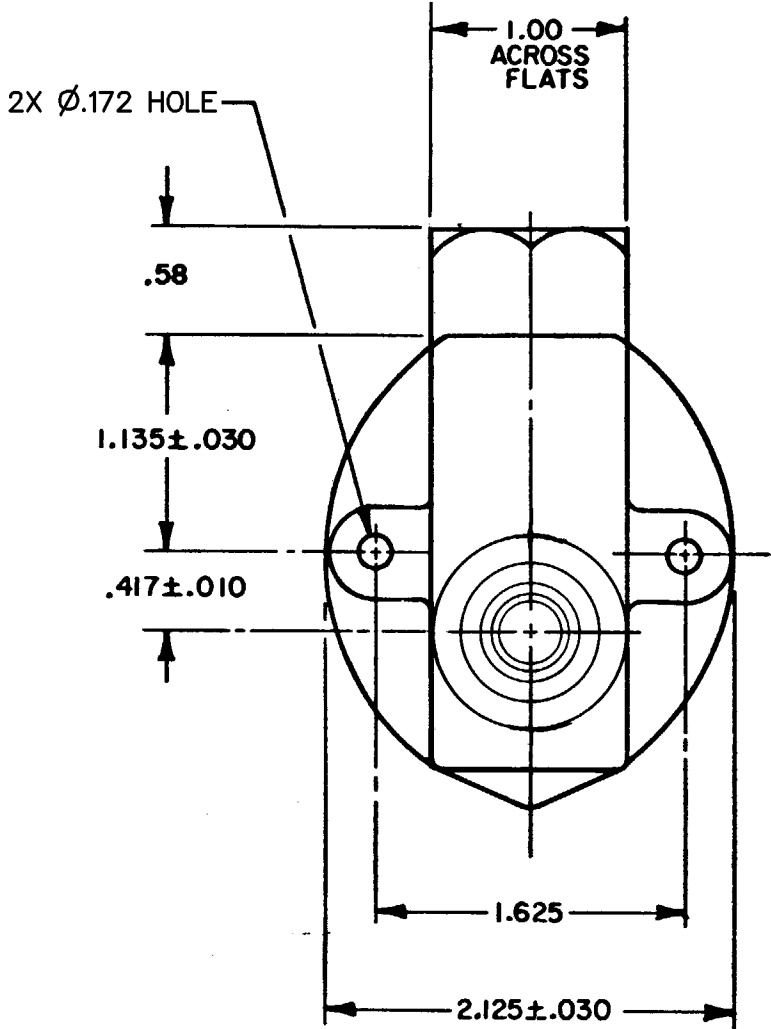

ELASTOMER PLUNGER SEAL SECURED TO COMPONENTS BY EXTERNAL BANDING

HARDENED STEEL PLUNGER

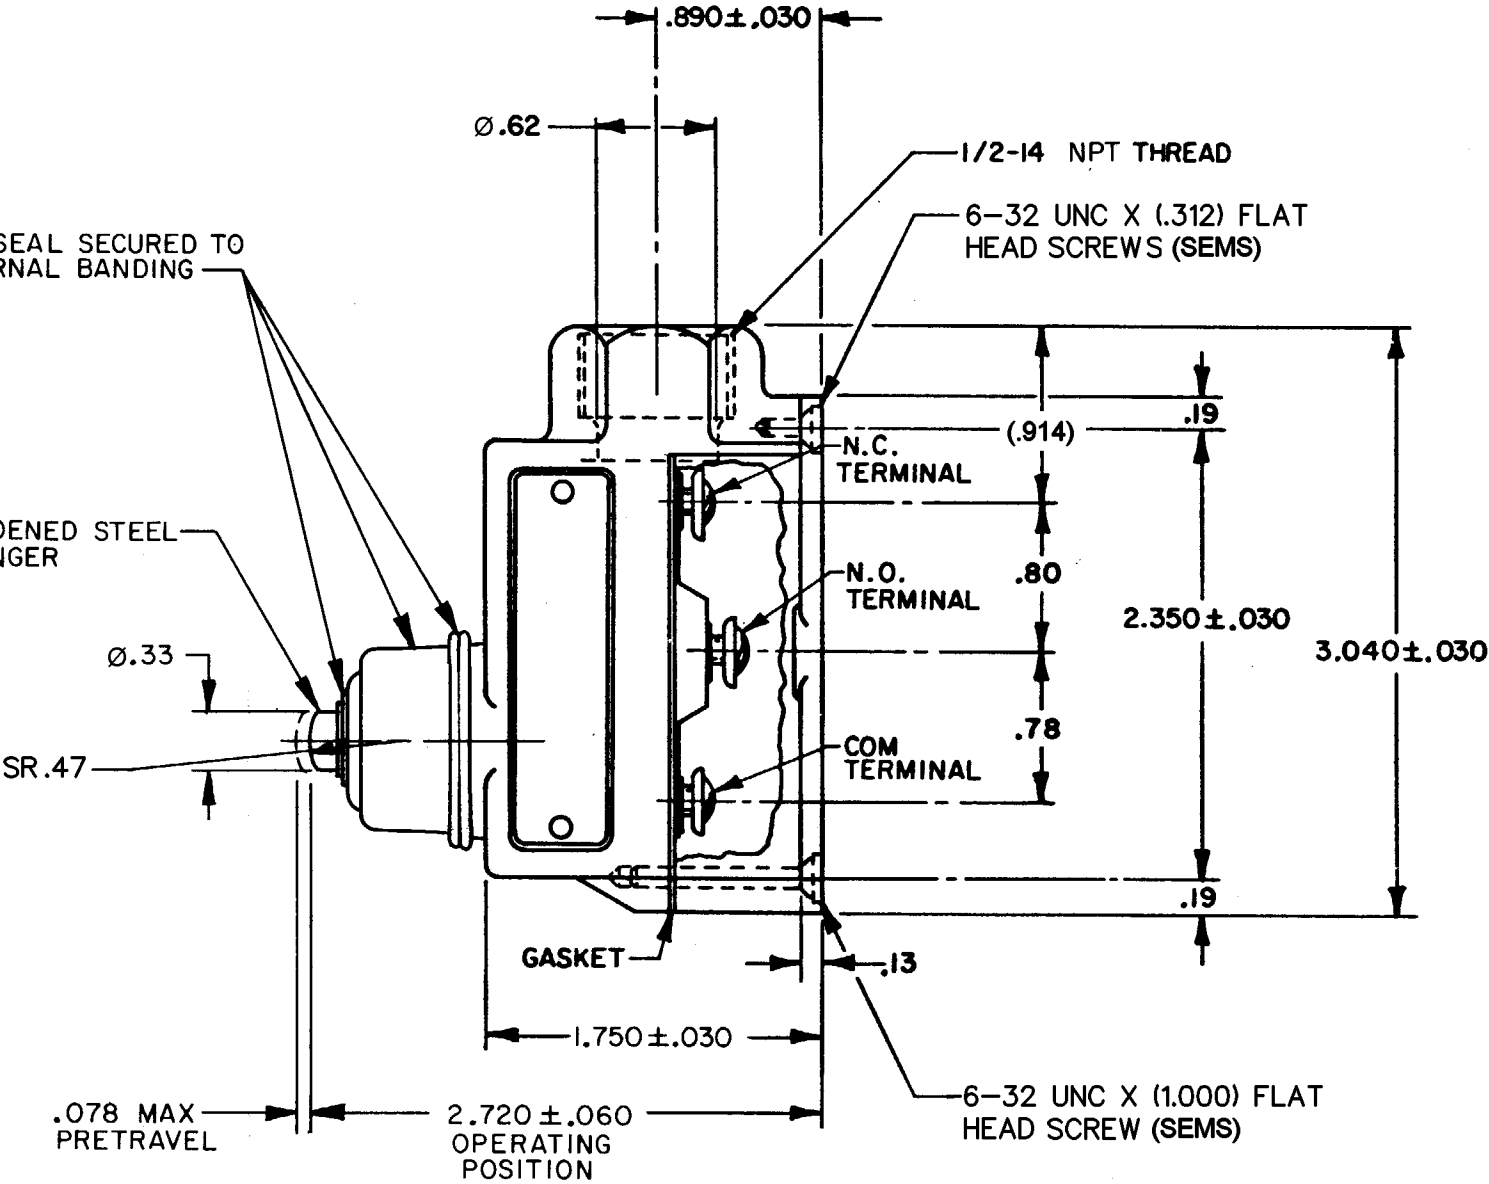

- NOTES
- 1 - 3X 6 - 32 UNC X (.219) TERMINAL SCREW AND CUP WASHER
 - 2 - SEALED FOR NEMA 1, 3, 4 AND IP 66 RATING

RELEASE NO: PR-10399

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN		JAP		20JUL81		Honeywell									
OPERATING FORCE----- 22-39 OZ		CONTACT ARRANGEMENT S P D T				CHECK		CEB		21JUL81											
RELEASE FORCE----- 4 OZ MIN		15A-125, <u>250</u> OR 480 VAC,2A-600 VAC -L74- 1/8 HP - 125 VAC;1/4 HP - <u>250</u> VAC 1/2A - 125 VDC; 1/4A-250 VDC CE 1.5A, 240VAC 		NO PLACES		X		±		.030 .015 .005 0'		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.									
DIFFERENTIAL TRAVEL----- .005MAX				ONE PLACE		.X		±													
OVERTRAVEL----- .219 MIN				TWO PLACE		.XX		±													
SWITC-BASIC REPLACEMENT----- BZ-7RQ67				THREE PLACE		.XXX		±													
				ANGLES		X		±		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY											
				THIRD ANGLE PROJECTION 																	
				RASTER						TITLE SWITCH - ENCLOSED											
										SIZE		TYPE		CAGE CODE		DRAWING NAME				REV	
										B		I		-		BZV6-7RN				7	
										SCALE		NONE		WEIGHT		.62LB		SHEET		1 OF 1	