

Technical drawing of a mechanical part with dimensions:

- Overall width: 1.00 [25.4]
- Overall height: 1.00 [25.4]
- Internal feature height: 0.63 [16.0]




PANDUIT PART NUMBER*	MAXIMUM CABLE DIA. in. (mm)	WEIGHT lbs. (g)/100pcs
LWC38-A	0.37 (9.5)	0.64 (292)

*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION, FOR PACKAGE SIZE.

- 2) MOUNT IS DESIGNED TO SUPPORT
0.50 lbs [227g] MAX WEIGHT ON
A CLEAN DRY SMOOTH SURFACE.

TO APPLY LATCHING WIRE CLIP:

1. REMOVE PROTECTIVE LINER
2. PLACE IN DESIRED LOCATION
3. APPLY PRESSURE TO TOP OF LATCHING WIRE CLIP

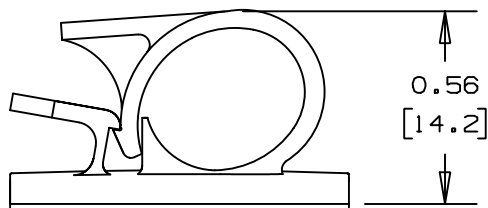

ADHESIVE BACKING: PRESSURE SENSITIVE FOAM 0.04 [1.0] THICK WITH PROTECTIVE LINER TO EXTEND BEYOND EDGE FORMING A TEAR TAB.

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE, AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED, AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED, ARE BEYOND PANDUIT'S CONTROL.

CAD FILENAME/LAYERS

G00160BA_PB_LWC38A_01

PANDUIT

CORP. TINLEY PARK, ILLINOIS

LWC38-A, LATCHING WIRE CLIP

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± 0.05 (1.3) (.XXX) ± 0.010 (0.25)
(.XX) ± 0.02 (0.5) ANGLES $\pm 5^\circ$

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY JRL

MAT'L:

2X

DATE	11-11-93
------	----------

NYLON 6/6

DRAWING NO.

GB0160BA

DWG
A
SIZE

1	1-7-98	CGSM		CHANGED NOTE 3 ON APPLICATION INSTR.	GB0160BA	1			
R	11-11-93	JRL		INITIAL RELEASE	GB0160BA	R			
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	