

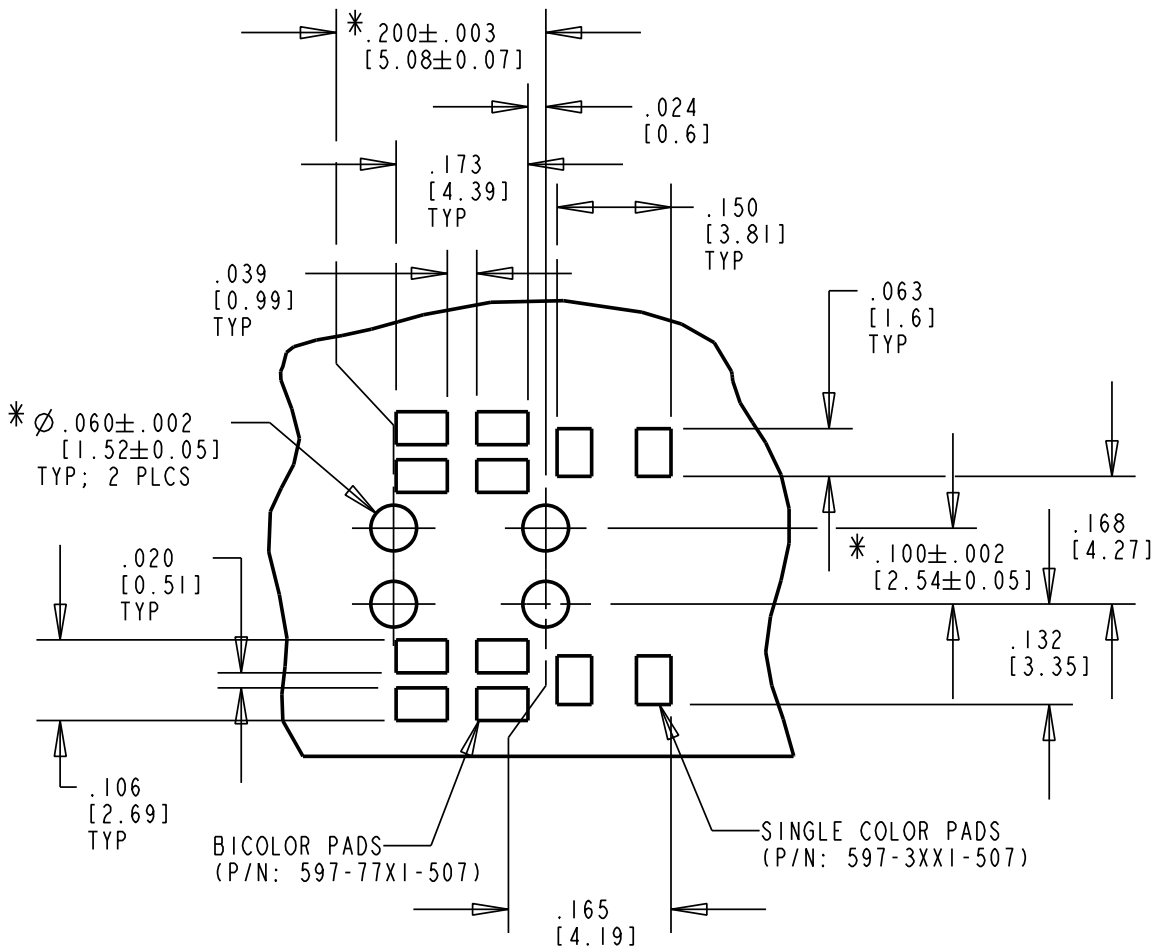
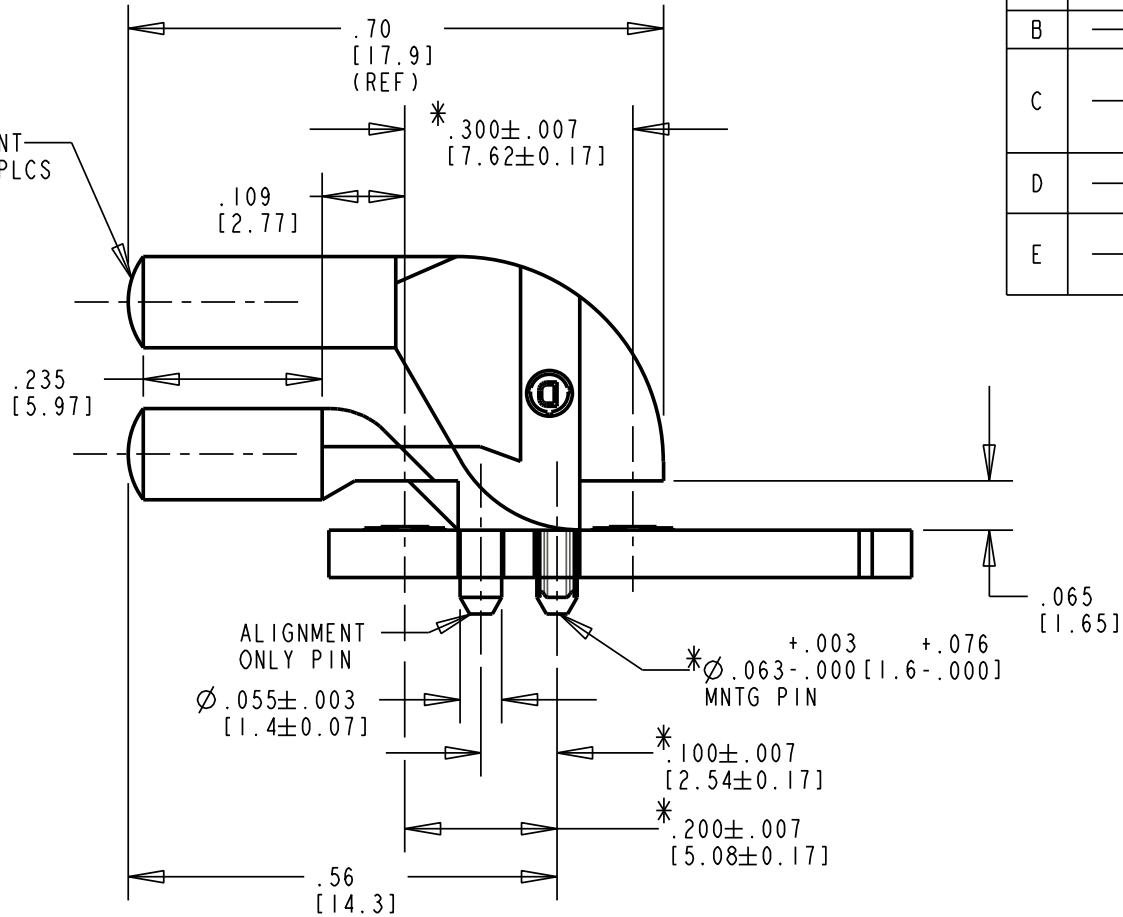


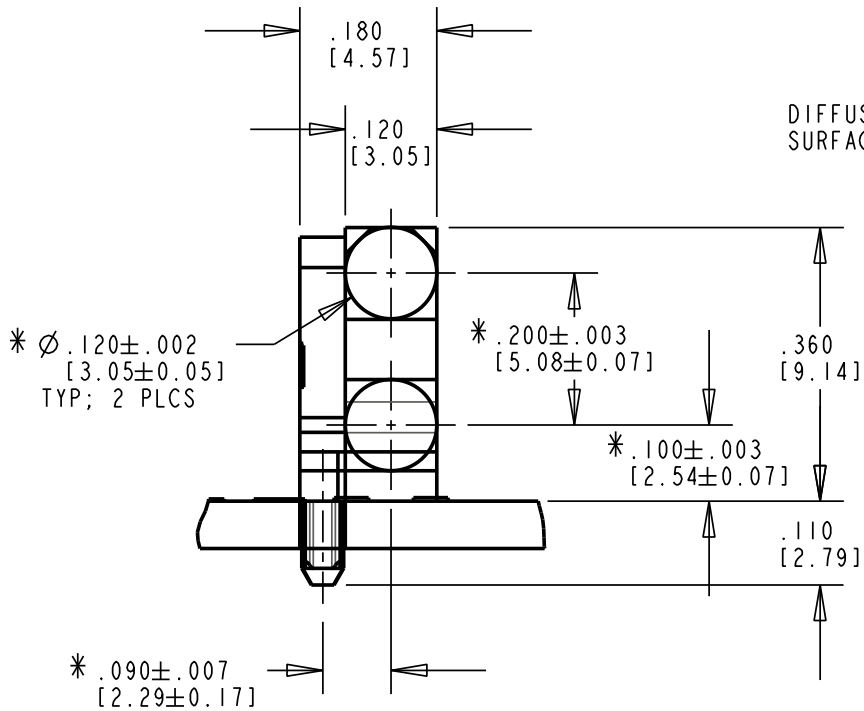

SOLDER PAD/HOLES LAYOUT

* DENOTES CRITICAL DIMENSION OR SPECIFICATION

- NOTES:
1. COMPONENT TO BE MOLDED IN A CLEAR TRANSMISSIVE POLYCARBONATE.
 2. COMPONENT DESIGNED TO BE PRESSED INTO P.C. BOARD.
 3. MINIMUM ALLOWABLE PITCH IS .200 FOR EITHER BI-COLOR OR SINGLE.
 4. LIGHTSOURCES: SMT LED (DIALIGHT PART NUMBERS: 597-3XX1-5XX OR 597-77X1-5XX).
 5. DIALIGHT LIGHTPIPE PART NUMBER: 515-1094.

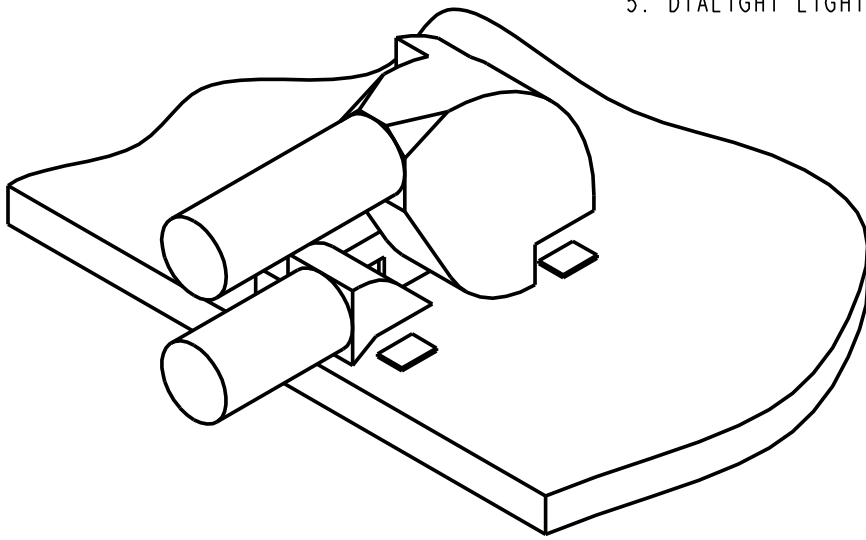

REV.	ECN NO.	REVISIONS	DRN.	CKD.	APP.	DATE
A		NEW RELEASE	M.C.	A.V.	N.O.	9-9-99
B		ADDED METRIC UNITS.	M.C.	D.C.	N.O.	10-19-99
C		ADDED: DIMS .100 ±.003; .200 ±.003; ASTERISKS IN MULTIPLE LOCATIONS AND * DENOTES CRITICAL DIMENSIONS OR SPECIFICATIONS.	ADM	D.C.	N.O.	7-19-01
D		FLIPPED DIMENSIONS; INCHES WERE IN BRACKETS	JMC	D.C.	N.O.	9-4-02
E		ADDED DIM'S FOR ALIGNMENT PIN AND .063 +.003/- .000 WAS .064 NOMINAL.	YIS			

THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT.		
SCALE 4:1	DRAWING NUMBER	REV
ALL DIM'S IN: INCHES (MM)	C-16433	E
TOLERANCES: UNLESS OTHERWISE SPECIFIED	TITLE	BI-LEVEL LIGHTPIPE (EXTENDED)
FRACTIONS: ±1/64	MATERIAL	
DECIMALS (.XX): ±.02		
DECIMALS (.XXX): ±.015		
DECIMALS (.XXXX): ±.0005		
ANGLES: ±3°		
FINISH:		
FSCM 83330		
SHEET 1 OF 1	FAMILY TABLE:	