


NOTES:

1. MATERIALS AND FINISHES:
BODY - BRASS, SILVER PLATING
CONTACT - BERYLLIUM COPPER, SILVER PLATING
INSULATOR - PTFE
2. ELECTRICAL:
A. IMPEDANCE: 50 OHM
B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.
3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C
4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 31-3220, AND DATE CODE"
5. MAX. PANEL THICKNESS=6.98mm


THIRD ANGLE PROJ.

REVISIONS



REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	
W	REDRAWN IN PRO-E, ADD COD	26-Sep-11	47675	ASH

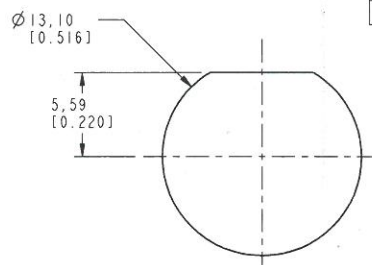

SCALE 3.000

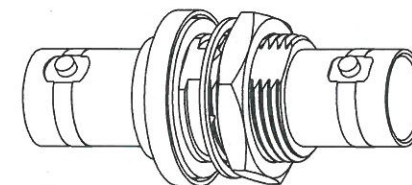RECOMMENDED
MOUNTING HOLE
DIMENSIONS

SCALE 2.000

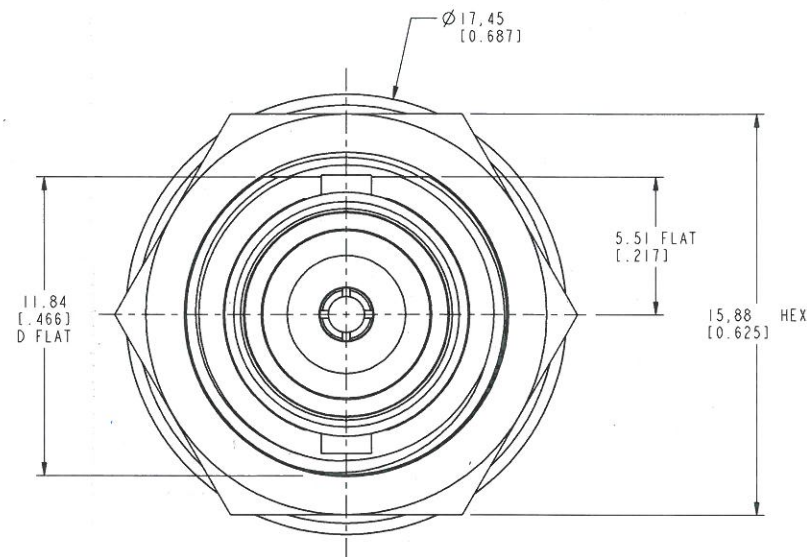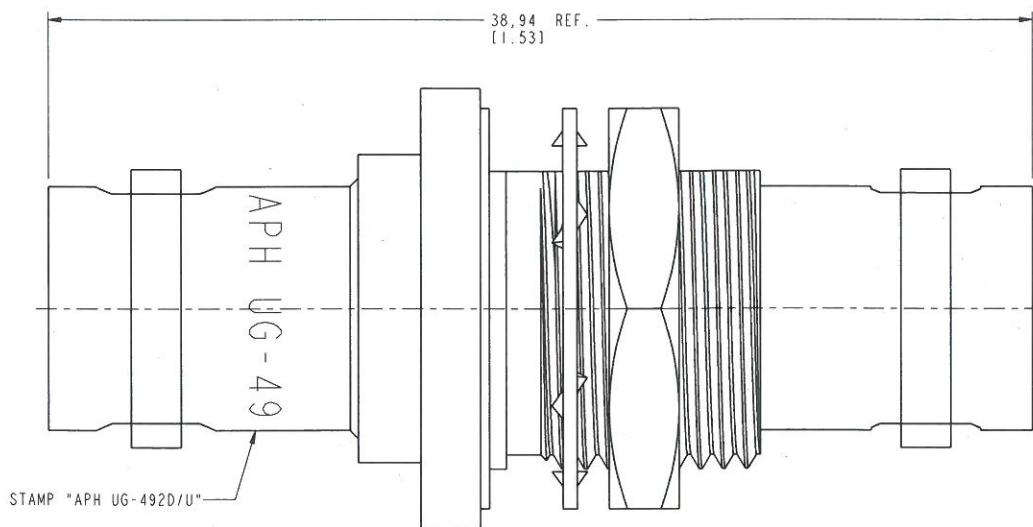

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN R. MAO	DATE 31-May-11	TITLE BNC ADAPTOR PRESSURIZED UG-492D/U	Amphenol RF www.amphenolrf.com
REFERENCE EAR # AND	ENGINEER D ROYCE	DATE 01-Jul-09		
CONFIGURATION LEVEL: □□□□	APPROVED S. HSIEH	DATE 31-May-11		
FINISH	CAD FILE	SCALE: 5.0:1.0	SHEET 2 OF 2	DRAWING NO. 31-3220
		DWG SIZE B	REV W	ITEM NO. 31-3220
				PART NO. 31-3220