


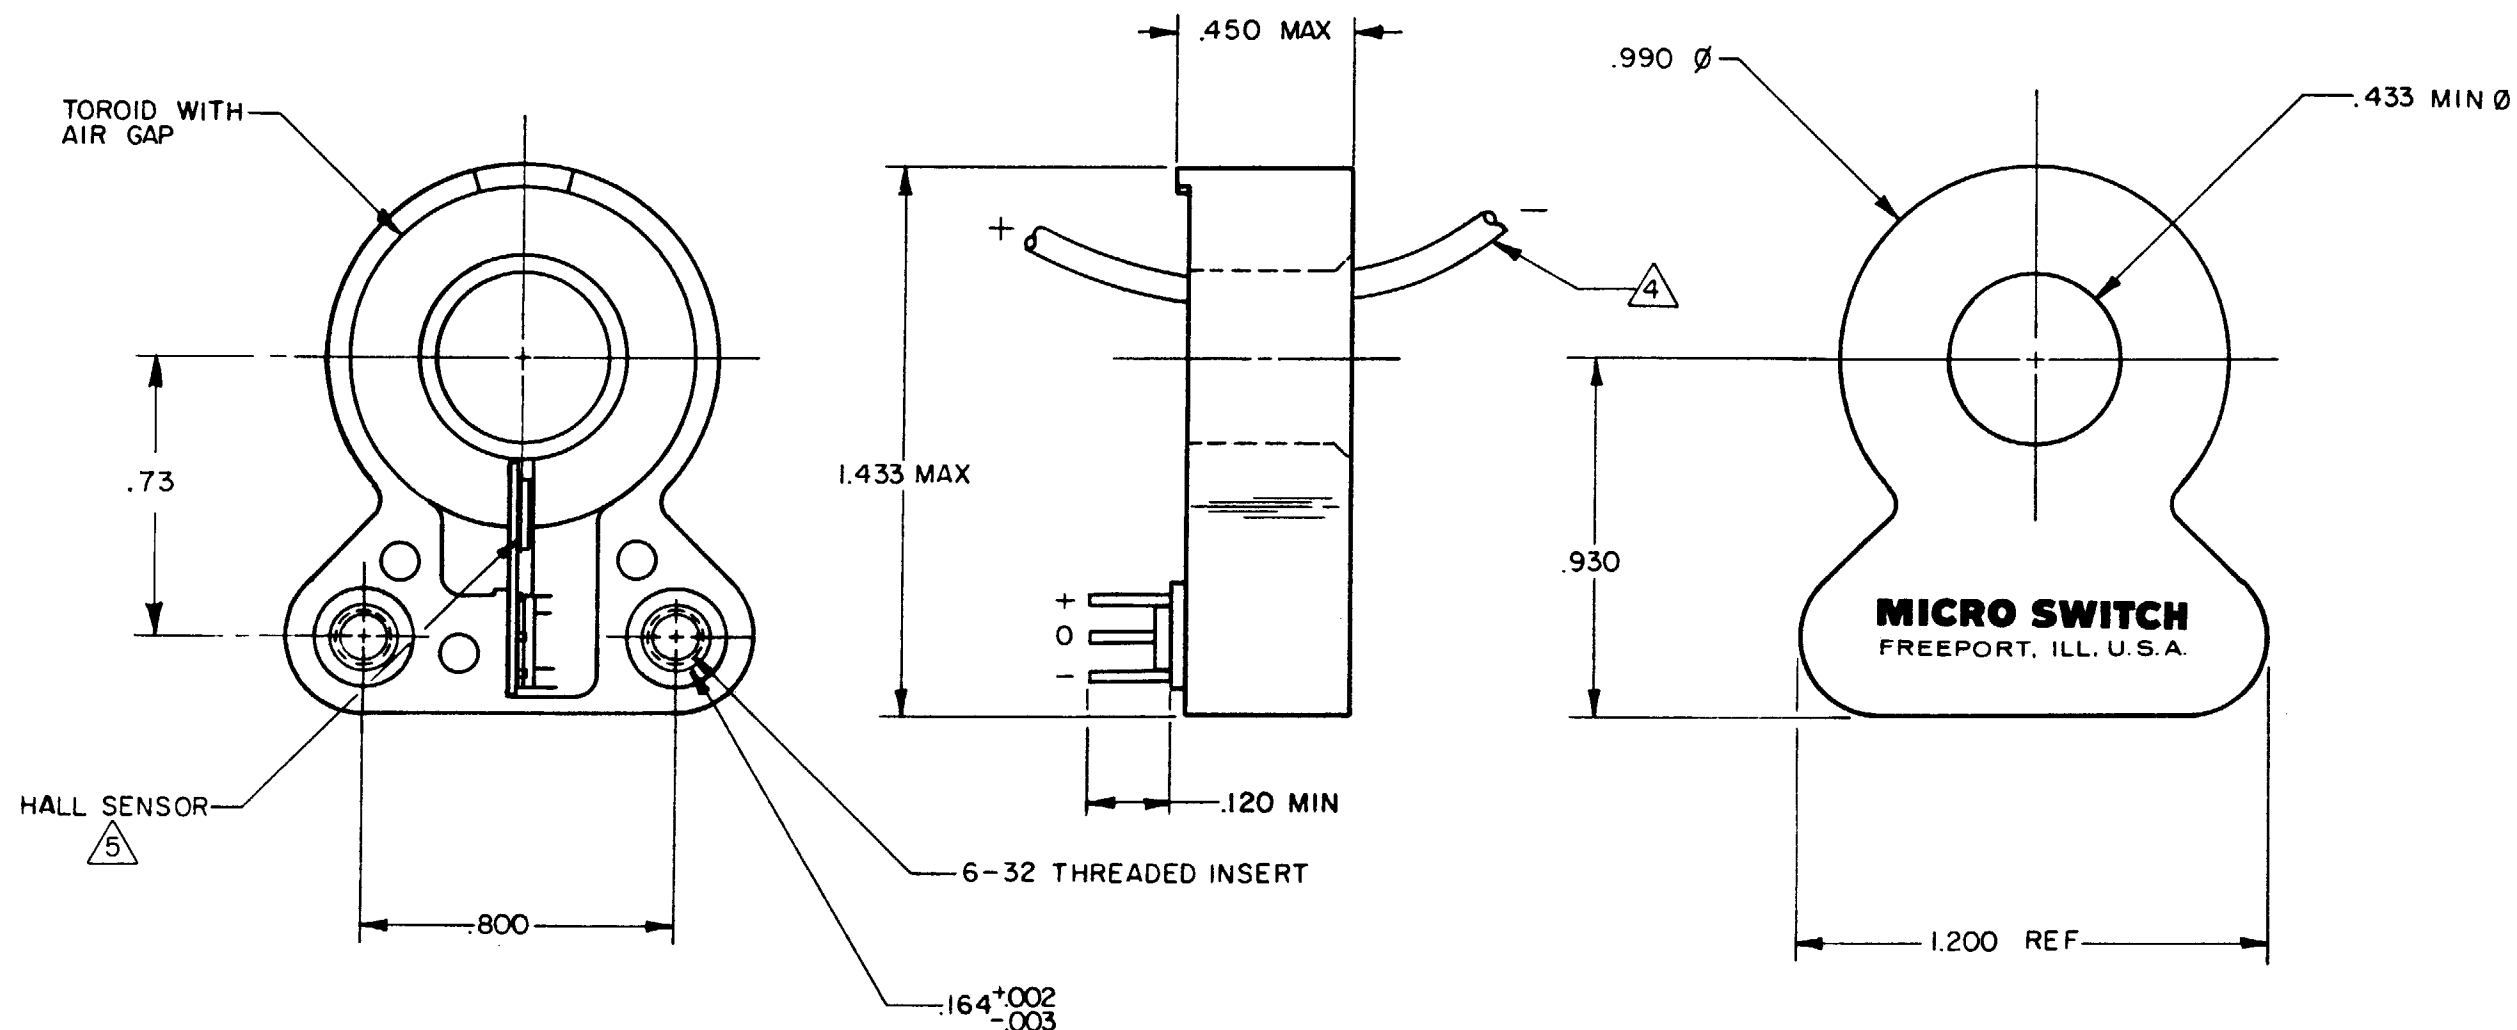


NOTES

- NOTES
- 1 - AIR GAP IN TOROID IS .075
 - 2 - GAUSS LEVEL IN AIR GAP IS 6.0 TO 7.0 GAUSS PER NI
 - 3 - RECOMMENDED MOUNTING IS .250 LONG 6-32 SCREW
 - ④ CONVENTIONAL CURRENT FLOW IN DIRECTION INDICATED WILL CAUSE AN INCREASE IN OUTPUT VOLTAGE
 - ⑤ SEE 91SS12-2 FOR ELECTRICAL CHARACTERISTICS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



SCALE **2 : 1**

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE

ONE PLACE	(.0)	$\pm .030$
-----------	------	------------

TWO PLACE (.00) $\pm .015$

THREE PLACE	(.000)	$\pm .005$
-------------	--------	------------

THREE PLATE	(1.000) ±1.000
ANGLES	±

ANGLES	1

WEIGHT

