


─ .040 [1.02]

.052 [1.32]

.020 [0.51]

CONTACTS (8)

.260 [6.60]



.460 [11.68] - (.885 [22.48]) — **→** (.330 [8.38]) **→** .040 [1.02] --WIRE GUIDE SURFACES .312 [7.92] .287 [7.29] .174 [4.42] .109 [2.77] .045 [1.14] .234 .124 [3.15] —— (.622 [I5.80]) —— .240 [6.10]

NOTES:

I- PART CONSISTS OF:

PRE-INSERTED PLUG BODY


2- MATERIALS:

FRONT HOUSING PLASTIC : CLEAR POLYCARBONATE, UL 94-VO CONTACTS: PHOSPHOR BRONZE, SELECTIVE GOLD PLATING

- 3- CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN .042 [1.07] TO .048 [1.22] OUTSIDE DIAMETER OF INSULATION
- 4- DESIGNED FOR CATEGORY 5/5e APPLICATIONS.
- 5- DIMENSIONS AND TOLERANCES COMPLY WITH FCC/CFR 47, PART 68.

6 TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13]

7. FOR PRODUCT SPECIFICATION SEE PRO26-01.

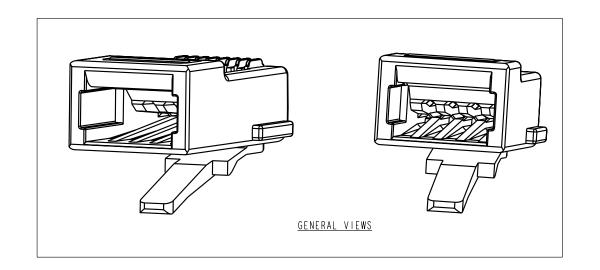



BULK	50 MICRO-INCHES [1.27um]	SS-37000-0I0
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER

THIRD ANGLE PROJECTION	Bel Stewart C	Connector
		http://www.stewartconnector.co
DO NOT SCALE DRAWING	TITLE: UNSHIELDED CAT 5e PLUG	
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE	WITH KI KEY OPTION	
DIMENSIONS: INCHES [METRIC]	THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON	DRN BY: TRM DATE 10-31-0
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ±1°	ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN	APPD BY: DATE
SHEET NO. OF	CONSENT OF BEL STEWART CONNECTOR. THE SUBJECT MATTER MAY BE PATENTED OR A PATENT MAY BE PENDING.	DWG. NO. CT370060 REV. A