

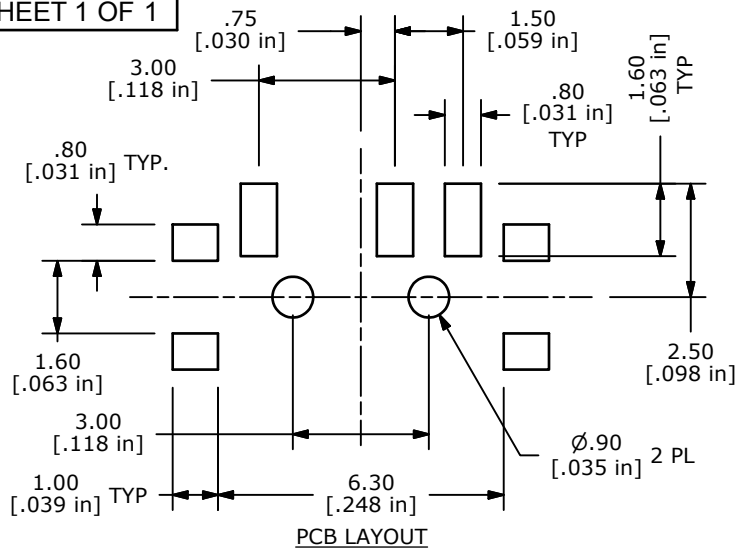
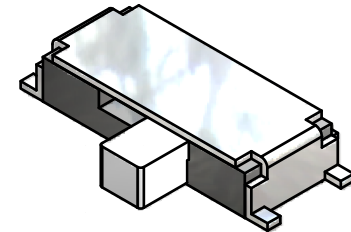
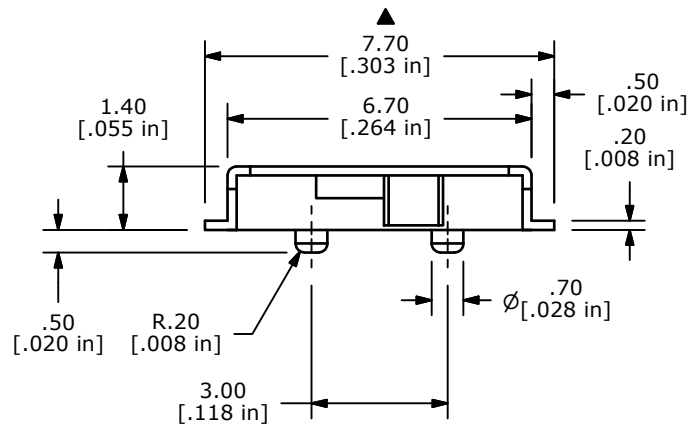


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.3A, 4VDC
- ▲ 5. PLATING: 40 MICRO INCHES NICKEL
W/40 MICRO INCHES OF SILVER
5. OPERATING FORCE: 150±100GF
6. OPERATING LIFE: 10,000 CYCLES
7. TRAVEL: 1.50MM
8. ▲ DENOTES CRITICAL PARAMETER.

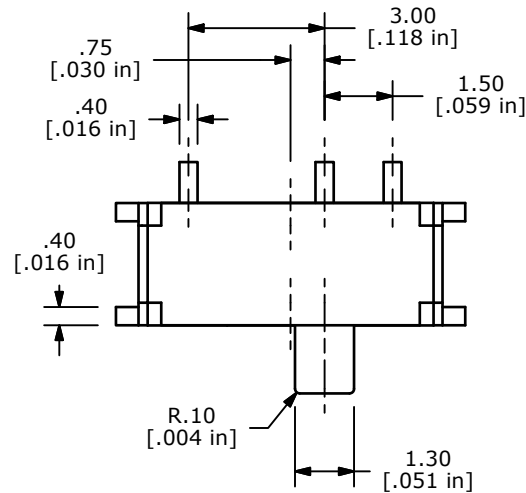

ISOMETRIC

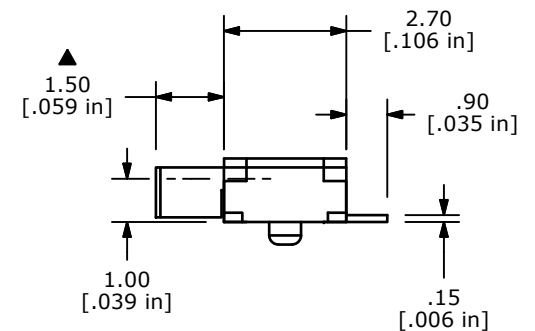

C	19990	REVISED PCB LAYOUT	6/9/11	BGL
B	14330	ADD PLATING NOTE, UPDATE TITLE	9/17/04	AR
A	13514	RELEASED FOR PRODUCTION	10/8/03	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE EG1260ASQ

SCALE 4:1

DATE 10/7/2003

DR AR

DWG D041200

REV C