
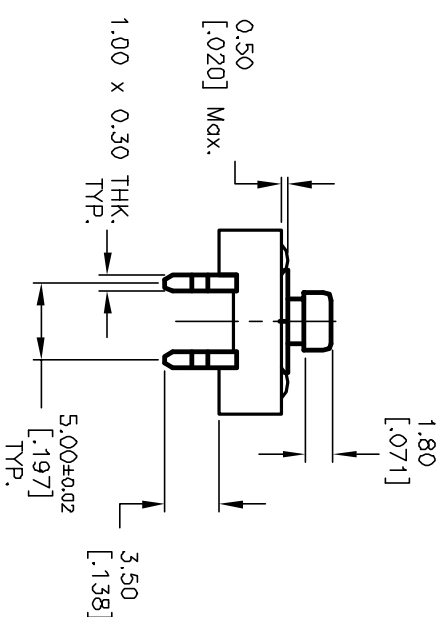


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25

3. TERM. NOS. FOR REF. ONLY
4. RATING: 50ma, @12V DC
5. TRAVEL: 0.30 $\pm$ 0.15mm
6. OPERATING FORCE: 160 $\pm$ 50gf
7. CONTACT RESISTANCE: 100 MILLIOHMS Max.
8. ELECTRICAL LIFE: 100,000 CYCLES MIN.
9. INDICATE MAJOR FEATURE:

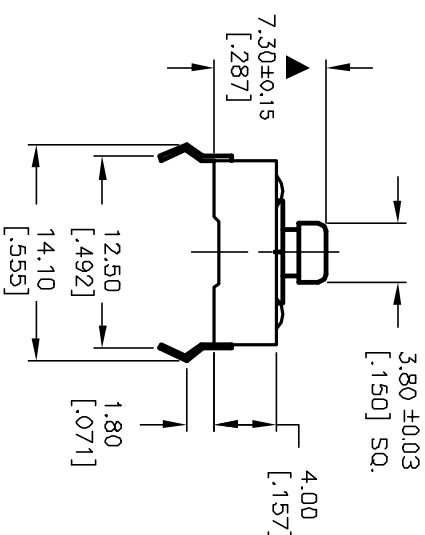

8. ELECTRICAL LIFE: 100,000 CYCLES MIN. ▲ 9. INDICATE MAJOR FEATURE:					E-SWITCH®				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					TITLE				
A	11620	RELEASED FOR PRODUCTION	8/20/01	CJB	TL 1100 A F160 Q (3.80 SQ. Actuator)				
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
					SCALE	DATE	DR	DWG	REV
					2:1	8/20/01	CJB	D301096	A