






PCB LAYOUT



CIRCUIT DIAGRAM: SPST

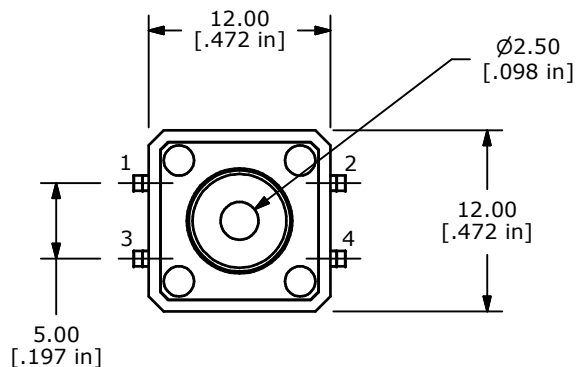

ISOMETRIC

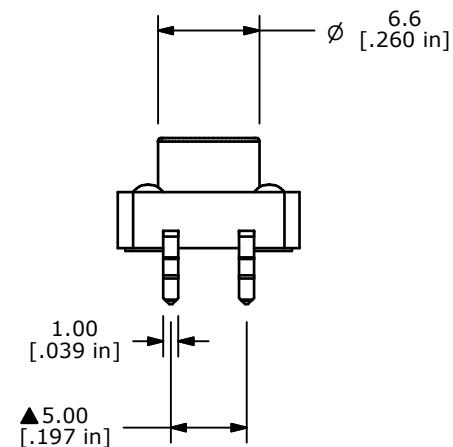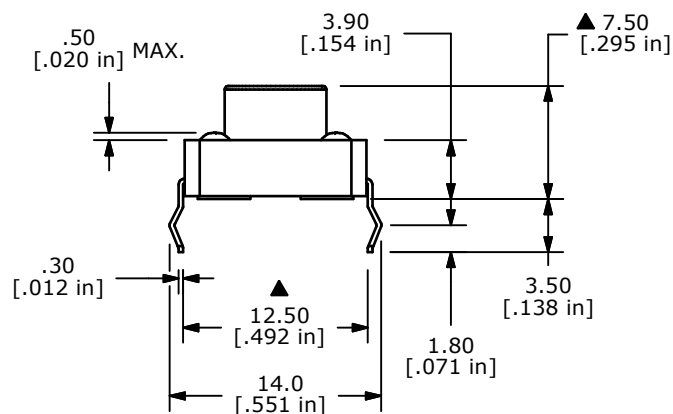

NOTES:

1. ALL DIMENSIONS IN mm [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @ 12VDC
- ▲ 5. OPERATING FORCE: 160 ± 50 gms
6. TRAVEL: 0.3mm ±0.15
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 300,000 CYCLES MIN.
- ▲ 9. CONTACT DOME: STAINLESS STEEL
10. 2002/95/EC (ROHS) COMPLIANT
11. ▲ DENOTES CRITICAL PARAMETER



B	20597	UPDATE CD PER STANDARD	05/08/12	drg
A	17872	RELEASED FOR PRODUCTION	11/28/07	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL1100EF160QSSDOME

SCALE 2:1

DATE 11/28/2007

DR BLR

DWG D301098

REV B