

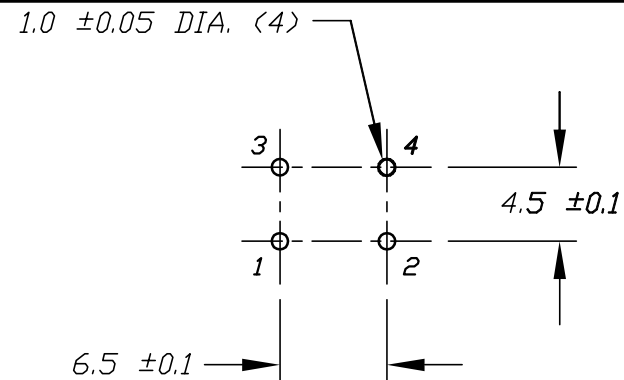
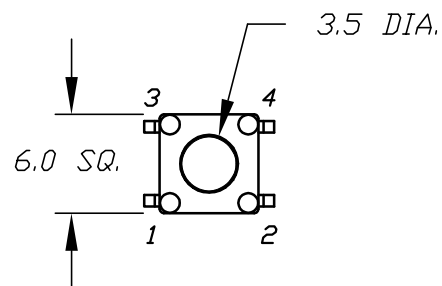



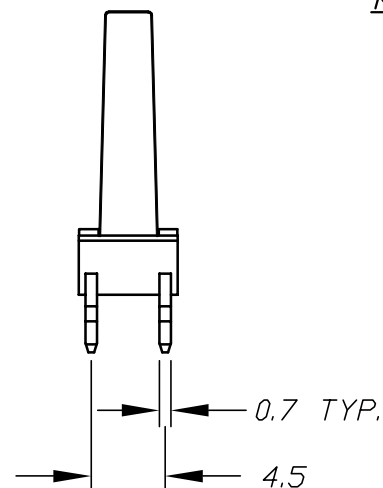

RECOMMEND P.C.B. HOLES

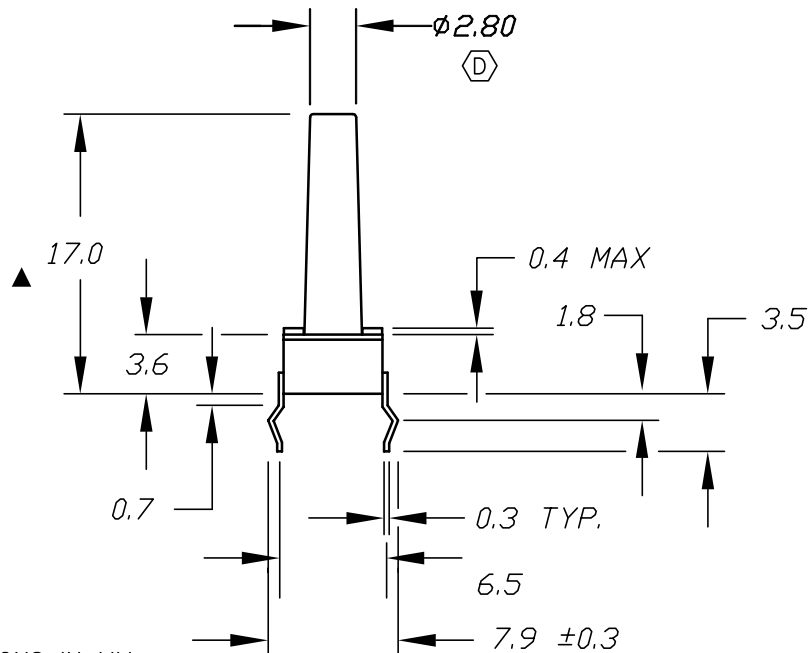

CIRCUIT: SPST

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: DC 12V, 50mA X.X=±0.25
5. TRAVEL: 0.25±0.1mm
6. CONTACT RESISTANCE: 100m Ohms Max,
7. INSULATION RESISTANCE: 100M Ohms Min.
8. DIELECTRIC STRENGTH: 250V RMS Min.
9. LIFE: 100,000 CYCLES Min.

D	14234	DIM $\phi 2.80$ WAS $\phi 3.40$	8/17/04	AR
C	13211	CORRECT TITLE	6/13/03	AR
B	11425	DIM. CHANGE $\phi 2.8$ TO $\phi 3.4$	4/20/01	RJC
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE

TL1105LF160Q

SCALE

2:1

DATE

4/17/01

DR

CJB

DWG

D310009

REV

D