

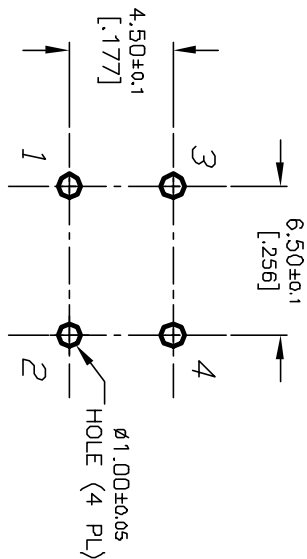





RECOMMENDED P.C.B. LAYOUT
SCALE 3:1

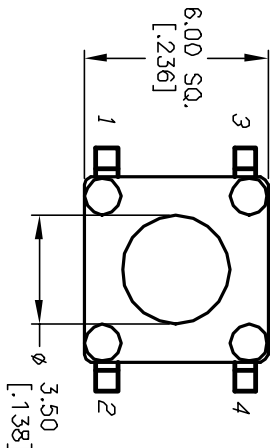

CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. OPERATING FORCE: 100 ± 50 gf
6. TRAVEL: 0.25 ± 0.1 mm
7. CONTACT RESISTANCE: 100 mlll Ω Max.
8. DIELECTRIC STRENGTH: 250V RMS min.
9. INSULATION RESISTANCE: 100 Mega Ω min.
10. ELECTRICAL LIFE: 100,000 CYCLES min.
11. DESIGNATE MAJOR FEATURE:

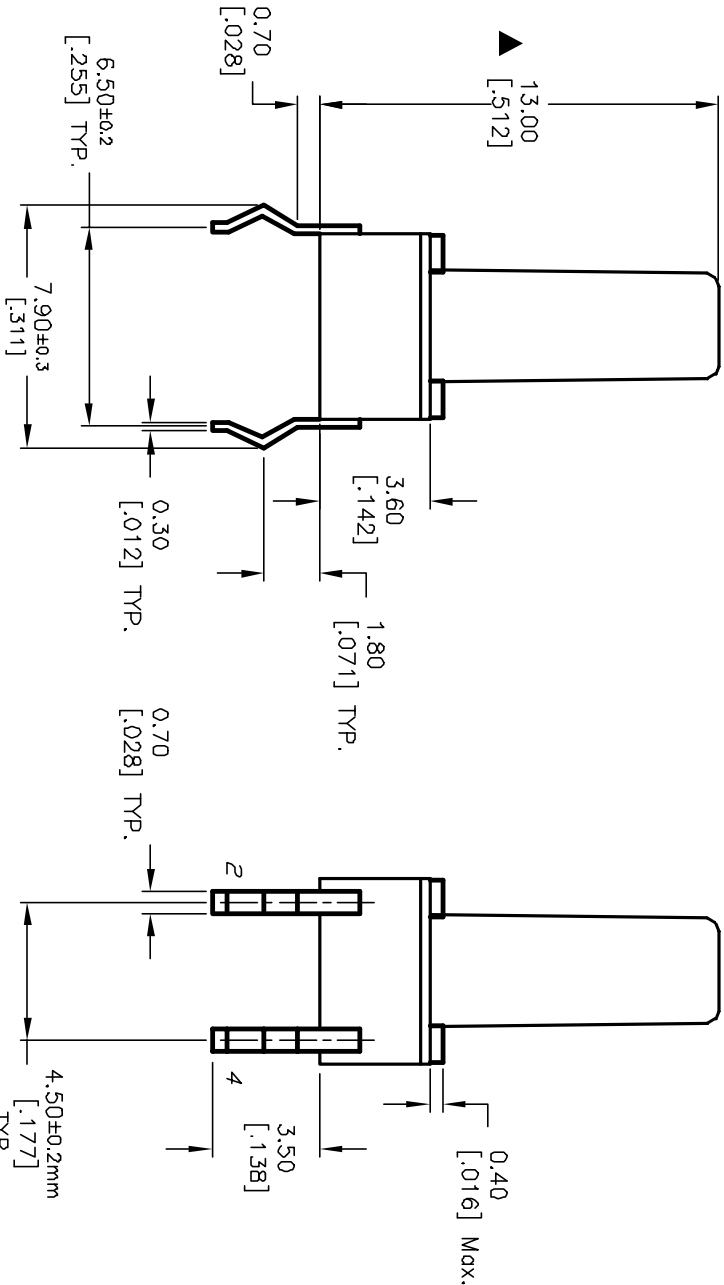

E-SWITCH®

TITLE		DATE		DR		DWG		REV	
TL1105D F100 Q		8/20/01		CJB		D310010		A	
SCALE		DATE		DR		DWG		REV	
4:1		8/20/01		CJB		D310010		A	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED		DATE		DR		DWG		REV	
RELEASED FOR PRODUCTION		8/20/01		CJB		D310010		A	
REV.		ECN No.		CHKD		D310010		A	
DESCRIPTION		DATE		CHKD		D310010		A	