



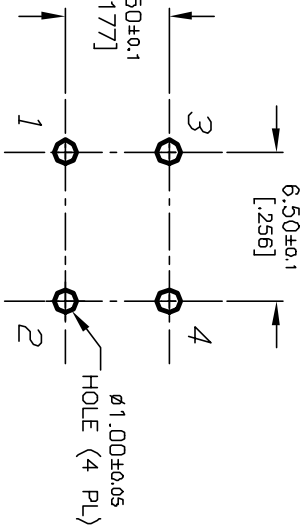


RECOMMENDED P.C.B. LAYOUT
SCALE 3:1



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. OPERATING FORCE: $250 \pm 50gf$
6. TRAVEL: $0.25 \pm 0.1mm$
7. CONTACT RESISTANCE: 100 mILLI-Ohms Max.
8. DIELECTRIC STRENGTH: 250V RMS min.
9. INSULATION RESISTANCE: 100 Mega-Ohms min.
10. ELECTRICAL LIFE: 100,000 CYCLES min.
11. ▲ DESIGNATE MAJOR FEATURE:

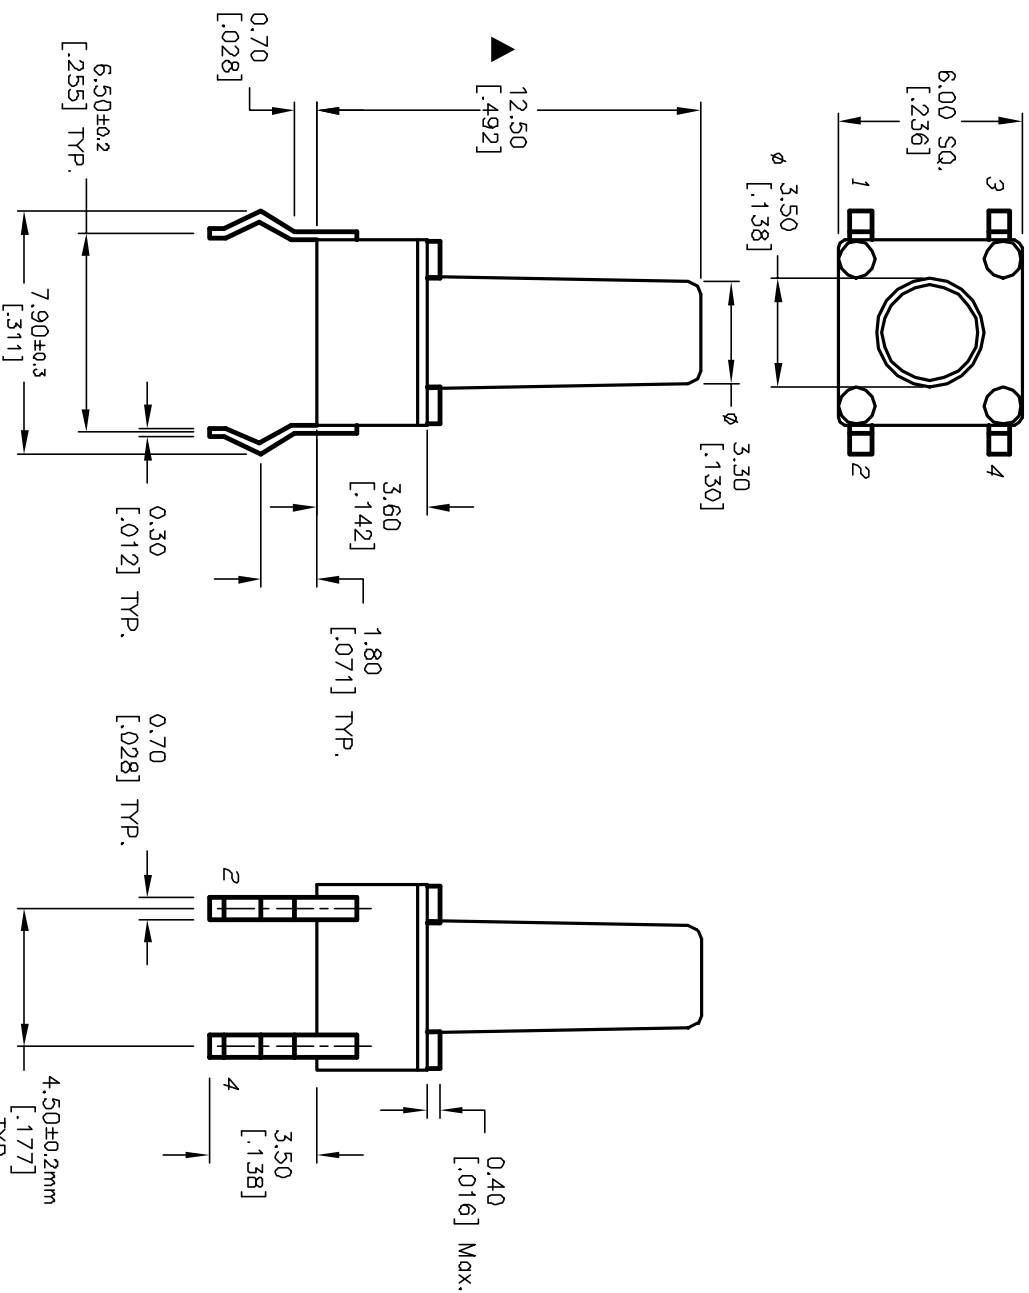

10. ELECTRICAL LIFE: 100,000 CYCLES min. 11. ▲ DESIGNATE MAJOR FEATURE:			
A	12302	RELEASED FOR PRODUCTION	7/10/02 CJB
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			

E-SWITCH®			
TITLE			
TL1105H F250 Q			
SCALE	DATE	DR	DWG
4:1	7/10/02	CJB	D310076
			REV
			A