

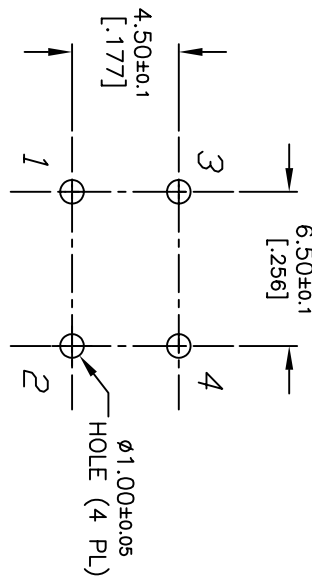


RECOMMENDED P.C.B. LAYOUT
SCALE 3:1



CIRCUIT: SPST

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATINGS: 12VDC, 50mA
 5. OPERATING FORCE: $100 \pm 50gf$
 6. TRAVEL: $0.25 \pm 0.1mm$
 7. CONTACT RESISTANCE: 100 mILLI-Ohms Max.
 8. DIELECTRIC STRENGTH: 250V RMS min.
 9. INSULATION RESISTANCE: 100 Mega-Ohms min.
 10. ELECTRICAL LIFE: 100,000 CYCLES min.
 11. ▲ DESIGNATE MAJOR FEATURE:
 12. 2002/95/EC (ROHS) COMPLIANT.

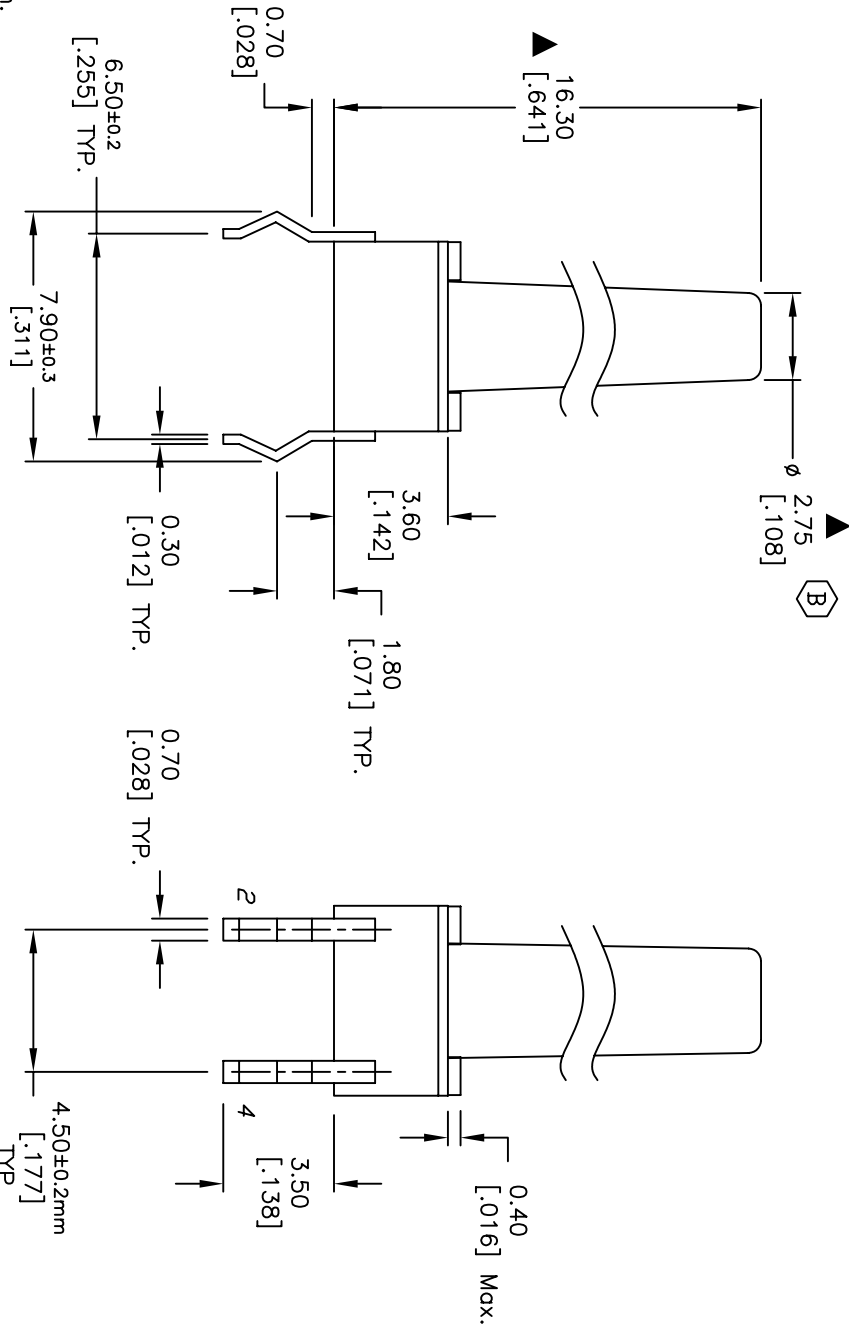

DIM CHANGE (WAS 3.30)				TITLE			
B	18460	RELEASED FOR PRODUCTION	3/20/09	BLR	E SWITCH [®]		
A	12302	DESCRIPTION	7/10/02	CJB	LAM [®]		
REV.	ECN NO.	DATE	CHKD	SCALE	DATE	DR	DWG
				4:1	3/20/09	BLR	D310080
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				TL1105Y F100 Q			
				REV B			