
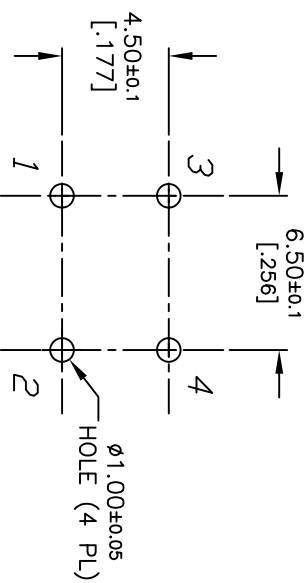


RECOMMENDED P.C.B. LAYOUT


SCALE 3:1



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. OPERATING FORCE: 250±50gf
6. TRAVEL: 0.25±0.1mm
7. CONTACT RESISTANCE: 100 mΩ—Ωms Max.
8. DIELECTRIC STRENGTH: 250V RMS min.
9. INSULATION RESISTANCE: 100 Mega—Ωms min.
10. ELECTRICAL LIFE: 100,000 CYCLES min.
11. ▲ DESIGNATE MAJOR FEATURE:
12. 2002/95/EC (ROHS) COMPLIANT.

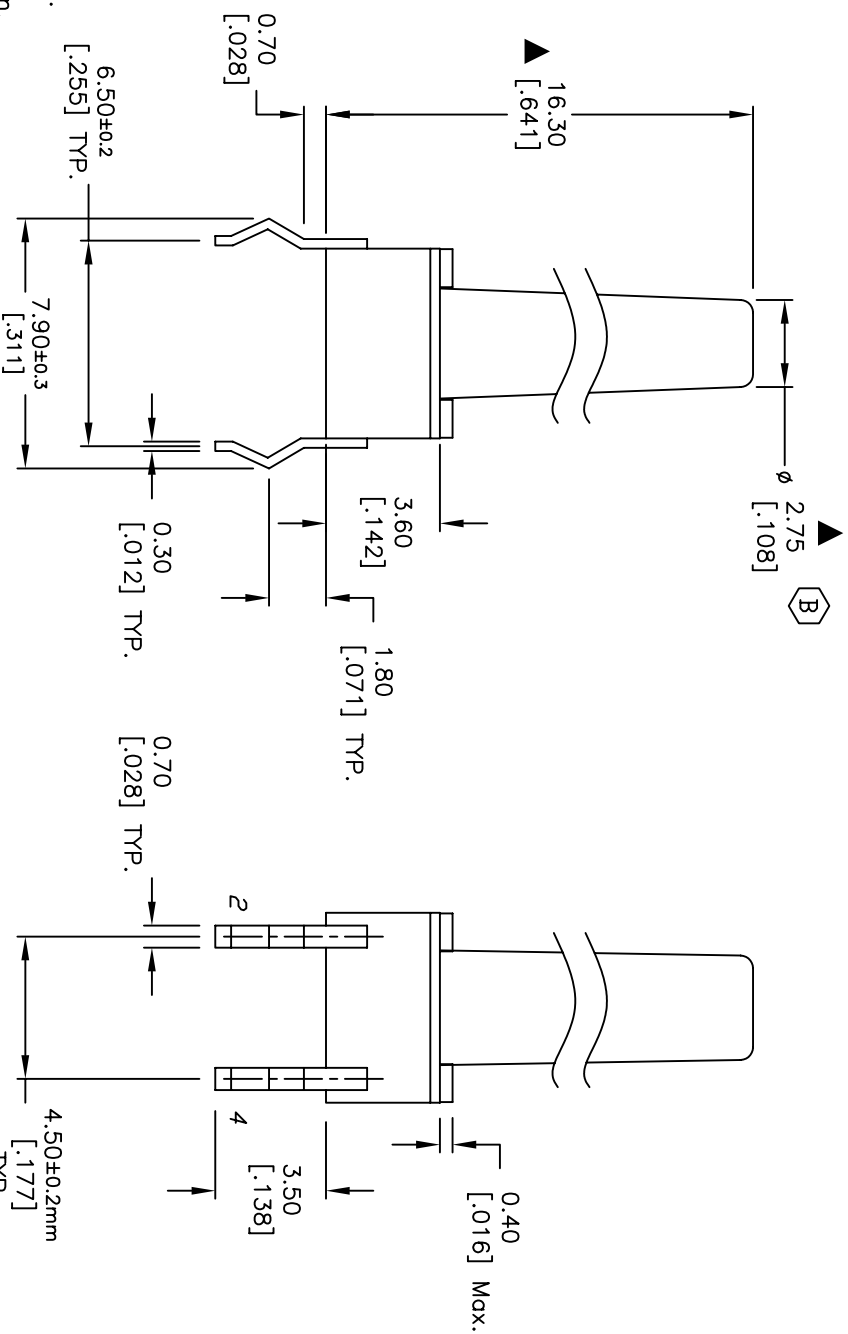

B	18460	DIM CHANGE (WAS 3.30)	3/20/09	CJB
A	12302	RELEASED FOR PRODUCTION	7/10/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

		 E-SWITCH®		 LAMB INDUSTRIES			
TITLE							
TL1105Y F250 Q							
SCALE		DATE		DR		DWG	
4:1		3/20/09		BLR		D310082	
						REV	
						B	