

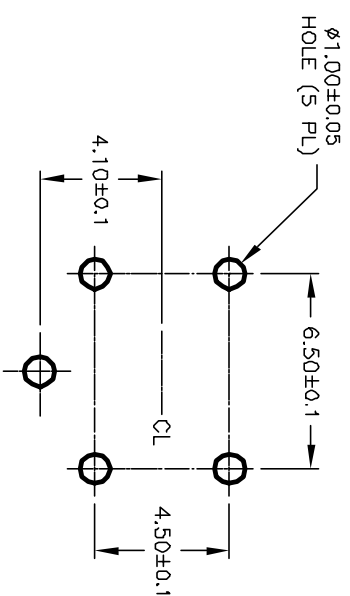
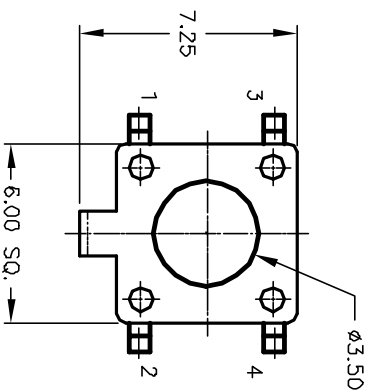



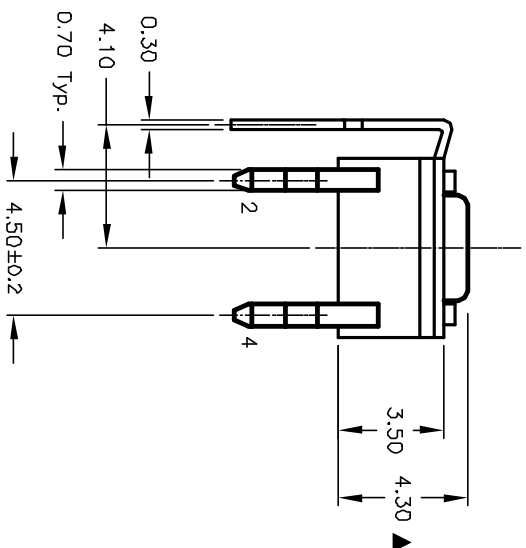

RECOMMENDED P.C.B. LAYOUT

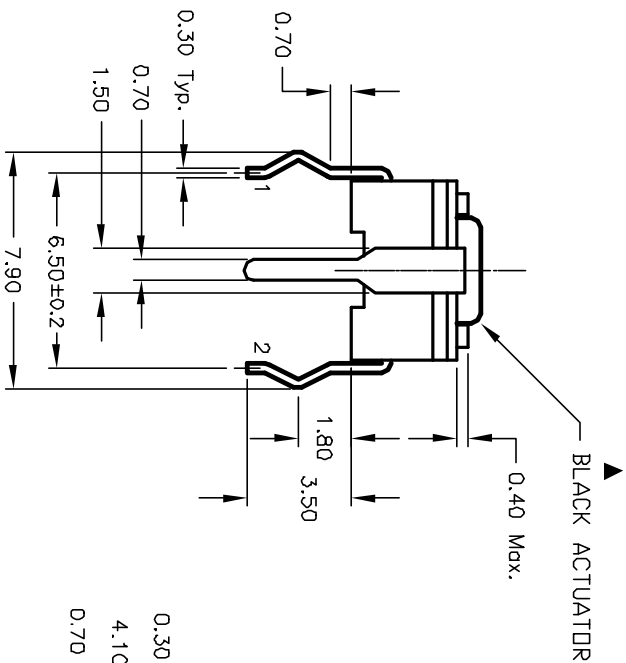

CIRCUIT: SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATINGS: 50mA @12VDC
5. CONTACT/TERMINATION MATERIAL: Silver
6. CONTACT RESISTANCE: 100 Ohms max.
7. OPERATING FORCE: 160±50gf.
8. TRAVEL: 0.25±0.1mm
9. DESIGNATE MAJOR: ▲

C	12542	REVISED PER CATALOG DESC	11/6/02	CJB	E-SWITCH®				
B	12510	REVISED MATERIAL SPEC	10/25/02	CJB	TITLE				
A	11568	RELEASED FOR PRODUCTION	7/13/01	CJB	TLE1105 F160 Q (ACTUATOR = 4.3mm)				
REV.	ECN NO.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
		THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			4:1	7/13/01	CB	D310100	C