


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. OPERATING FORCE: 160±50gf
6. TRAVEL: 0.25±0.1mm
7. CONTACT RESISTANCE: 100 Milli Ω Max.
8. DIELECTRIC STRENGTH: 250V RMS min.
9. INSULATION RESISTANCE: 100 Mega Ω min.
10. ELECTRICAL LIFE: 100,000 CYCLES min.
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (ROHS) COMPLIANT.

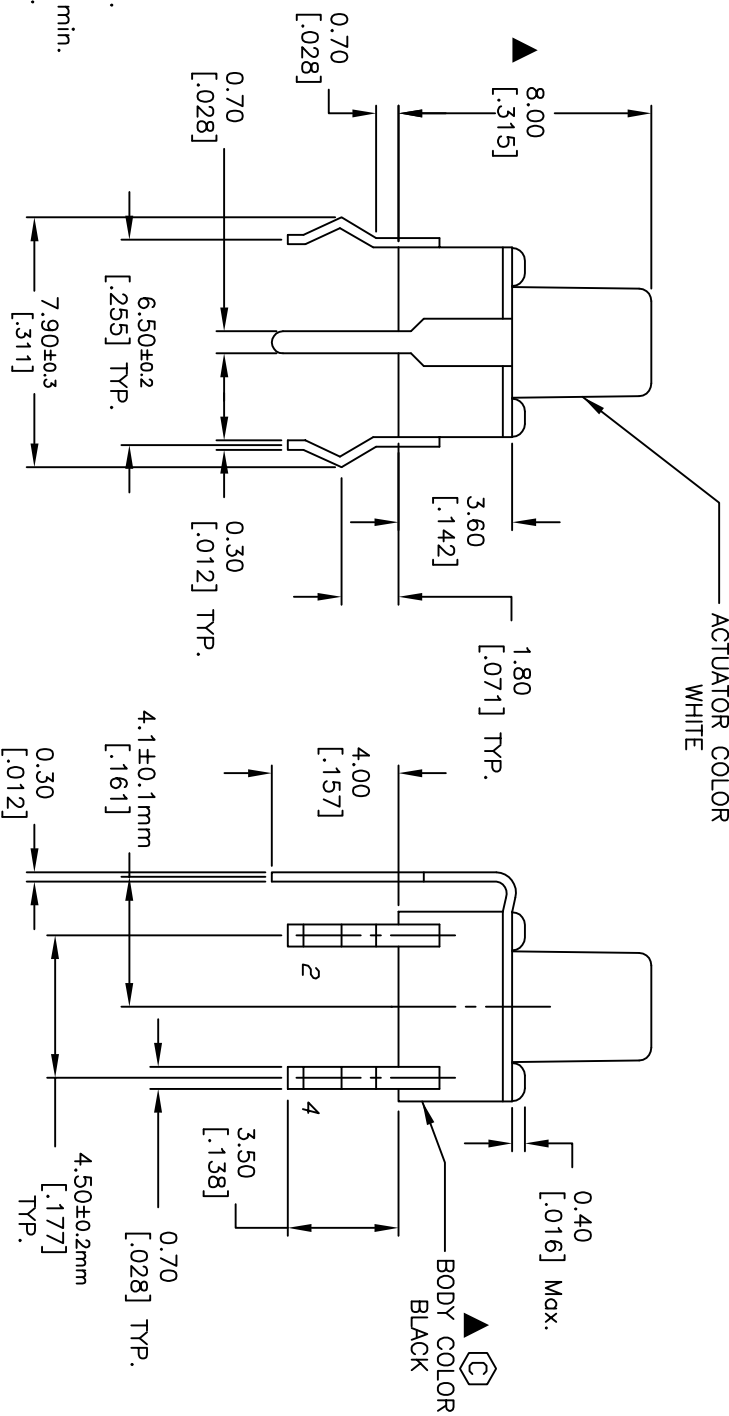

C	19222	DEFINE BLACK COLOR OF BODY	7/26/10	BLR	 E-SWITCH®  LAMB INDUSTRIES™
B	19216	DEFINE WHITE COLOR OF ACTUATOR	7/22/10	BLR	
A	11625	RELEASED FOR PRODUCTION	8/22/01	CJB	
REV.	ECN No.	DESCRIPTION	DATE	CHKD	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					
		TITLE			TLE 1105C F160 Q
SCALE	DATE	DR	DWG	REV	
4:1	7/22/10	BLR	D310103	C	