
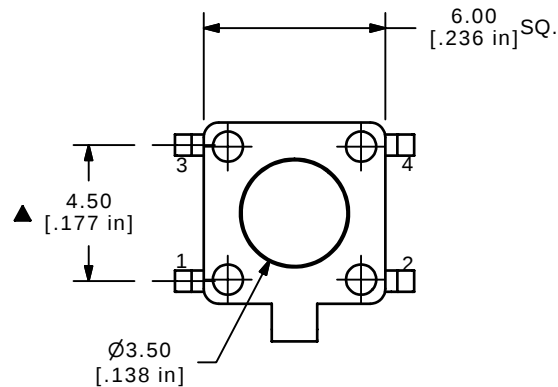
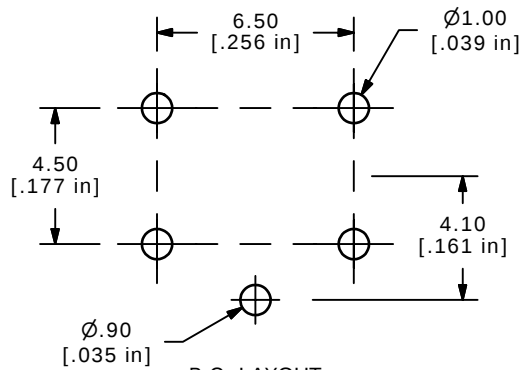




ISOMETRIC



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
3. TERM. NUMBERS FOR REF. ONLY.
4. RATING: 50mA @ 12VDC
- ▲5. OPERATING FORCE: 160± 50gf
6. TRAVEL: 0.25± 0.1 mm
7. CONTACT RESISTANCE: 100 mΩ MAX.
- ▲8. CONTACT MATERIAL: SILVER
9. DIELECTRIC STRENGTH: 250V RMS min.
10. INSULATION RESISTANCE: 100 MEGAΩ min.
11. ELECTRICAL LIFE: 80,000 CYCLES
12. ▲ DENOTES CRITICAL PARAMETER.
13. OPERATING TEMP: -30°C TO 85°C
14. 2002/95/EC (ROHS) COMPLIANT
- ▲15. PACKAGE: POLYBAG/ 1,000 PIECES PER BAG

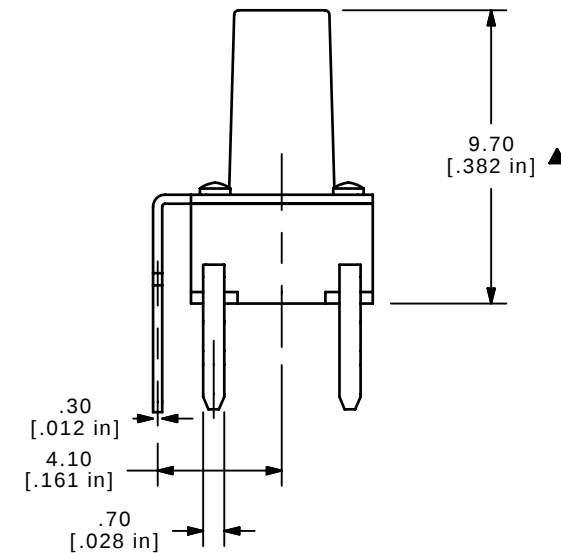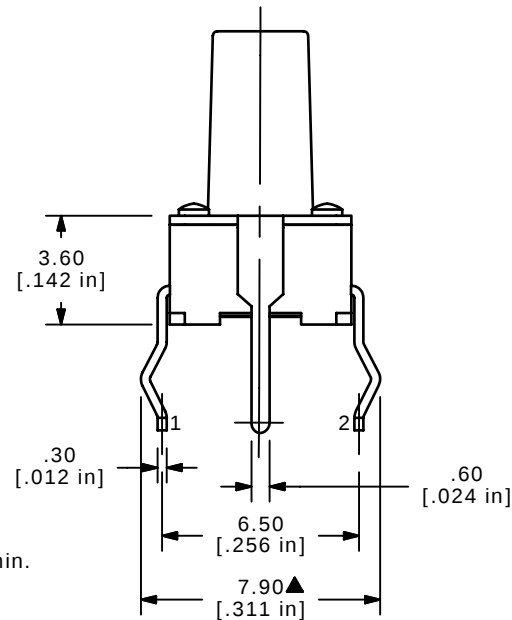

TITLE TLE1105GF160Q

SCALE 4:1

DATE 3/8/2007

DR TN

DWG D310118

REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

B	17075	FIXED OPERATING FORCE NOTE	3/8/07	TN
A	17008	RELEASED FOR PRODUCTION	2/21/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY