




RECOMMENDED P.C.B. LAYOUT

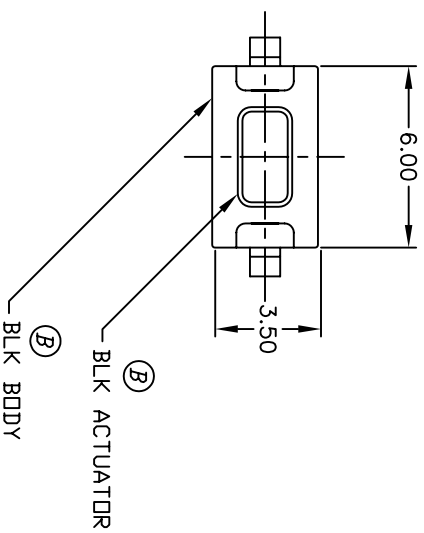

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. OPERATING FORCE: $180 \pm 50gf$
6. TRAVEL: $0.25 \pm 0.1mm$
7. CONTACT RESISTANC: 100 Ω Max.
8. CONTACT MATERIAL: SILVER
9. MECHANICAL/ELECTRICAL LIFE: 50,000 CYCLES
10. PACKAGE: BULK
11. 2002/95/EC (ROHS) COMPLIANT

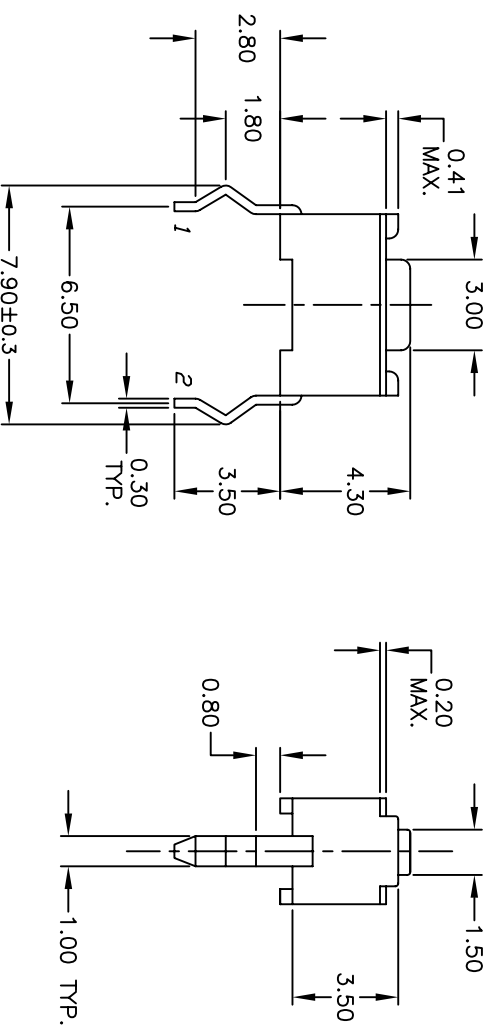

11. 2002/95/EC (ROHS) COMPLIANT			
D	16633	UPDATED NOTES	11/9/06
C	13940	UPDATE TITLE TO ADD MATERIAL	4/19/04
B	11519	ADD BLK BODY/ACTUATOR	5/31/01
REV.	ECN No.	DESCRIPTION	DATE
			CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE 4:1			
DATE 11/9/2006			
DR TN			
DWG D310310			
REV D			
TITLE			
TL1107AF180WQ			
E-SWITCH®			