




RECOMMENDED P.C.B. LAYOUT

NOT TO SCALE

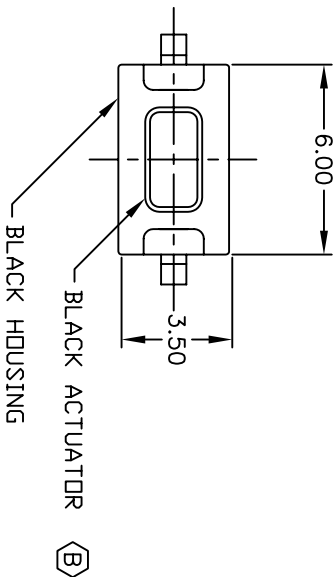

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. CONTACT MATERIAL: SILVER
6. OPERATING FORCE: $130 \pm 50 \text{gf}$
7. TRAVEL: $0.25 \pm 0.1 \text{mm}$
8. CONTACT RESISTANCE: $100 \text{m}\Omega - 0 \text{ohms Max.}$
9. MECHANICAL/ELECTRICAL LIFE: 50,000 CYCLES
10. PACKAGE: BULK
11. 2002/95/EC (ROHS) COMPLIANT

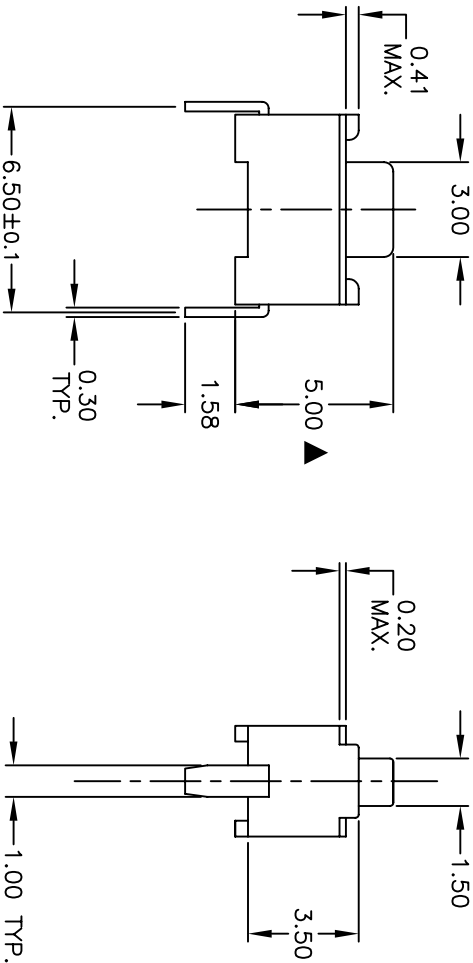

										
C	16640	UPDATED NOTES	11/10/06	TN	TITLE TL1107BF130BQ					
B	14840	CORRECT ACTUATOR COLOR	4/7/05	AR						
A	12584	RELEASED FOR PRODUCTION	11/21/02	CJB	SCALE 4:1					
REV.	ECN No.	DESCRIPTION	DATE	CHKD						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					DATE 11/10/2006					
					DR TN		DWG D310382		REV C	