


PCB LAYOUT








CIRCUIT DIAGRAM

SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	2-3, 4-5

() = MOMENTARY

NOTES:

1. ALL DIMENSIONS IN mm [INCHES]
2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.1A; 30V
5. CONTACT RESISTANCE: 100 mILLI-OHMS MAX.
6. TIMING: NON-SHORTING
7. TRAVEL: FULL 2.5mm
- ▲ 8. OPERATING FORCE: $200 \pm 80gf$
9. ELECTRICAL LIFE: 10,000 CYCLES MAKE AND BREAK
CYCLES AT FULL LOAD
10. ▲ DENOTE CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

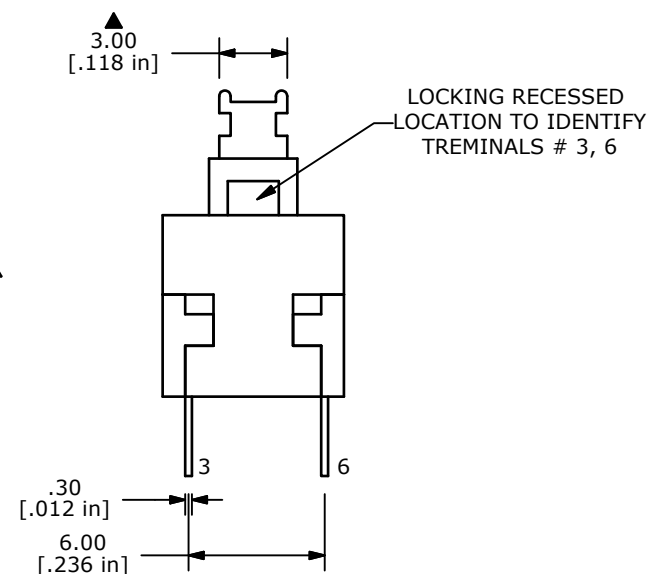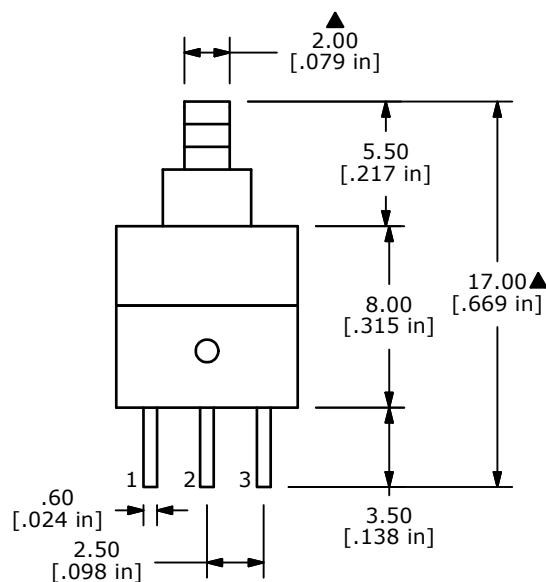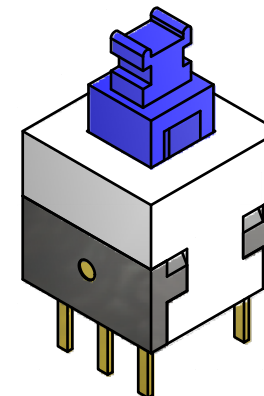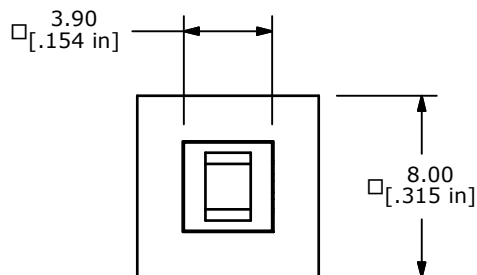

TITLE TL2285OAF200

SCALE 3:1

DATE 2/1/2011

DR BGL

DWG D310450

REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

C	19746	CORRECT SWITCH FUNCTION NUMBERS	3/9/11	BGL
B	19639	DRAWING UPDATE	2/1/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY