
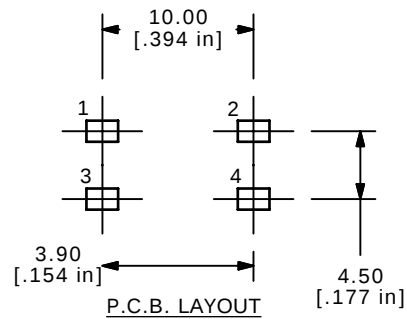

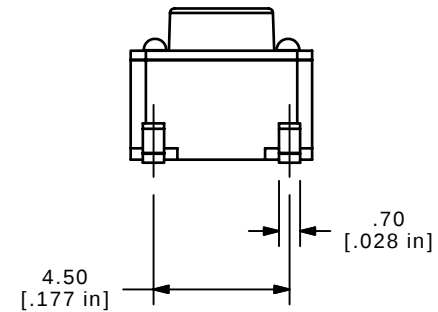
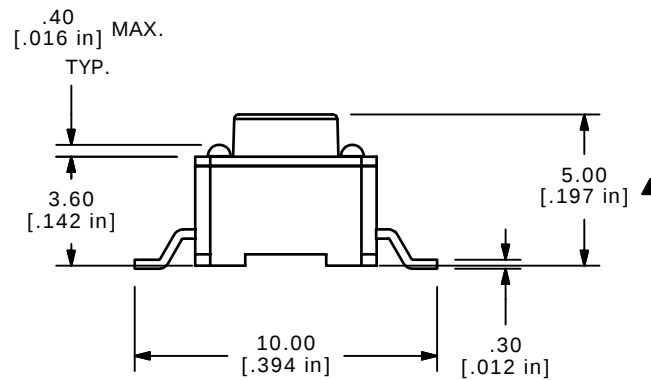


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲5. OPERATING FORCE: 520 ± 100 gms
6. TRAVEL: 0.25mm ±0.10
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. LIFE: 80,000 CYCLES
- ▲9. SILVER CONTACTS
- ▲10. PACKAGE: TAPE AND REEL, 1000 PIECES PER REEL
11. ▲DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

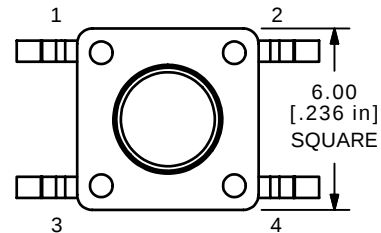

ISOMETRIC

B	16224	REV NOTE 10	7/10/06	SL
A	16063	NEW PART RELEASE	6/1/06	CT
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE TL3301AF520QG

SCALE 4:1

DATE 6/1/2006

DR CT

DWG D310510

REV B