
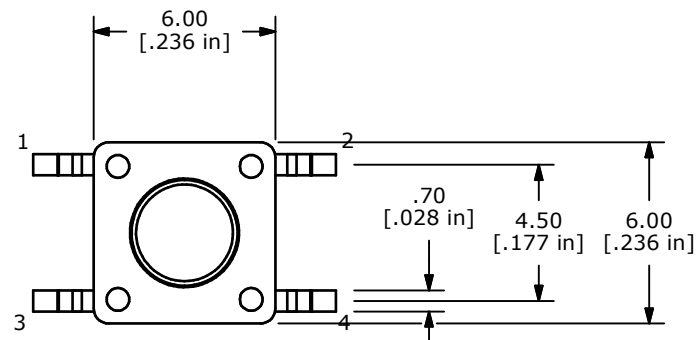

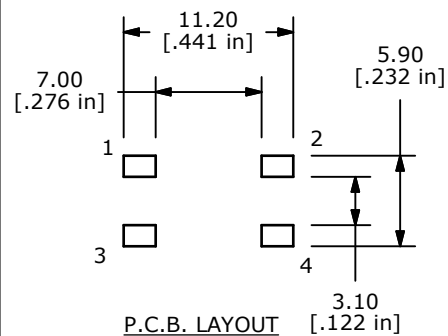


ISOMETRIC

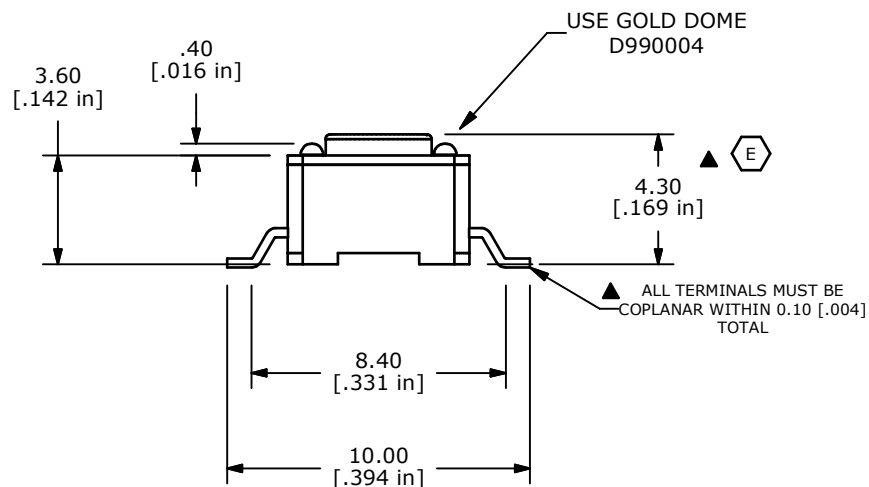

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
- ▲ 5. OPERATING FORCE: 260 ± 50 gms
6. TRAVEL: 0.3mm ± 0.15
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. GOLD CONTACTS
- ▲ 10. PACKAGE: TAPE AND REEL, 1000 PIECES PER REEL
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2002/95/EC (RoHS) COMPLIANT.

E	18707	CHANGE ACTUATOR DIM (WAS 4.35)	11/9/09	BLR
D	16240	ADD GOLD DOME FOR BOM	7/14/06	AR
C	14817	ADD PACKAGING NOTE	4/1/05	AR
B	13883	ADD COPLANAR NOTE AND DIM	3/29/04	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL3301NF260RG

SCALE 4:1

DATE 11/9/2009

DR BLR

DWG D310526

REV E