

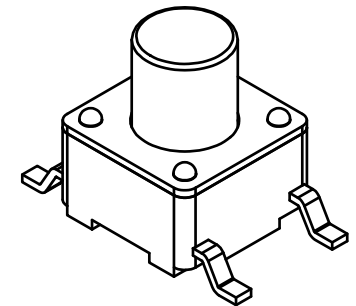
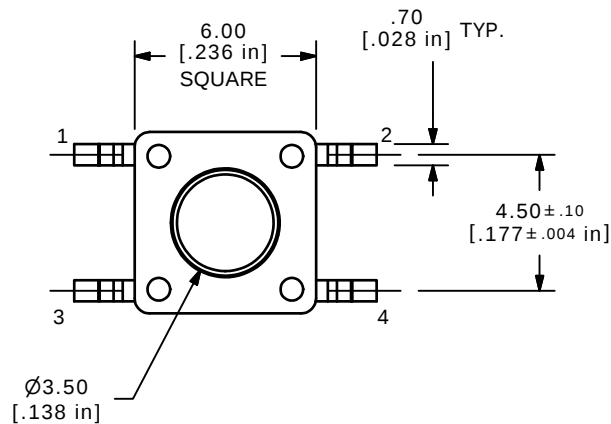

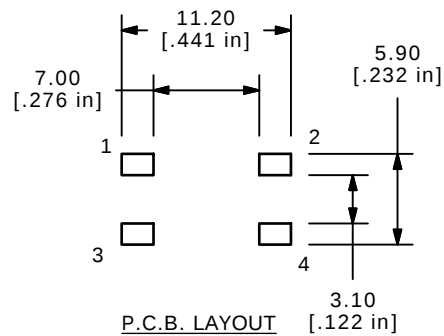




ISOMETRIC

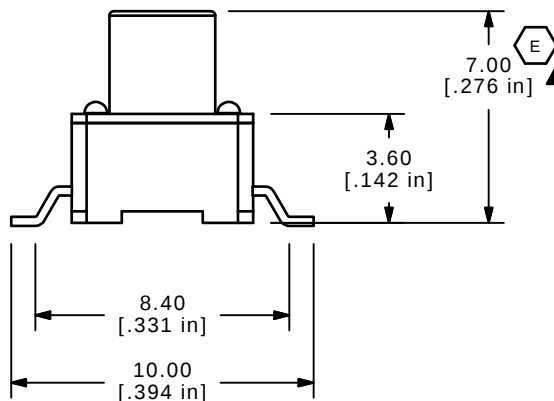

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
- ▲ 5. OPERATING FORCE: 260 ± 50 GF
6. TRAVEL: $0.25\text{MM} \pm 0.1\text{MM}$
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. SILVER CONTACTS
- ▲ 10. PACKAGE: 700 PCS PER TAPE AND REEL
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT
13. REEL WIDTH: 16.0mm



E	19466	CORRECT ACTUATOR HEIGHT	11/22/10	BMA
D	19360	ADD REEL WIDTH	10/18/10	BMA
C	15967	UPDATE TITLE AND REPLACE ACTUATOR	4/17/06	CT
B	15945	REVISED AND REDRAWN	4/5/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®



TITLE TL3301FF260QG

SCALE 4:1

DATE 4/5/2006

DR AR

DWG D310532

REV E