

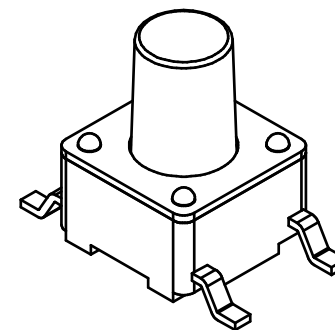
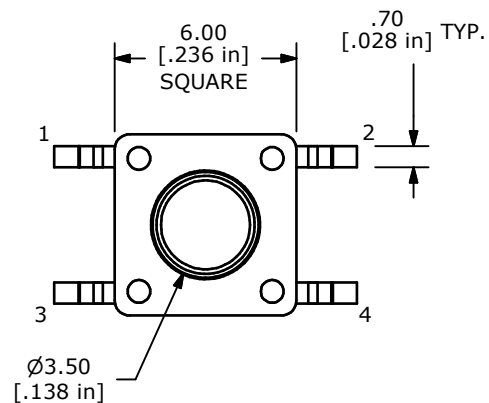

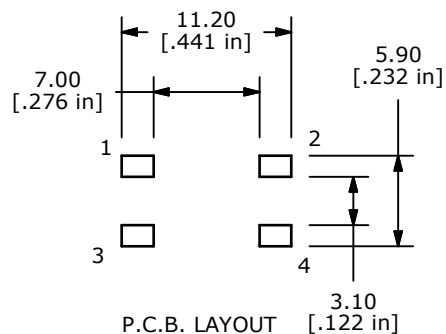




ISOMETRIC

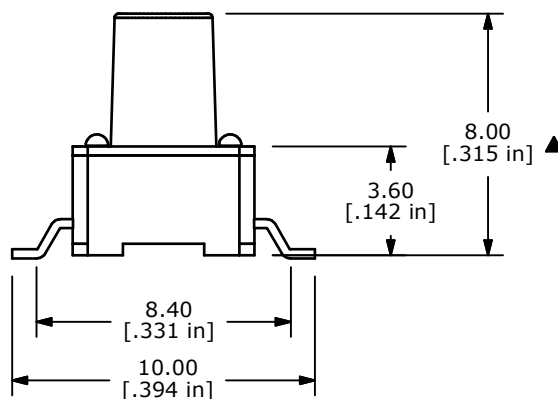

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
- ▲ 5. OPERATING FORCE: 260 ± 50gf
6. TRAVEL: 0.25mm ±0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. SILVER CONTACTS
- ▲ 10. PACKAGING: TAPE AND REEL, 700 PCS PER REEL (F)
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT
13. REEL WIDTH: 16.0mm (G)

G	19360	ADDED REEL WIDTH	10/15/10	BMA
F	19248	CHANGE PART QUANTITY PER REEL	8/13/10	BLR
E	18606	CHANGE PART QUANTITY PER REEL	9/14/09	BLR
D	16570	UPDATE NOTES	10/24/06	AR
C	15992	UPDATE NOTES	4/27/06	AR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL3301CF260QG

SCALE 4:1

DATE 8/13/2010

DR BLR

DWG D310539

REV G