



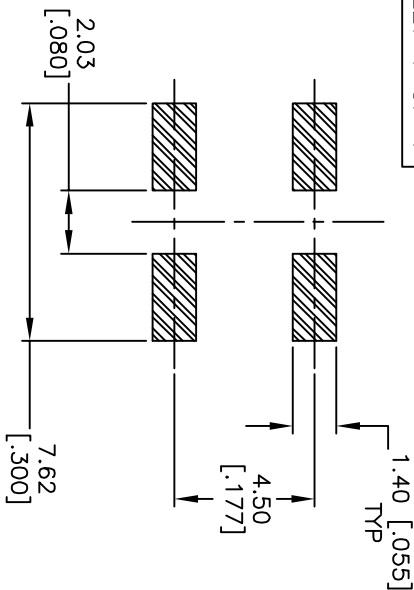

RECOMMENDED MOUNTING PAD
SCALE: 4:1






NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. BODY & STEM: PPS RYTON R-4
ACTUATOR COLOR: WHITE
BODY: BROWN
- ▲ 6. OPERATING FORCE: 260 ±50gf
7. TRAVEL: 0.25 ±0.1mm
8. CONTACT RESISTANCE: 100 MILL OHMS MAX. (INITIAL)
- ⓔ 9. PACKAGED: TAPE & REEL, 700 PCS. PER REEL
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT.
- ⓕ 12. REEL WIDTH: 16.0mm

F	19360	CHANGED REEL WIDTH	10/15/10	BMA
E	19307	CHANGE PART QUANTITY PER REEL	9/15/10	BLR
D	18606	CHANGE PART QUANTITY PER REEL	9/15/09	BLR
C	16582	UPDATE NOTES	10/25/06	TN
B	15990	UPDATE TITLE AND PACKAGED NOTE	4/27/06	CT
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

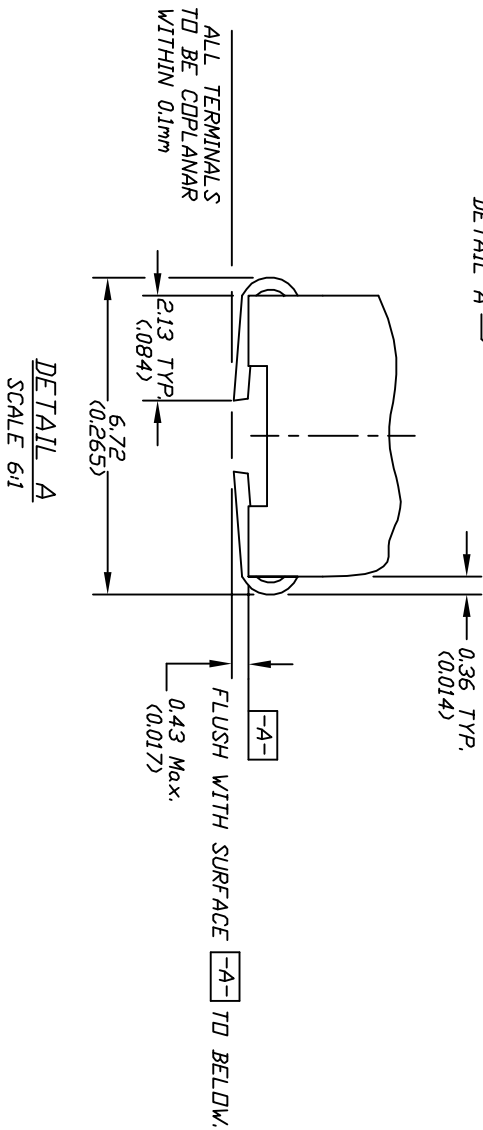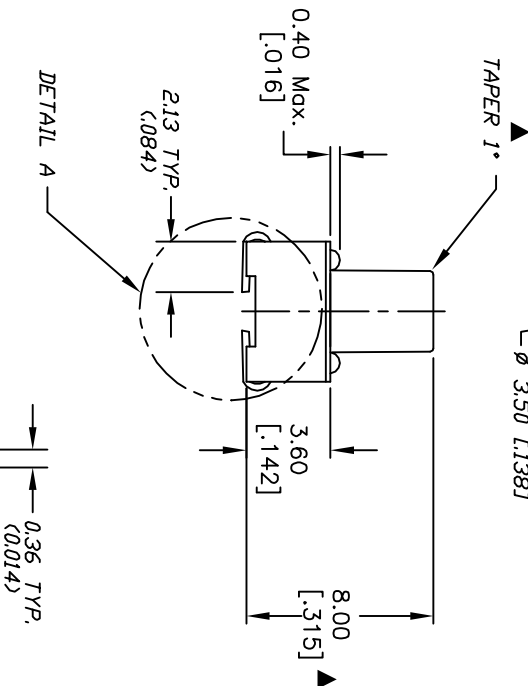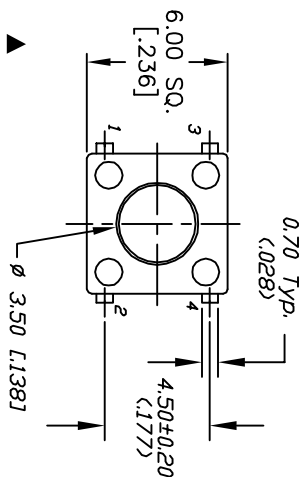

ALL TERMINALS
TO BE COPLANAR
WITHIN 0.1mm

FLUSH WITH SURFACE -A- TO BELOW.

DETAIL A
SCALE 6:1

TITLE		TL3301CF260QJ	
SCALE	DATE	DR	DWG
3:1	9/15/09	BLR	D310540
REV		F	

