



NOTES:


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. CONTACT RATING: 50mA @12V DC
4. CONTACT MATERIAL: SILVER
5. OPERATING FORCE: 260 ± 50 gf
6. TRAVEL: $0.25 + 0.2/-0.1$
7. CONTACT RESISTANCE: 100mILLI Ohms max.
8. ELECTRICAL LIFE: 100,000 CYCLES
9. PACKAGING:
CARRIER IS FOLDED EVERY 25 PITCHES
(24) SWITCHES PER FOLD
(1,000) SWITCHES PER BOX



CIRCUIT: SPST

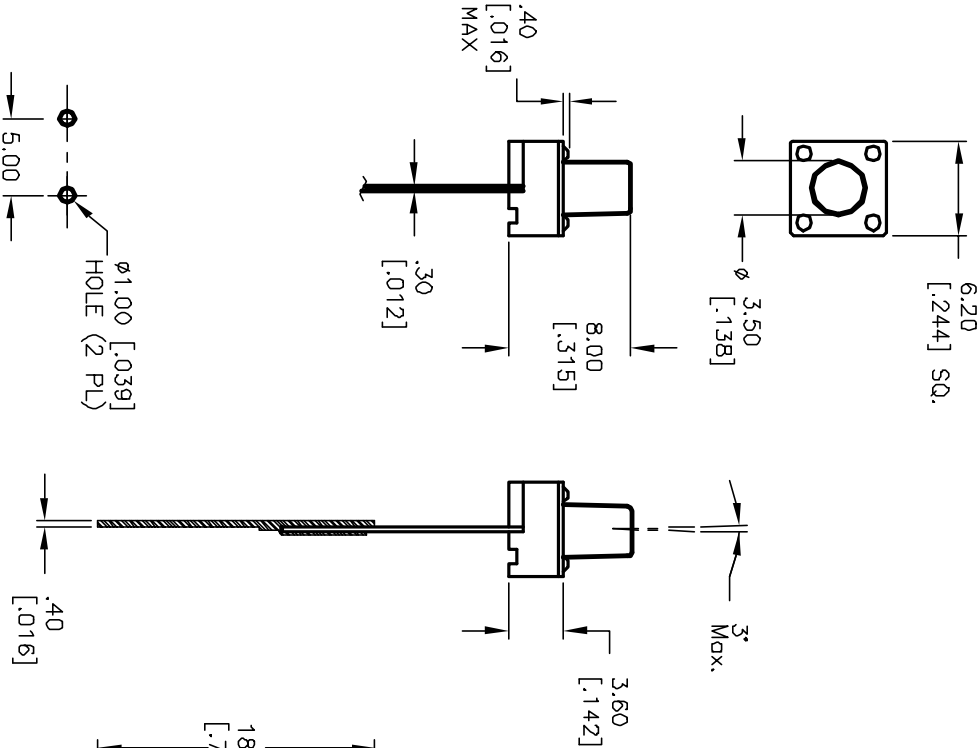

RECOMMENDED P.C.B. LAYOUT

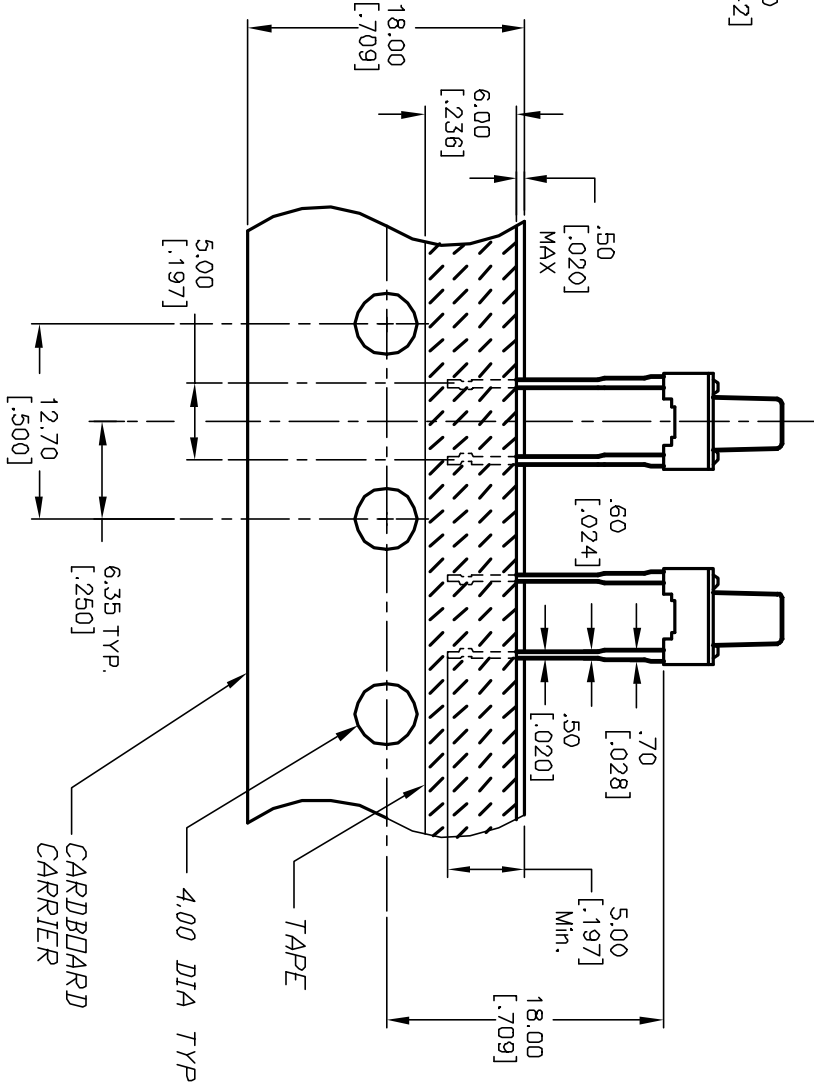

E-SWITCH®

				TITLE				
A	11623	RELEASED FOR PRODUCTION	8/21/01	CB	TL59C F260 Q			
REV.	ECN No.	DESCRIPTION	DATE	CHKD				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								
SCALE			DATE	DR	DWG	REV		
2:1			8/21/01	CB	D310563	A		