


1. ALL DIMENSIONS IN MM [INCH]
X.XX=±0.04
2. GENERAL TOLERANCE: X.X=±0.4
3. CONTACT RATING: 50mA @12V DC
4. CONTACT MATERIAL: SILVER
5. OPERATING FORCE: 160±50gf
6. TRAVEL: 0.25 +0.2/-0.1
7. CONTACT RESISTANCE: 100mΩ Ohms max.
8. ELECTRICAL LIFE: 100,000 CYCLES
9. PACKAGING:
CARRIER IS FOLDED EVERY 25 PITCHES
(24) SWITCHES PER FOLD)
(1,000) SWITCHES PER BOX

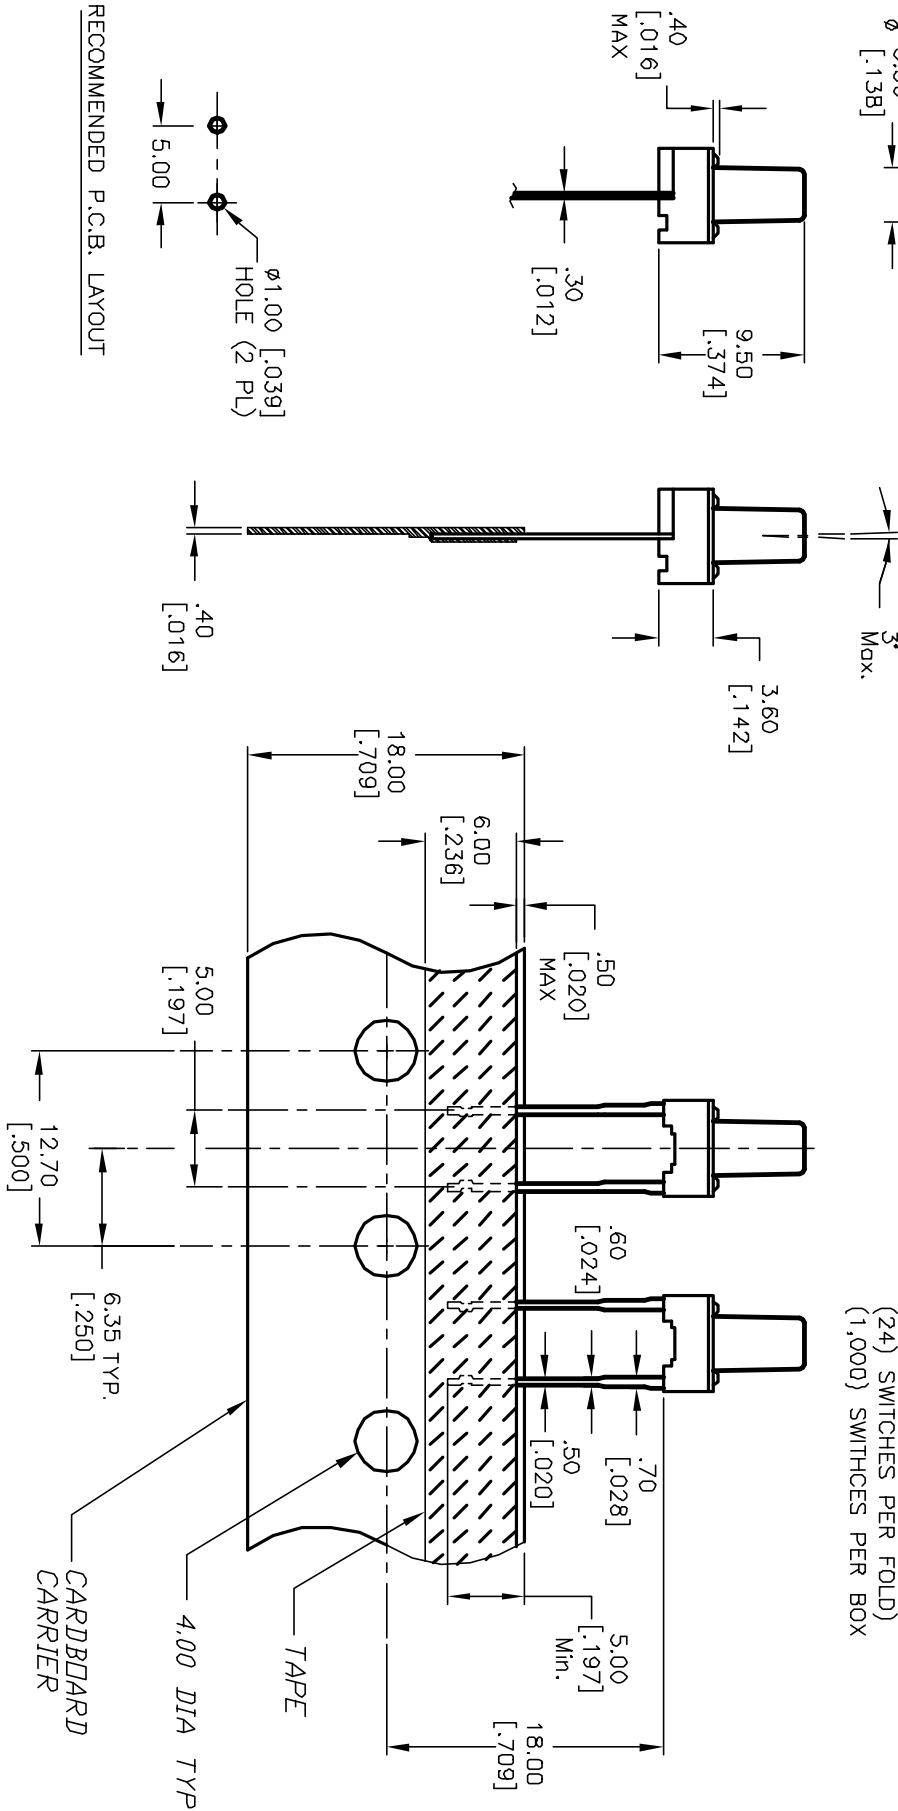

RECOMMENDED P.C.B. LAYOUT

E-SWITCH®				
TITLE				
TL 59B F160 Q				
SCALE	DATE	DR	DWG	REV
2:1	8/21/01	CB	D310567	B