


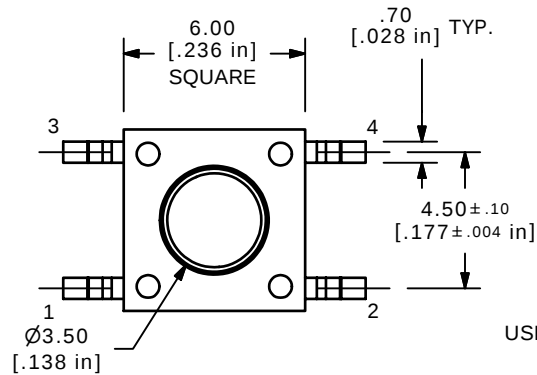



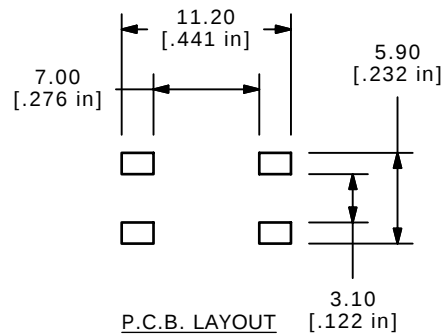

USE GOLD DOME  
D990005

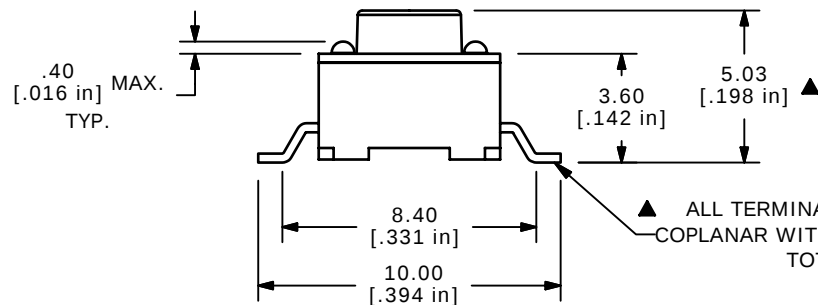

ALL TERMINALS MUST BE  
COPLANAR WITHIN 0.10 [ .004 ]  
TOTAL

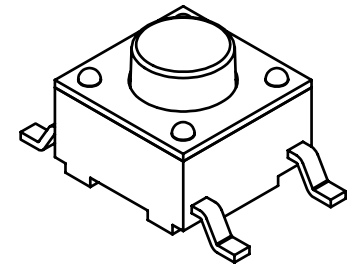

ISOMETRIC

## NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
5. OPERATING FORCE: 160 ± 50 gms
6. TRAVEL: 0.3mm ± 0.15
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
9. CONTACTS: GOLD
10. BODY AND STEM: HIGH TEMP. PLASTIC -PPS RYTON-R-4
11. PACKAGED TAPE AND REEL- 1000 PIECES PER REEL.
12. 2002/95/EC (ROHS) COMPLIANT
13. DENOTES CRITICAL PARAMETER



**E-SWITCH®**

|     |        |                               |          |    |
|-----|--------|-------------------------------|----------|----|
| B   | 15386  | ADD ROHS NOTE, GOLD DOME INFO | 10/12/05 | PH |
| A   | 14804  | UPDATE PAKAGE NOTE, REDRAWN   | 3/30/05  | AR |
| REV | PCR NO | DESCRIPTION                   | DATE     | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL3301AF160RG

SCALE 4:1

DATE 7/29/02

DR CJB

DWG D310592

REV B