

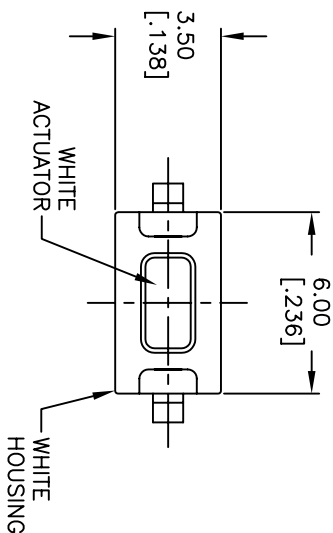


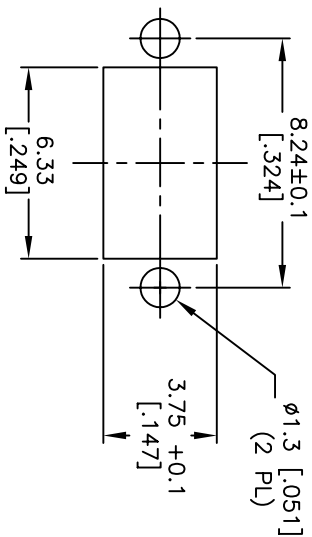


RECOMMENDED P.C.B. CUTOUT



CIRCUIT DIAGRAM:

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. CONTACT MATERIAL: SILVER
6. OPERATING FORCE: 260±50gf
7. TRAVEL: 0.25±0.1mm
8. CONTACT RESISTANCE: 100Ω Max.
9. LIFE: 30,000 Cycles min.
10. PACKAGE: BULK
11. 2002/95/EC (ROHS) COMPLIANT

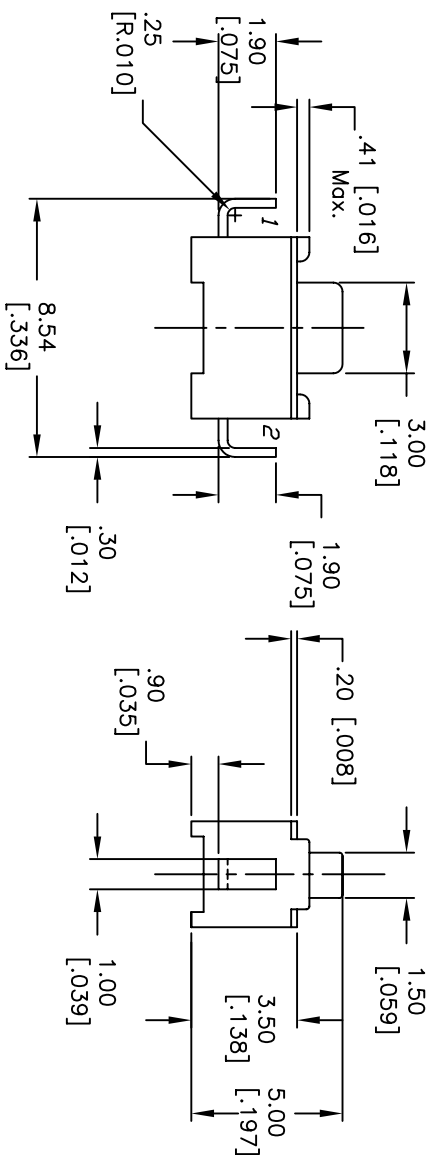

C	16631	UPDATED NOTES	11/9/06	TN	 TL1107BF260EQ				
B	14270	ADD HOUSING, ACTUATOR COLOR	8/26/04	AR					
A	11831	RELEASED FOR PRODUCTION	--	--					
REV.	ECN No.	DESCRIPTION	DATE	CHKD					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					4:1	11/9/2006	TN	D310685	C