SHEET OF

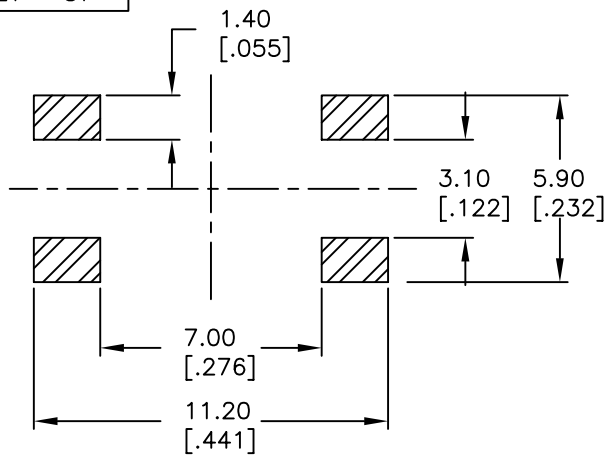

RECOMMENDED MOUNTING PAD



CIRCUIT: SPST

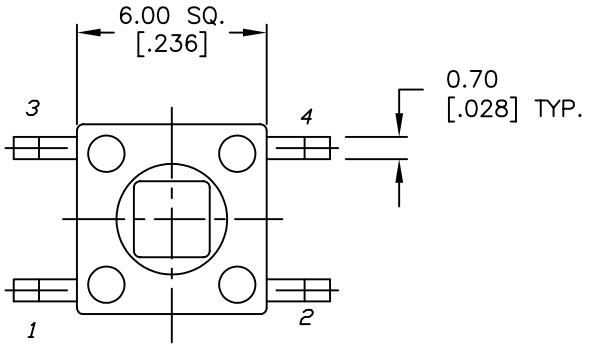

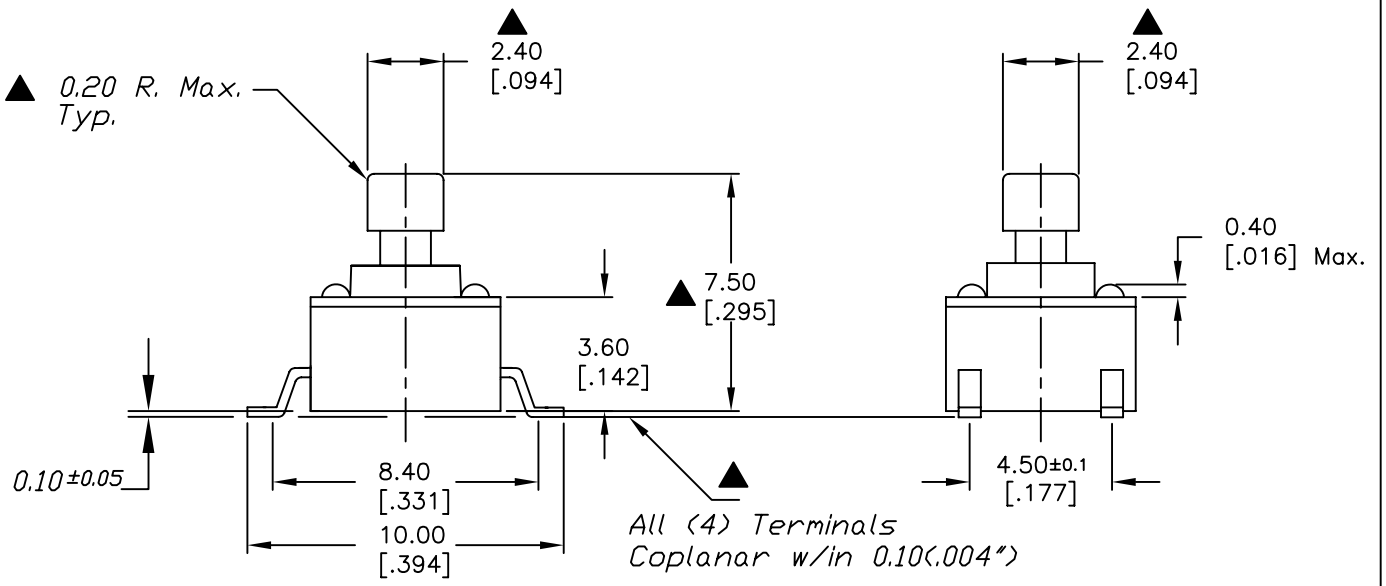

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. CONTACT MATERIAL: Silver
6. ▲ OPERATING FORCE: 260±50gf
7. TRAVEL: 0.25±0.1mm
8. CONTACT RESISTANCE: 100Ω Max.
9. ELECTRICAL LIFE: 100,000 CYCLES min.
10. ▲ DESIGNATE MAJOR FEATURE:
11. BODY& STEM: HIGH TEMP. PLASTIC –PPS RYTON–R–4
12. ▲ PACKAGED: TUBE
13. 2002/95/EC (ROHS) COMPLIANT

REV.	ECN No.	DESCRIPTION	DATE	CHKD
C	15488	REMOVE GOLD DOME INFO	11/2/05	PH
B	15467	GOLD DOME, ROHS NOTE	10/27/05	PH
A	11584	RELEASED FOR PRODUCTION	11/25/02	CJB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: TL3301 T F260 Q G (TUBE)

SCALE	DATE	DR	DWG	REV
4:1	7/26/01	CJB	D310787	C