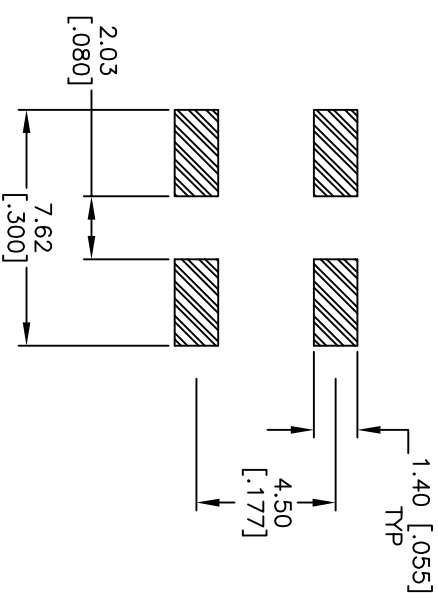
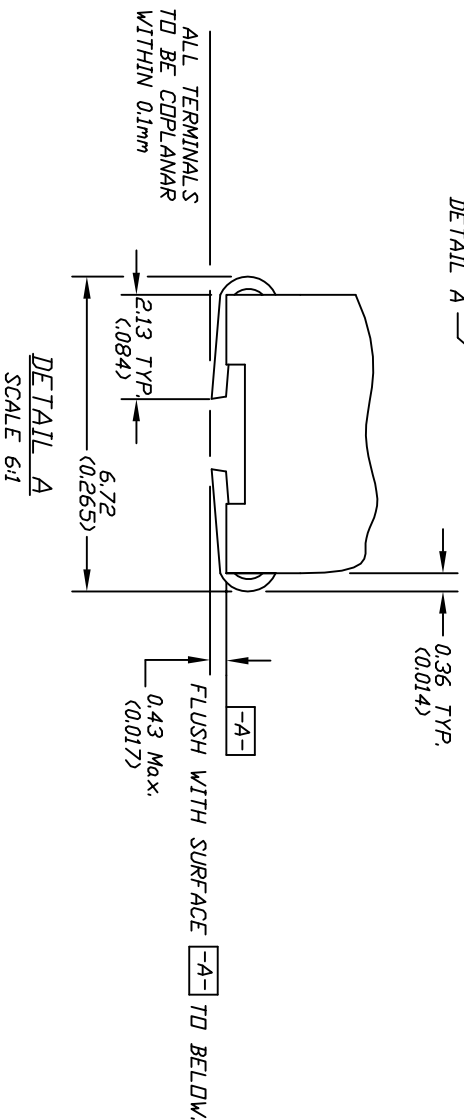
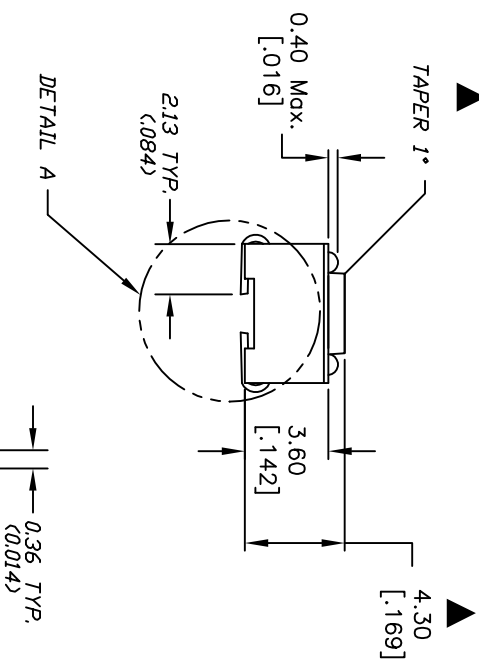
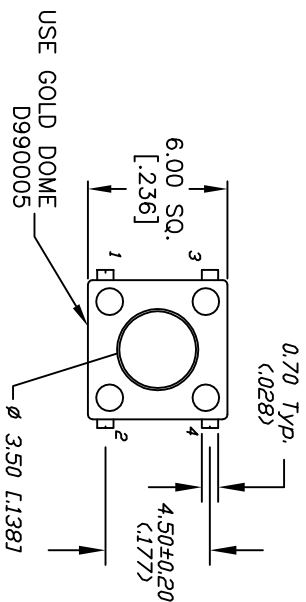


CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @50VDC (GOLD CONTACTS)
5. BODY & STEM: PPS RYTON R-4
6. OPERATING FORCE: 160gf +50/-30grams
7. TRAVEL: 0.25 +0.2/-0.1mm
8. CONTACT RESISTANCE: 100 ohms max.
9. PACKAGED: TAPE & REEL, 1,000 PIECES PER REEL
10. ▲ DESIGNATE MAJOR FEATURE:
11. 2002/95/EC (ROHS) COMPLIANT

11. 2002/95/EC (ROHS) COMPLIANT				
E	18606	CHANGE PART QUANTITY PER REEL	9/15/09	BLR
D	16901	D990006 TO D990005	1/22/07	TN
C	16882	P990006 TO D990006	1/18/07	TN
B	15467	GOLD DOME ROHS NOTE	10/27/05	PH
A	12304	RELEASED FOR PRODUCTION	7/30/01	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
SCALE		DATE		DR
3:1		9/15/09		BLR
TITLE		TL3301NF160RJ		