





RECOMMENDED MOUNTING PAD

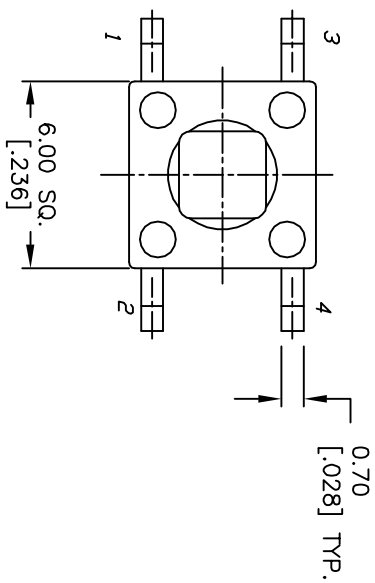

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X=\pm 0.4$
 $X.XX=\pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATINGS: 12VDC, 50mA
5. CONTACT MATERIAL: Silver
6. OPERATING FORCE: $260\pm 50\text{gf}$
7. TRAVEL: $0.25\pm 0.1\text{mm}$
8. CONTACT RESISTANCE: 100 m Ω Max.
9. ELECTRICAL LIFE: 100,000 CYCLES min.
10. DESIGNATE MAJOR FEATURE:
11. BODY & STEM: HIGH TEMP. PLASTIC -PPS RYTON-R-4
12. PACKAGED: TAPE & REEL 700 PCS PER REEL (D)
13. 2002/95/EC (ROHS) COMPLIANT
14. REEL WIDTH: 16.0mm (D)

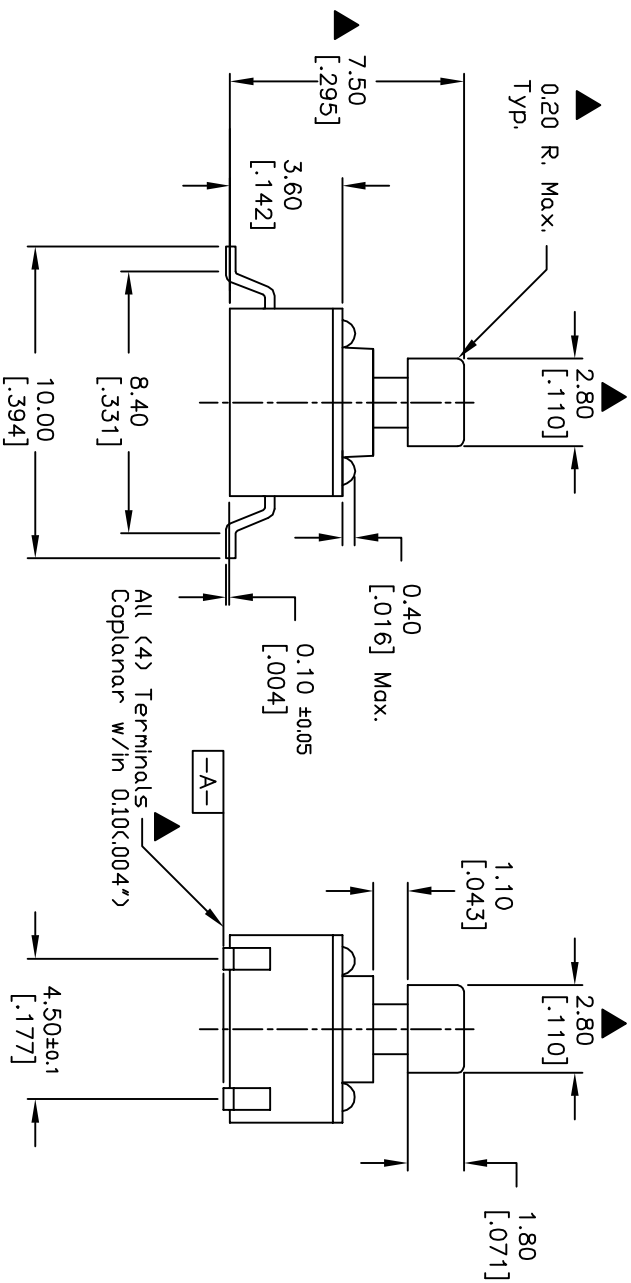

D	19360	MISC. NOTE UPDATES	10/18/10	BMA
C	15488	REMOVE GOLD DOME INFO	11/2/05	PH
B	15467	GOLD DOME, RDHS NOTE	10/27/05	PH
A	11622	RELEASED FOR PRODUCTION	8/21/01	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
SCALE		TITLE		
4:1		TL 3301 SP F260 Q G (TAPE & REEL)		
DATE		DR	DWG	REV
8/21/01		CJB	D310799	D