
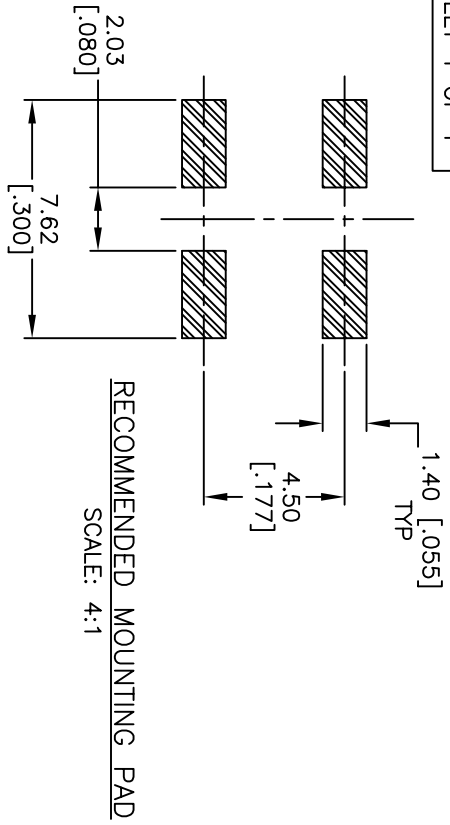
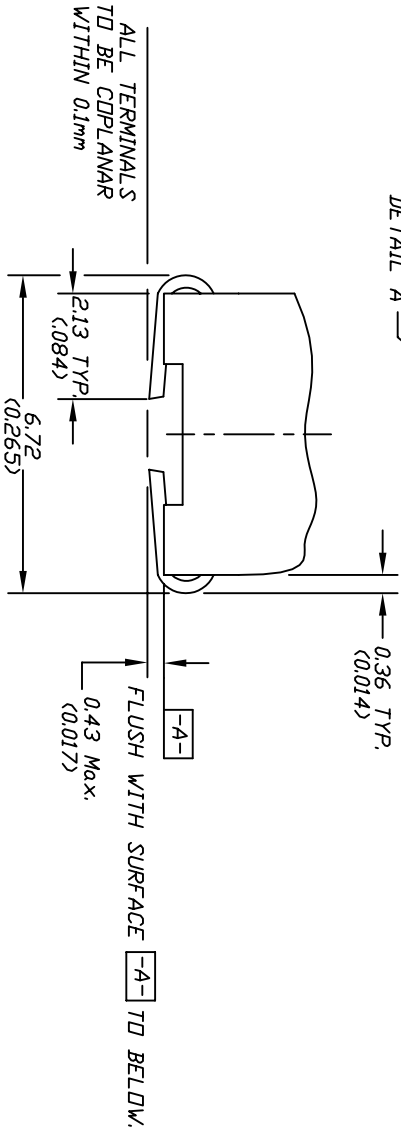
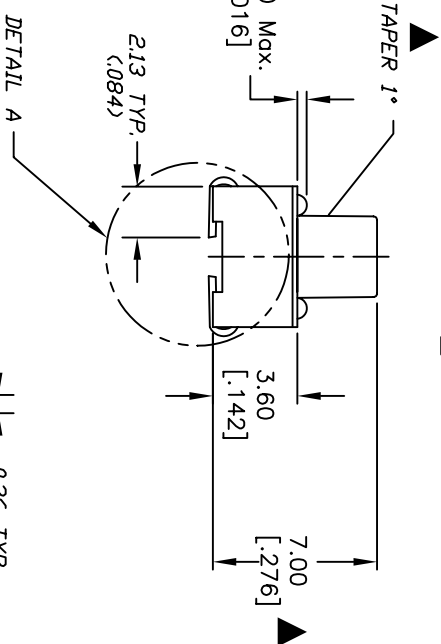


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 50mA, @12V DC
 5. BODY & STEM: LPC (E)
ACTUATOR COLOR: BLACK
BODY: BLACK (E)
 6. OPERATING FORCE: 160gf ±50grams
 7. TRAVEL: 0.25 +0.2/-0.1mm
 8. CONTACT RESISTANCE: 100 ohms max.
 9. PACKAGED: TAPE & REEL 700 PCS PER REEL
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. 2002/95/EC (ROHS) COMPLIANT
 12. REEL WIDTH: 16.0mm (D)

REV.	PCR No.	DESCRIPTION	DATE	CHKD
E	19511	FIXED NOTE: & DIMENSION	12/09/10	BGL
D	19360	ADDED REEL WIDTH	10/18/10	BMA
C	19024	FIXED TITLE (WAS F160GJ)	4/22/10	BLR
B	16876	FIXED ACTUATOR NOTE TO BLK	1/16/07	TN
A	13101	RELEASED FOR PRODUCTION	5/1/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

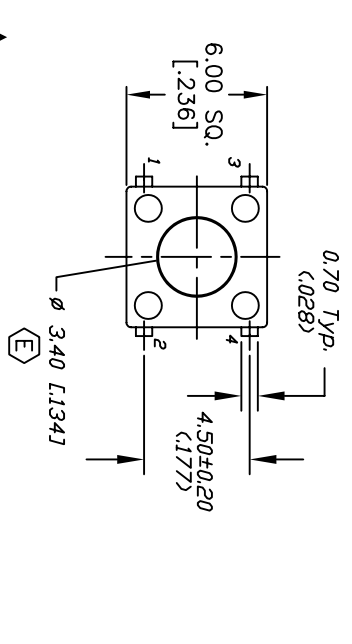

TITLE	SCALE	DATE	DR	DWG	REV
TL3301FF160QJ	3:1	4/22/2010	BLR	D310831	E

