

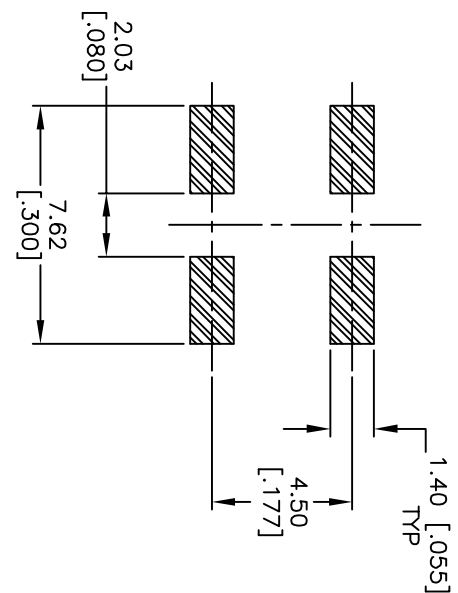
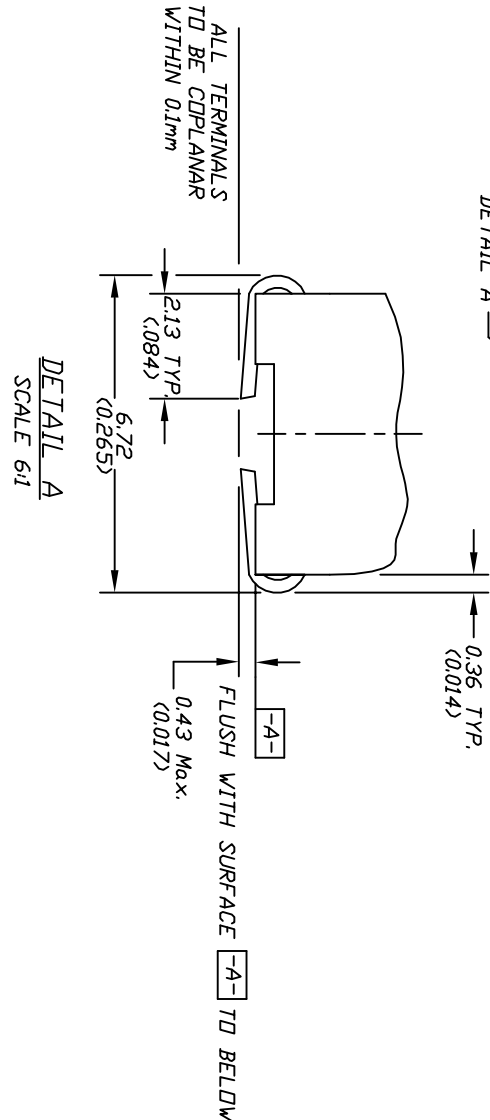
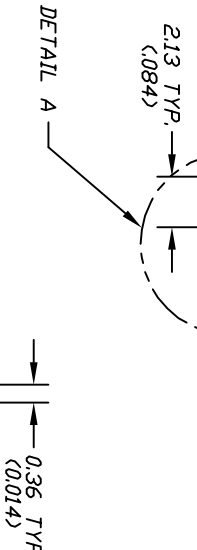
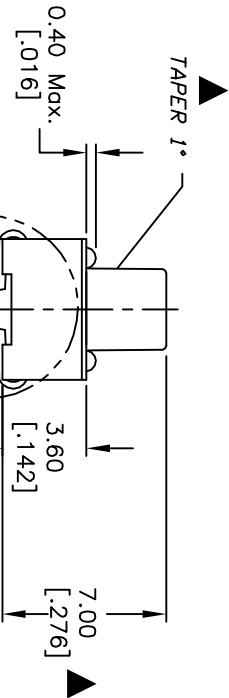


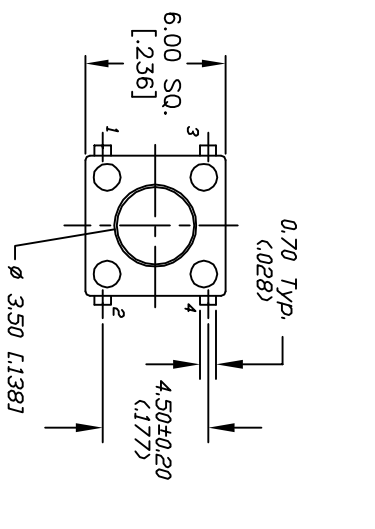

RECOMMENDED MOUNTING PAD
SCALE: 4:1

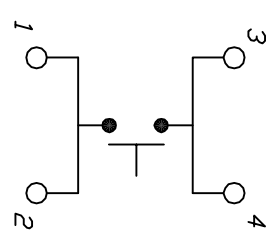

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
5. BODY & STEM: PPS RYTON R-4 ACTUATOR COLOR: WHITE (B) BODY: BROWN
6. OPERATING FORCE: 260gf +50/-30grams
7. TRAVEL: 0.25 +0.2/-0.1mm
8. CONTACT RESISTANCE: 100 ohms max.
9. PACKAGED: TAPE & REEL 700 PCS PER REEL (C)
10. ▲ DESIGNATE MAJOR FEATURE:
11. 2002/95/EC (RoHS) COMPLIANT.
12. REEL WIDTH: 16.0mm (C)

C	19360	MISC. NOT UPDATES	10/18/10	BMA	 E-SWITCH®  LAMB INDUSTRIES		
B	12914	CHANGE NOTE 5	3/14/03	AR			
A	12625	RELEASED	12/9/02	CB	TITLE TL 3301 F F260 Q J (Tape & Reel)		
REV.	ECN No.	DESCRIPTION	DATE	CHKD			
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR
					3:1	12/9/02	CB
							DWG
							D310832
							REV
							C