
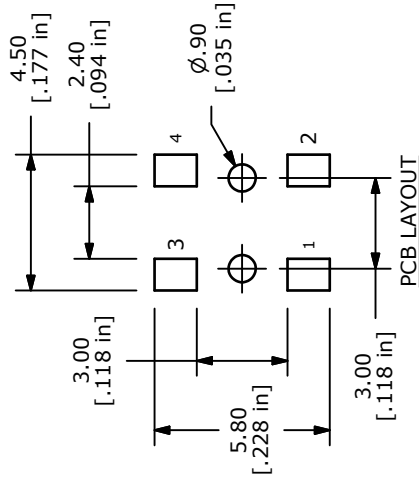
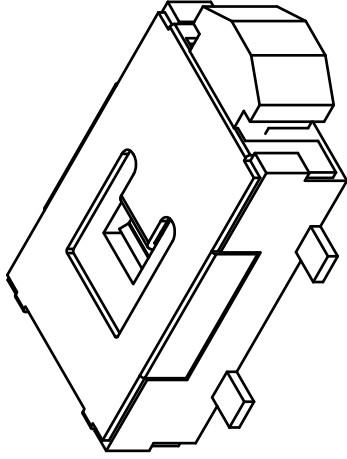
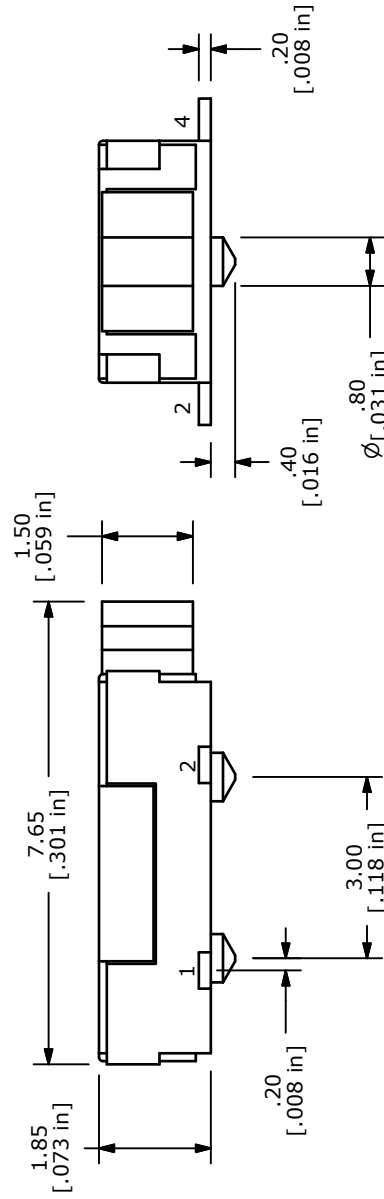


CIRCUIT DIAGRAM

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: $X, X = \pm 0.4$
 $X, XX = \pm 0.25$
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 12VDC, 50mA
 - ▲ 5. OPERATING FORCE: 180 ± 50 gms
 6. TRAVEL: $0.3\text{mm} \pm 0.1$
 7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
 8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
 - ▲ 9. PACKAGE: TAPE AND REEL - 2,000 PIECES PER REEL.
 10. ▲ DENOTES CRITICAL PARAMETER
 11. 2002/95/EC (ROHS) COMPLIANT

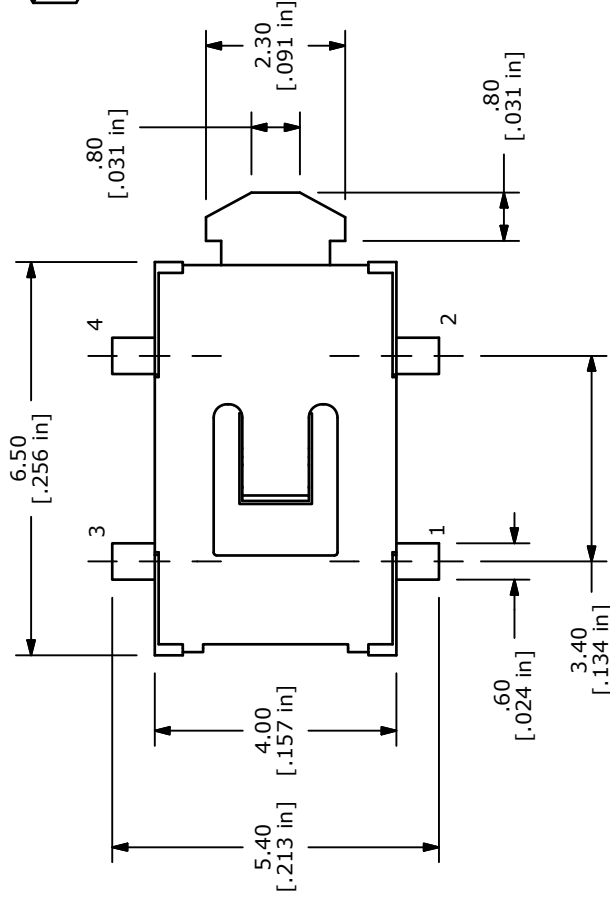

ISOMETRIC

C	19615	CHANGED MULTIPLE DIMENSIONS	1/24/11	BGL
B	14187	UPDATE FORCE, TRAVEL, TITLE	7/26/04	AR
A	11619	RELEASED FOR PRODUCTION	8/17/01	MM
REV	PCR NO	DESCRIPTION	DATE	BY
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED				
TITLE 901AGQF180				
SCALE 8:1		DATE 1/31/2007	DR TN	DWG D310960
				REV C