


RECOMMENDED P.C.B. LAYOUT

SCALE 3:1

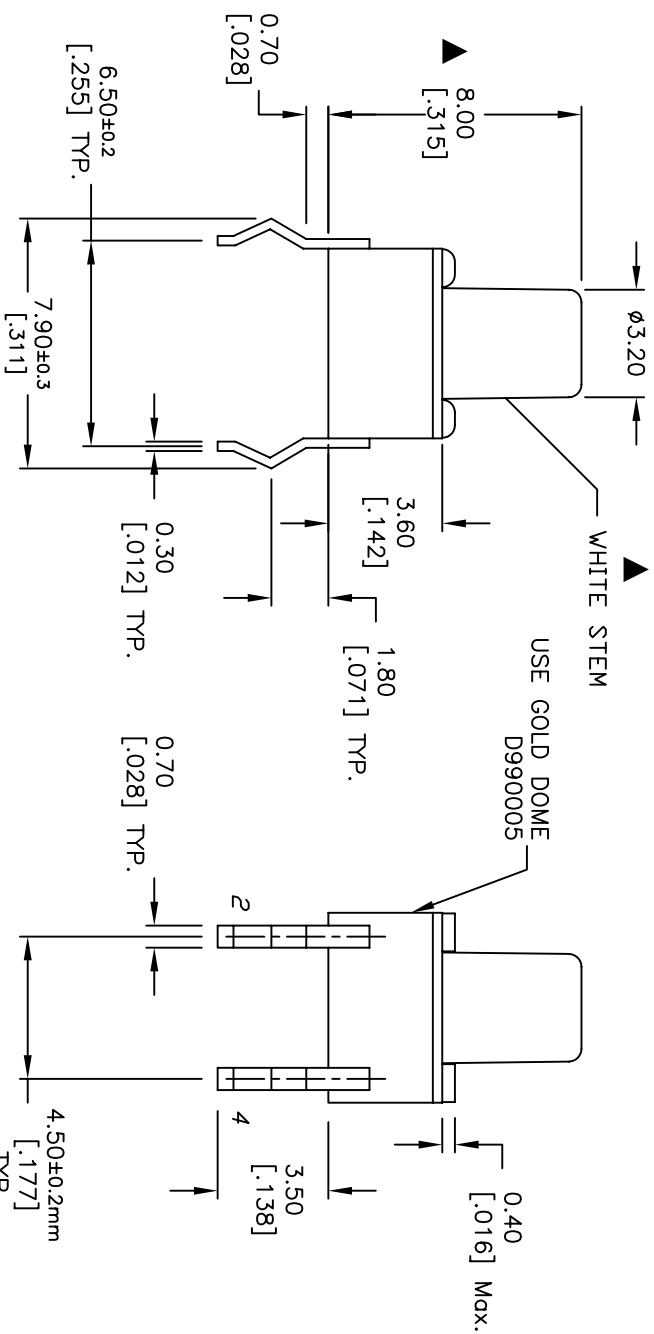

NOTES:

CIRCUIT: SPST

1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATINGS: 12VDC, 50mA
- GOLD Contact (terminals)
- ▲ 5. OPERATING FORCE: 160±50gf
 6. TRAVEL: 0.25±0.1mm
 7. CONTACT RESISTANCE: 100 mΩ—Ohms Max.
 8. DIELECTRIC STRENGTH: 250V RMS min.
 9. INSULATION RESISTANCE: 1000 Mega—Ohms min.
 10. ELECTRICAL LIFE: 100,000 CYCLES min.
 - ▲ 11. DESIGNATE MAJOR FEATURE:
 12. 2002/95/EC (ROHS) COMPLIANT

B	15470	GOLD DOME, RDHS INFO	10/28/05	PH
A	12193	RELEASED	5/30/02	CJB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®				
TITLE TL1105C F160 R (WHITE STEM)				
SCALE 4:1	DATE 5/30/02	DR CJB	DWG D330004	REV B