






RECOMMENDED P.C.B. LAND
SCALE: 4:1



CIRCUIT: SPST NORMALLY CLOSED
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TRAVEL; 0.4±0.15
- ▲ 4. RATING: DC12V, 50mA
5. OPERATING FORCE: 120±50gf
6. MECHANICAL LIFE; 50,000 cycles
7. CONTACT RESISTANCE; 100 milli-Ohms max. (INITIAL)
8. INSULATION RESISTANCE; 100 MEGA-Ohms
9. DIELECTRIC STRENGTH; 250V 50/60 HZ for 1 minute
10. OPERATING TEMP.; -20°C to +70°C
11. STORAGE TEMP.: -30°C to +80°C
12. BOUNCE; 10m SEC max.
13. MATERIALS;
HOUSING; ARLEN
STEM; SILICON RUBBER
FRAME; STAINLESS STEEL
TERMINALS; BRASS STRIP, SILVER PLATED
14. SWITCH TO BE SUPPLIED TAPE & REEL.
QTY. 3000 /REEL
15. ▲DENOTES CRITICAL PARAMETER.
16. 2002/95/EC (ROHS) COMPLIANT

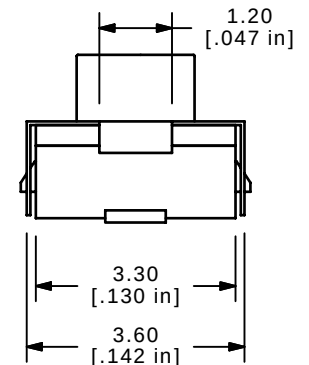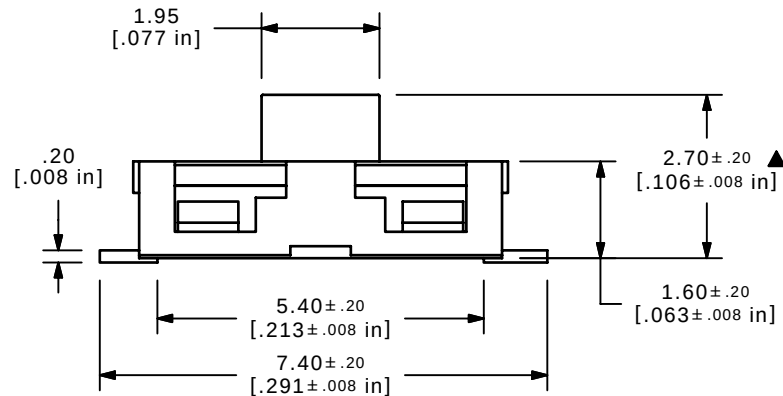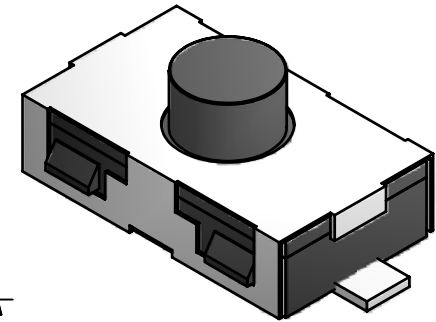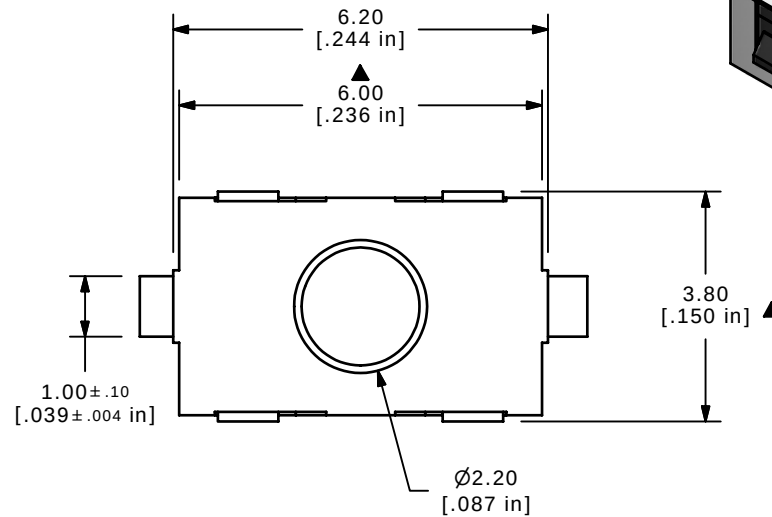

E-SWITCH™

E	19525	CONVERTED TO 3D MODEL	12/14/10	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL3310AF120QG

SCALE 8:1

DATE 12/13/2010

DR BGL

DWG D370000

REV E