


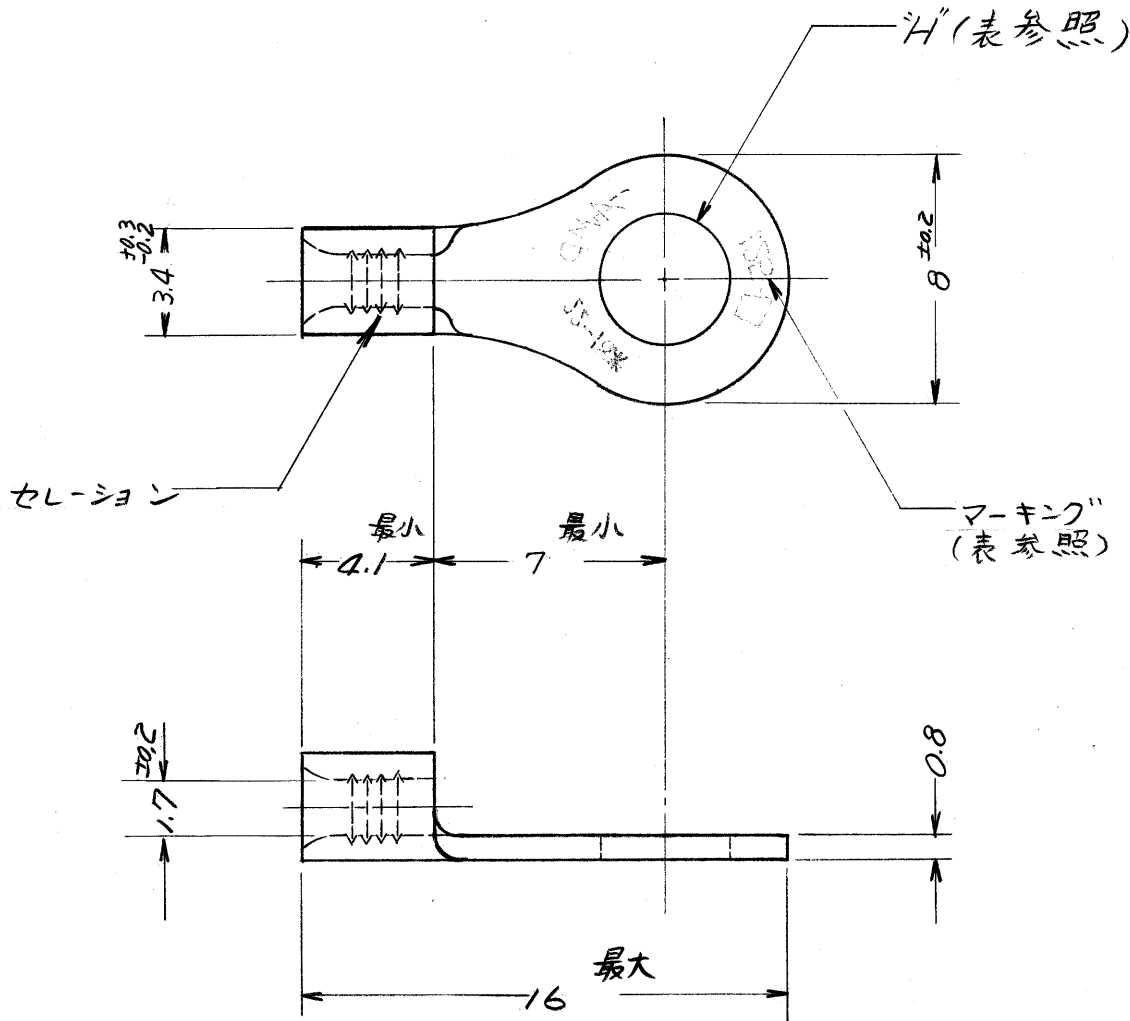

注: 1. UL規格製品として使用する場合は、電線サイズを AWG #22-18 (1.26~1.04 mm²) とする。

型 番	スタッド	"H" ±0.1 φ	マ-キング"
170721-1	4 MM	4.4	1.25-4
170721-2	5 MM	5.4	1.25-5

F	REVISED (P-DWG REV. B)	Y.K.	5/24/73	J. DELETE MARK (J84-7760)	2.5	4.3	1/16/84
E1	ADDED * MARK (P-DWG REV. A)	A.Y.	10/16/72	J. Revised J81-6162	MT	dk	1/21/82
E	REVISED (P-DWG REV. A)	A.Y.	5/2/72	H CHANGE WIRE # ADDED	H.S	ALV	3/11/75
D	REVISED (P-DWG REV. A)	T.A.	5/18/72	G REVISED (P-DWG REV. C)	A.S	ALV	7/1/75
C	ADD JIS 7-7 (P-DWG REV. A)	K.K.	8/23/71	©1975 BY AMP (Japan), Ltd. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING			
B	REVISED (P-DWG REV. A)	K.K.K.S.	7/10/70	参考図面 (CUSTOMER COPY) (REFERENCE ONLY)			
A	DELETE MARK * (P-DWG REV. 0)	K.K.	6/4/70	材料 (MATERIAL) 電気銅			
O	RELEASED (P-DWG REV. 0)	K.K.	3/13/70	仕上 (FINISH) 焼なまし、錫めっき			
LTR.	変更 (REVISION RECORD)	DR.	CHK.	DATE	抱合電線断面積 (WIRE RANGE) 0.25~1.65 mm ² (AWG)		
DR.	K. Kobayashi	DE.	3/15/70	被覆外径 (INSULATION DIA.) mm (IN) 4-1			
CHK.	K. Kobayashi	APP.	3/20/70	一般公差 (TOLERANCE EXCEPT AS NOTED) ±0.4			
				名称 (NAME) 丸型端子			