
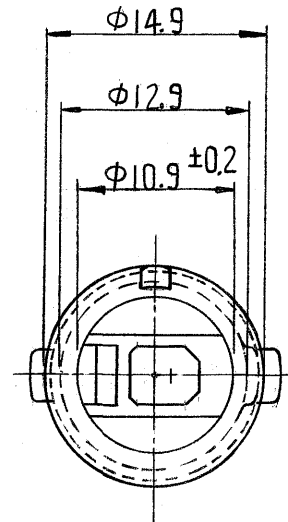
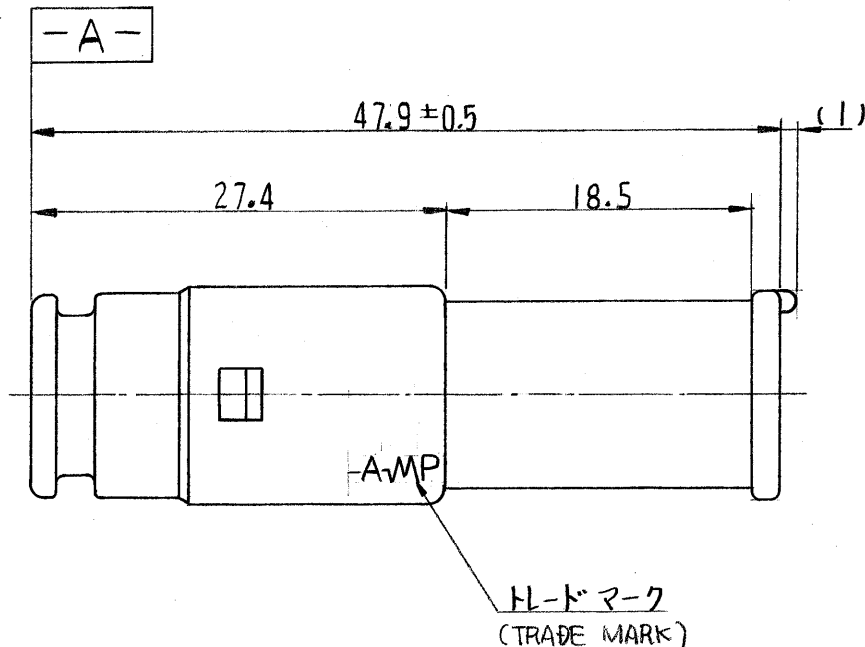


一般公差	
10以下	± 0.2
10を超え30以下	± 0.25
30を超え100以下	± 0.3
角 度	± 3°

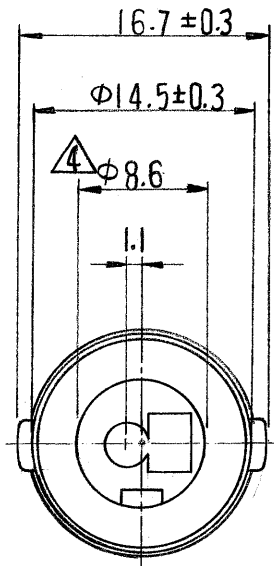

- 注;
1. 嵌合相手ハウジング型番 172195
 2. 使用端子型番 170279
 3. 型番 172195 と嵌合時に十分な所定の性能を満足する。
 - ④ **-A-** 面から 22mm の所で測定
 5. 商用製品規格番号 108-5136.

- NOTE:
1. THE MATING COUNTERPART PART NUMBER 172195
 2. APPLIED CONTACT: P/N 170279
 3. TO BE MATE WITE PLUG HOUSING (P/N 172195) SMOOTHLY
 - ④ TO BE MEASURED AT 22mm FROM **-A-**
 5. APPLICABLE PRODUCT SPEC. NUMBER 108-5136

172196-7	黄色 (YELLOW)
172196-6	濃灰 (DARK GRAY)
6-172196-6	淡灰 (LIGHT GRAY)
172196-4	緑 (GREEN)
2	黒 (BLACK)
172196-1	自然色 (NATURAL)

組立部品 (REQUIRED PER ASSEMBLY) 番号 (NUMBER) C-172196				番号 (NUMBER)		名称 (NAME)		番号 (P/N)		摘要 (REMARKS)		色 (COLOR)		ITEM NO.	
				Copyright ©1991年 AMP (Japan), LTD. ALL RIGHTS RESERVED.		Copyright ©1991 AMP (Japan), LTD. ALL RIGHTS RESERVED.		参考図面 (CUSTOMER COPY REFERENCE ONLY)		AMP		AMP (JAPAN), LTD. Tokyo, Japan			
				材料 (MATERIAL) 耐熱66ナイロン (HEAT RESISTING 66 NYLON)		被覆電線断面積 (WIRE RANGE) mm ² (AWG)		被覆外径 (INSULATION DIA.) mm (IN)		分類 (CLASS)		型式 (TYPE)			
				色: 表参照 (COLOR SEE TABLE)		公差 (TOLERANCE) ±0.4 EXCEPT AS NOTED		尺 (SCALE) 2-1		LOC		SIZE		番号 (NO)	
DR. <i>K. Yuzawa</i> 1/19/79 CHK. <i>A. Tomita</i> 1/24/79 DE. <i>M. Sato</i> 1/24/79 APP. <i>Y. Sato</i> 1/24/79				名称 (NAME)		1Pos ECONOSEAL SERIES "J" CONNECTOR CAP. HOUSING									
LTR. 変更 (REVISION RECORD)				DR. CHK. DATE				記 号 (DESCRIPTION)							

単位: 概 DIMENSIONS IN MM. DO NOT SCALE PRINT