

**Specification Status: RELEASED**

**Max Electrical Rating at 20°C**

**Operating Voltage: 250V<sub>DC</sub>**

**Interrupt Current: 3A<sub>RMS</sub>**


**Fault Voltage: 600V<sub>RMS</sub>**

Lead Material: Tin plated brass

Configuration: Two PPTC devices per  
TSM600 part

Case Material: Nylon Resin (UL94 V-0)  
1000V dielectric rating





**Marking:**



**Terminal Description:**

T1 = Tip In    T4 = Tip Out

R2 = Ring In    R3 = Ring Out

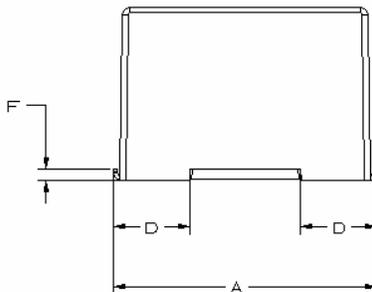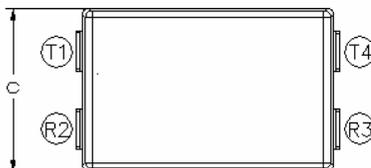

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F		G	
mm:	MIN	MAX												
in:	(0.671)	(0.691)	(0.440)	(0.460)	(0.410)	(0.440)	(0.187)	(0.203)	(0.099)	(0.111)	(0.022)	(0.038)	(0.087)	(0.122)

**TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):**

I HOLD (A)		RESISTANCE (Ω)** @ 20° C			TIME TO TRIP @ 3 A (Seconds)		OPERATING TEMPERATURE (°C)		Tripped state Power Dissipation @ 250V (Watts) TYPICAL
20°C	60°C	R MIN	R TYP	R <sub>1</sub> MAX*	TYP	MAX	MIN	MAX	
0.250	0.140	1.0	3.5	7.0	0.8	6	-40	85	2

\* Maximum device resistance, measured 1-hour post reflow or post trip.

\*\* Resistance per PPTC device.

**Additional Ratings @ 20°C**

Resistance Matched:	0.5 Ohm measured 24 hours after reflow installation	Storage Temperature:	-40° to 85° C
Line Balance:	0.5 Ohm, 59 dB @ 4 kHz minimum***	Storage Humidity:	Per IPC/JEDEC J-STD-020A Level 2a

\*\*\*Tested in accordance with IEEE 455 with a device having a series longitudinal balance value of at least 60dB

Agency Recognitions:	UL, CSA
Reference Documents:	PS300
Precedence:	This specification takes precedence over documents referenced herein.
Effectivity:	Reference documents shall be the issue in effect on the date of invitation for bid.

**MATERIALS INFORMATION**

**ROHS Compliant**

**ELV Compliant**

**Pb-Free**

Directive 2002/95/EC  
Compliant

Directive 2000/53/EC  
Compliant

