

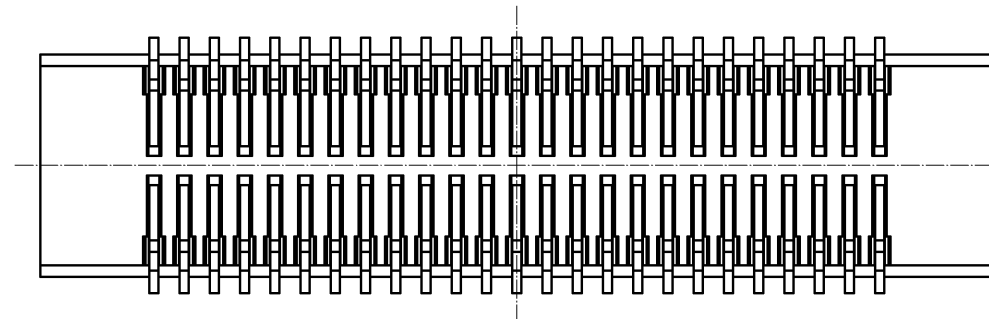
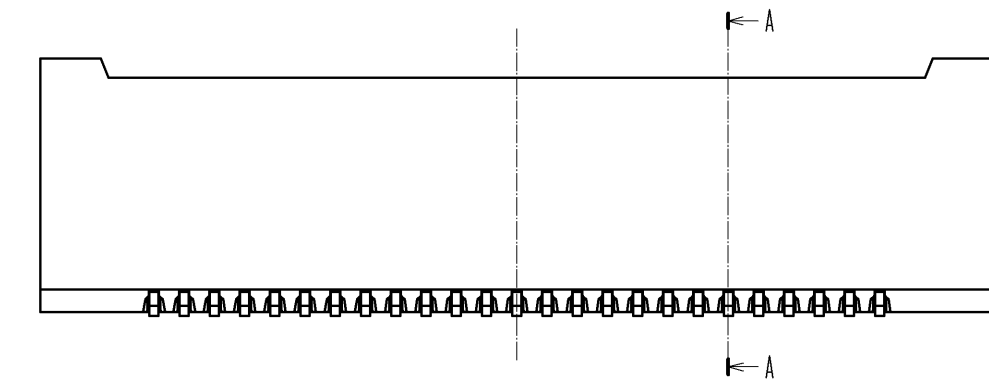



APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-35°C TO 85°C (NOTE 1)	STORAGE TEMPERATURE RANGE	-10°C TO 60°C	
	VOLTAGE	30V AC	APPLICABLE CONNECTOR	DF40*-50DP-0.4V (*)	
	CURRENT	0.3A			
SPECIFICATIONS					
ITEM		TEST METHOD	REQUIREMENTS	QT	AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	X	X
MARKING		CONFIRMED VISUALLY.		X	X
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE		20mV AC OR LESS 1kHz, 1mA .	90mΩ MAX.	X	—
INSULATION RESISTANCE		100V DC.	50MΩ MIN.	X	—
VOLTAGE PROOF		100V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	X	—
MECHANICAL CHARACTERISTICS					
MECHANICAL OPERATION		30TIMES INSERTIONS AND EXTRACTIONS.	① CONTACT RESISTANCE: 90mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—
VIBRATION		FREQUENCY 10 TO 55 TO 10 Hz, APPROX 5min, SINGLE AMPLITUDE 0.75 mm, 10CYCLES, FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—
SHOCK		490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—
ENVIRONMENTAL CHARACTERISTICS					
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -55→ 5 TO 35→85→ 5 TO 35 °C TIME 30→ 5 MAX → 30→ 5 MAX min UNDER 5 CYCLES.	① CONTACT RESISTANCE: 90mΩ MAX. ② INSULATION RESISTANCE: 50MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—
DAMP HEAT (STEADY STATE)		EXPOSED AT 40 ± 2 °C, 90 TO 95 %, 96 h.	① CONTACT RESISTANCE: 90mΩ MAX. ② INSULATION RESISTANCE: 25MΩ MIN. ③ NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—
SULPHUR DIOXIDE		EXPOSED IN 25 PPM FOR 96h, 25°C, 75%.	① CONTACT RESISTANCE: 180mΩ MAX. ② NO DAMAGE, CRACK OR LOOSENESS OF PARTS.	X	—
HEAT RESISTANCE OF SOLDERING		RECOMMENDED TEMPERATURE PROFILE SOLDERING AREA MAX 250°C, 220°C FOR 60 SECONDS MAX. PREHEATING AREA 150 TO 180°C 90 TO 120SECONDS. MAXIMUM TWICE ACTION IS ALLOWED UNDER THE SAME CONDITION. RECOMMENDED MANUAL SOLDERING CONDITION SOLDERING IRON TEMPERATURE 350°C. SOLDERING TIME: WITHIN 3 SECONDS.	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINALS.	X	—
SOLDERABILITY		SOLDERING TEMPERATURE: 245±5°C DURATION OF IMMERSION: SOLDERING FOR 3 SECONDS.	A NEW UNIFORM COATING OF SOLDER SHALL COVER MINIMUM OF 95% OF THE SURFACE BEING IMMERSED.	X	—
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
REMARKS			APPROVED	KH. IKEDA	09. 04. 27
NOTE1: INCLUDE THE TEMPERATURE RISING BY CURRENT			CHECKED	TS. MIYAZAKI	09. 04. 27
Unless otherwise specified, refer to JIS C 5402, IEC 60512.			DESIGNED	TK. SUZUKI	09. 04. 27
			DRAWN	TK. SUZUKI	09. 04. 27
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-318981-01
	SPECIFICATION SHEET		PART NO.	DF40HC (3. 5) -50DS-0. 4V (51)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL684-4109-4-51	1/1

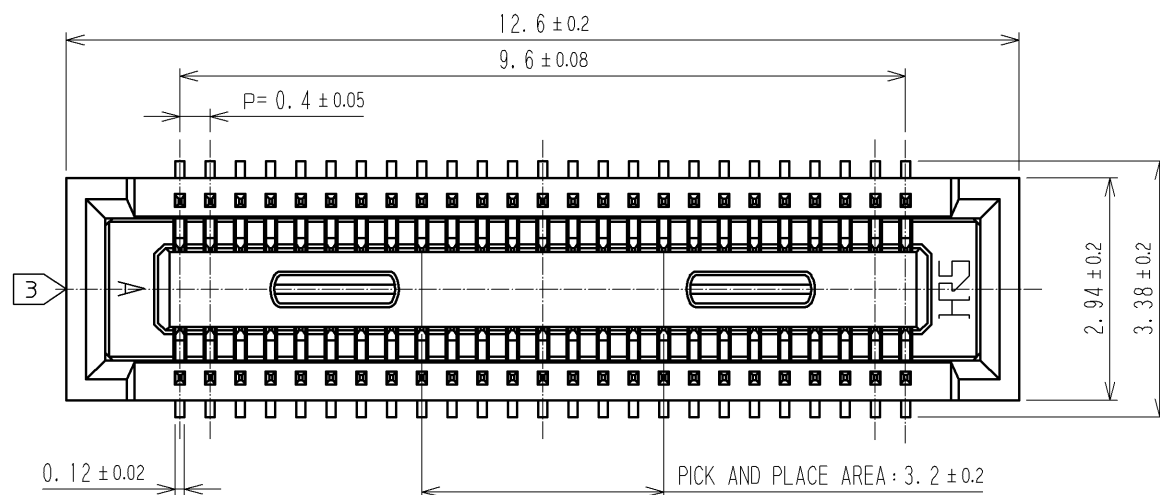

NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2 IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3 GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.


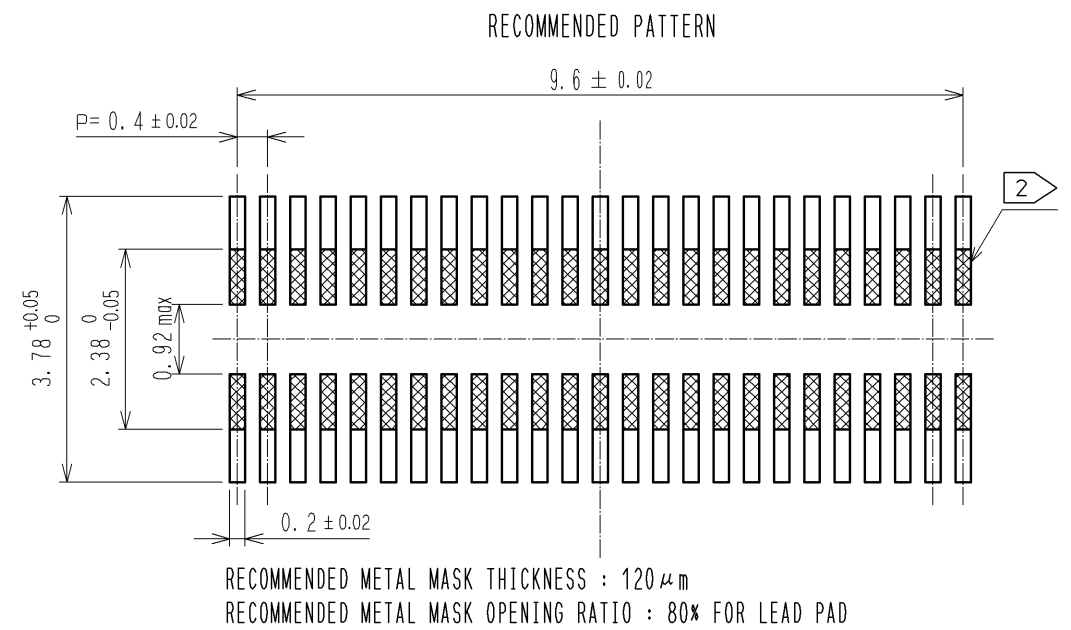


RECOMMENDED METAL MASK THICKNESS : $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD

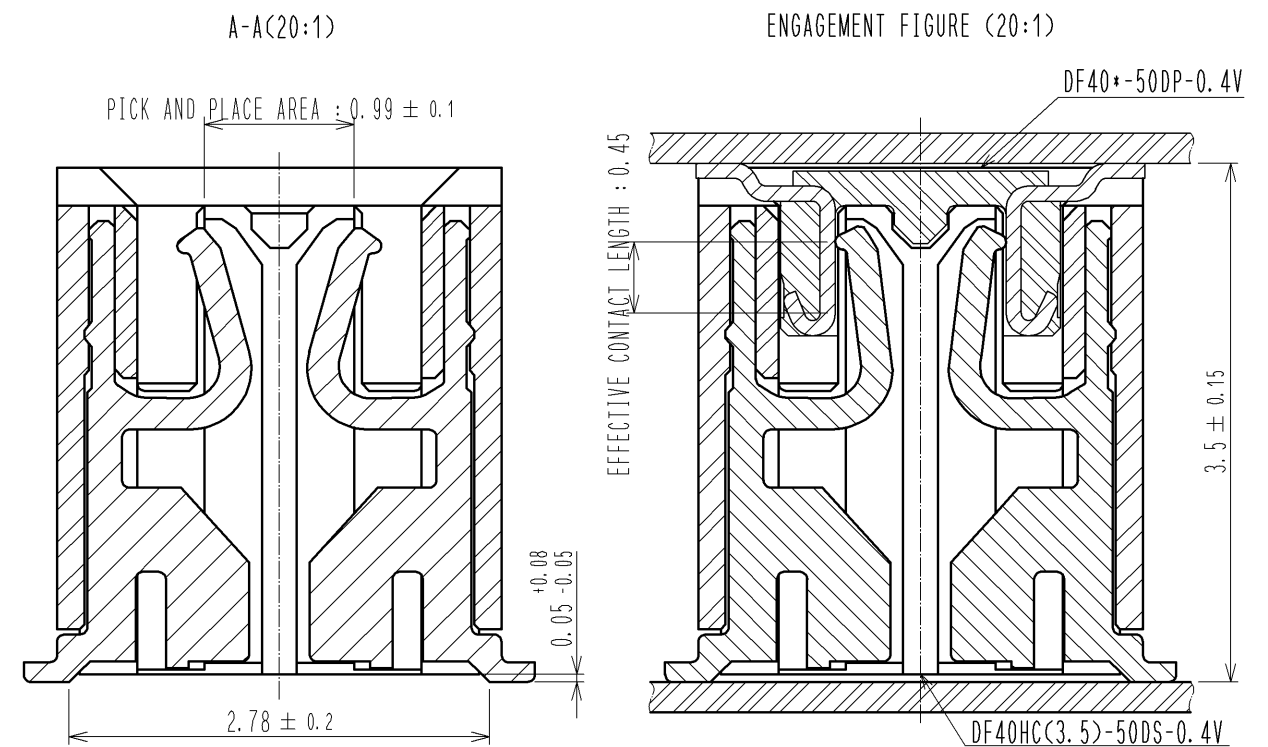


2	PHOSPHOR BRONZE	CONTACT AREA: GOLD $0.05 \mu\text{m}$ MIN	5	PS	BLACK
		SMT LEAD: GOLD $0.05 \mu\text{m}$ MIN	4	POLYESTER	CLEAR, COVER TAPE
		UNDERPLATING: NICKEL $1 \mu\text{m}$ MIN	3	PS	CLEAR, EMBOSSED CARRIER TAPE
1	LCP	BLACK, UL94V-0			
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm					
SCALE 10 : 1					
COUNT					
DESCRIPTION OF REVISIONS					
DESIGNED					
CHECKED					
DATE					
APPROVED : KH. IKEDA 09.04.27					
CHECKED : TS. MIYAZAKI 09.04.27					
DESIGNED : TK. SUZUKI 09.04.24					
DRAWN : TK. SUZUKI 09.04.24					
DRAWING NO. EDC3-318981-01					
PART NO. DF40HC(3.5)-50DS-0.4V(51)					
CODE NO. CL684-4109-4-51					
1/2					



SCALE (5:1)

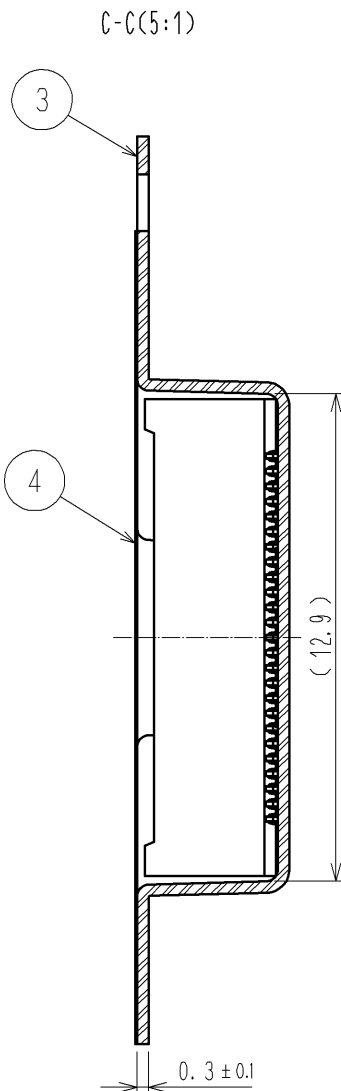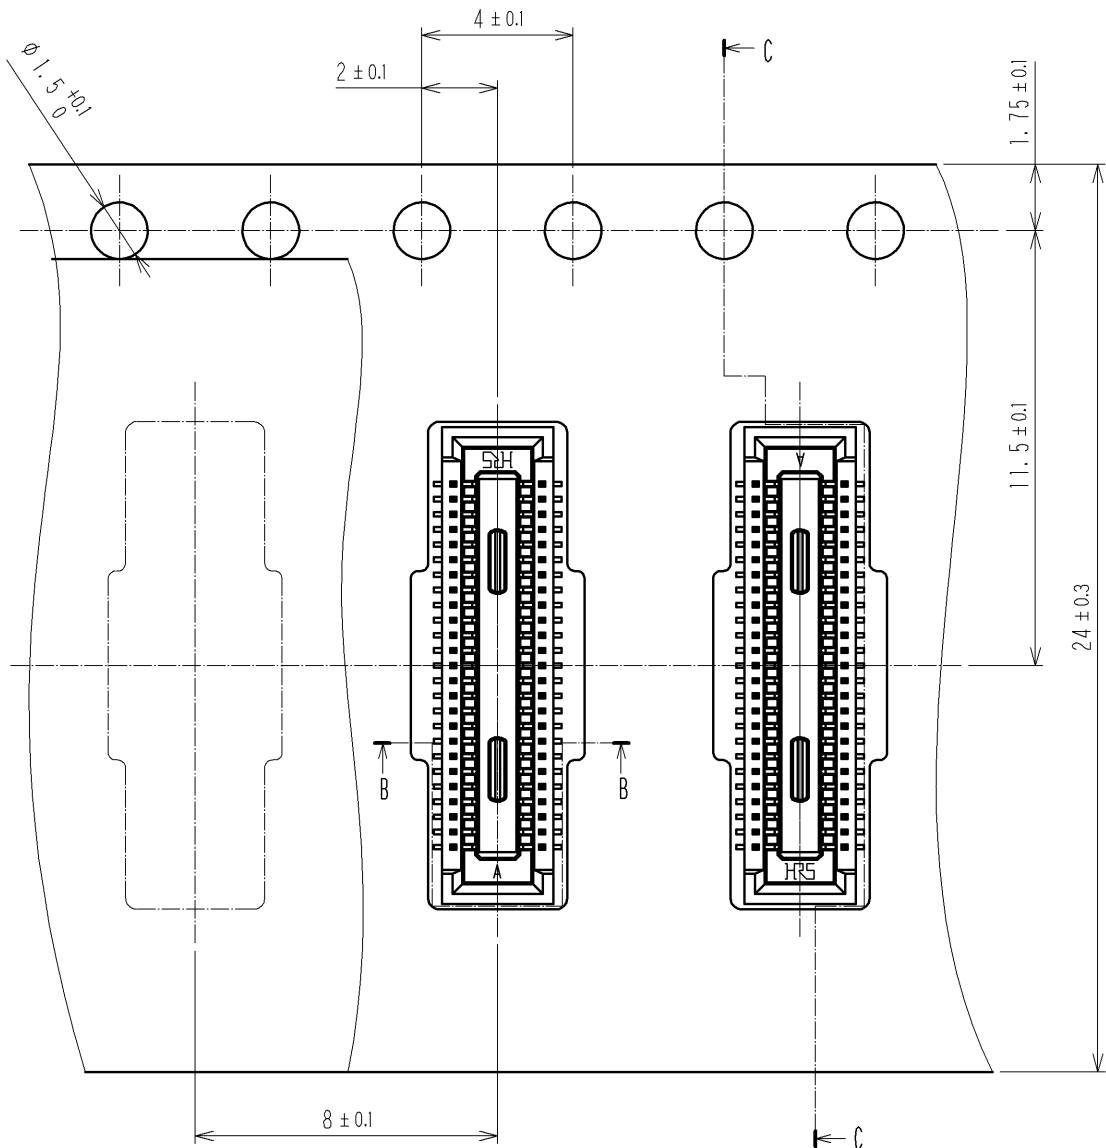

STYLE AND DIMENSION OF REEL (FREE SIZE)

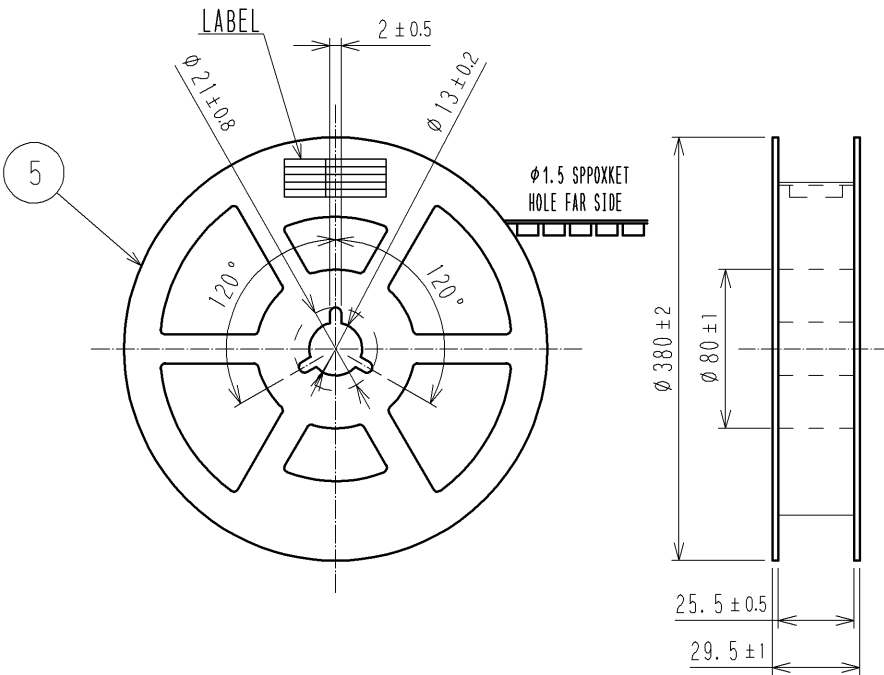

7>DETAIL OF PART NO. LABEL	
製造年月日	** ** *
製品コード	CL684-4109-4-51
製品名	DF40HC(3.5)-50DS-0.4V(51)
数量	2000
納入者	ヒロセ電機(株)

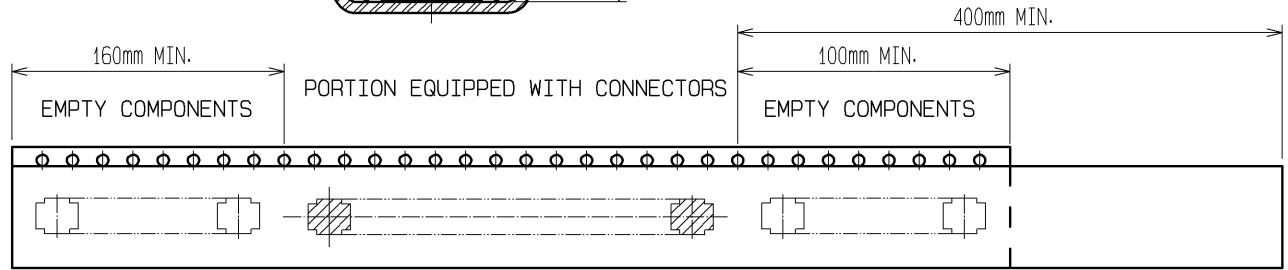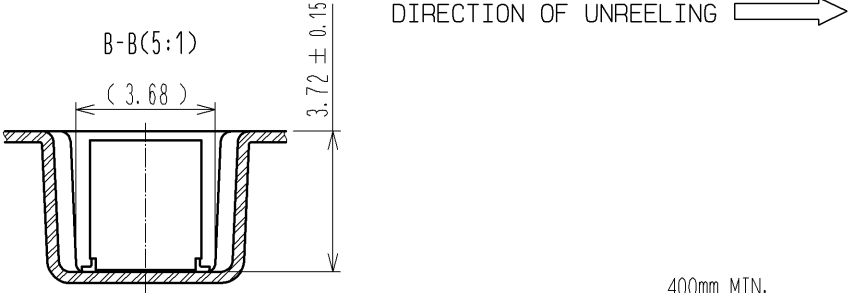

NOTES) 4. PER REEL 2000 CONNECTORS.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
6> REFER TO JIS C 0806(PACKING OF COMPONENTS FOR AUTOMATIC HANDOLING)
7> DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
PRODUCTION DATE:
PRODUCT CODE: CL684-4109-4-51
PART NUMBER: DF40HC(3.5)-50DS-0.4V(51)
NUMBER OF PIECES: 2000 PIECES
SUPPLIER NAME: HIROSE ELECTRIC CO., LTD.

HRS	DRAWING NO.	EDC3-318981-01
	PART NO.	DF40HC(3.5)-50DS-0.4V(51)
	CODE NO.	CL684-4109-4-51