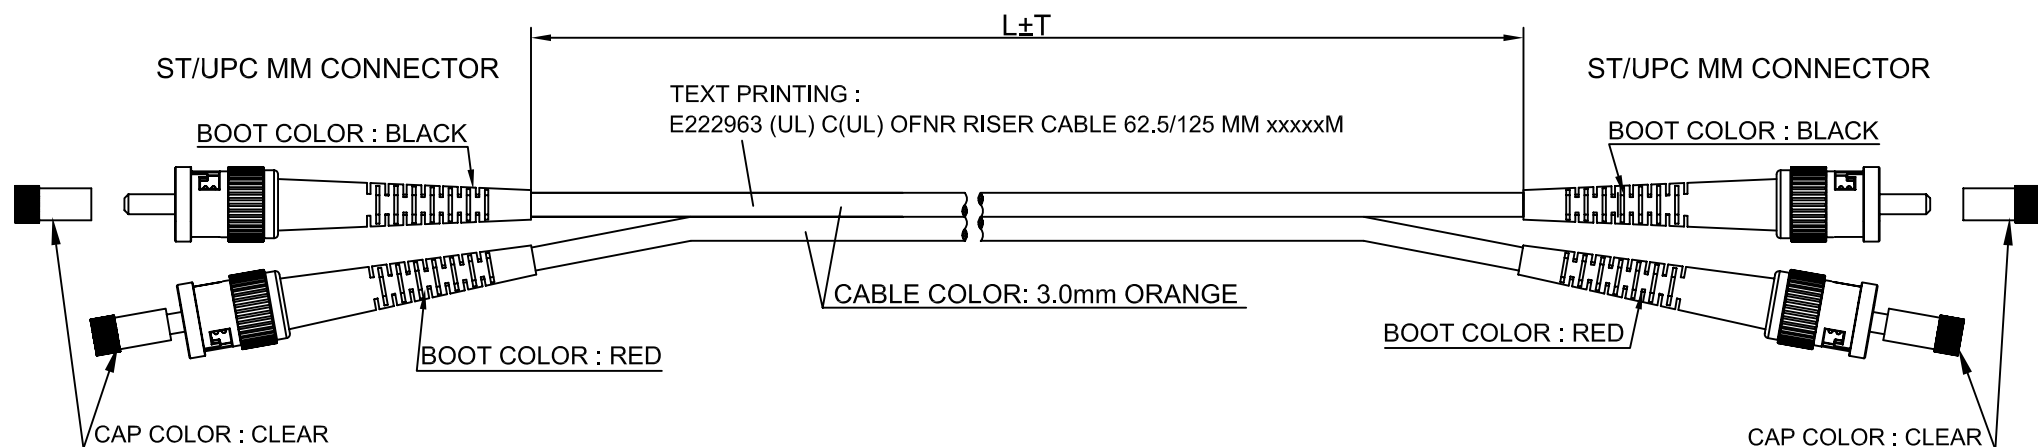


**DFMM-STST-XX**

xxM ST/ST MM 62.5/125, DUPLEX RISER

QTY. 1

[www.bb-elec.com](http://www.bb-elec.com)

DETAIL A

## NOTES:

1. INSERTION LOSS < 0.5dB.
2. OPERATION TEMP: -20°C TO +60°C
3. ORANGE PVC OUTER JACKET
4. INDIVIDUALLY BAGGED AND LABELED, (SEE DETAIL A)

## CHART

| DFMM-STST-10M | 10 | 32.8'(10000) | +2"/-0(+50/-0) |         |
|---------------|----|--------------|----------------|---------|
| DFMM-STST-5M  | 5  | 16.4'(5000)  | +2"/-0(+50/-0) |         |
| DFMM-STST-3M  | 3  | 9.84'(3000)  | +2"/-0(+50/-0) |         |
| DFMM-STST-2M  | 2  | 6.56'(2000)  | +2"/-0(+50/-0) |         |
| DFMM-STST-1M  | 1  | 3.28'(1000)  | +2"/-0(+50/-0) |         |
| PART NO.      | XX | L            | T              | BARCODE |

**B&B Electronics manufacturing Co.**

|             |                       |                                                                     |           |
|-------------|-----------------------|---------------------------------------------------------------------|-----------|
|             | UNIT:<br>Inches[mm]   | TITLE:<br>xxM DUPLEX 62.5/125 MULTIMODE<br>ST/ST RISER JUMPER CABLE |           |
|             | DRAWN BY<br>A. MEDINA | DATE<br>05/09/2008                                                  |           |
| CHECKED BY  | DATE                  | DRAWING NO.<br>C.D. 2379                                            | REV.<br>A |
| APPROVED BY | DATE                  | REF:                                                                |           |
| P.O. NO.:   | DATE                  | PART NO.<br>DFMM-STST-XX                                            |           |