

P2

50FT±3%


P1

PIN OUT

P1	568B Color	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8

A cross-sectional diagram of a 6.0mm cable. The outermost layer is labeled 'Jacket'. Inside the jacket is a layer of 'Bare Copper'. The innermost layer is labeled 'Insulation'. The diagram shows four individual conductors, each consisting of a central bare copper core surrounded by an insulation layer. The conductors are numbered 1, 2, 3, and 4. A dimension line indicates the overall diameter of the cable is 6.0mm.

1	2	3	4
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN

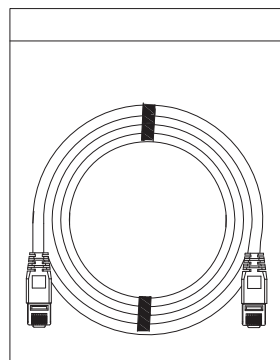

25 cables per carton

Material:

- 4x2, 24AWG, twisted pair, 7*0.19±0.15MM
- OD: 6.0MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50μ”
- 568B Color wire standard
- Molded snagless boot with strain relief
- Spot length on boot
- Connection: 1:1

Scale	1:1							Name
TOLERANCE						Drawn	12.08.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	Item Description	Unit	Quantity	Unit Price	Total Price
----------	------------------	------	----------	------------	-------------

DK-1611-050/G

	Title
--	-------

Cat6 Patch Cord - Unshielded, Booted, 50 Feet,
UTP, 24AWG, Contact Plating 50µ" of Gold, Grey

Drawing No.

rev00

Replace

Sheet

RoHS Complaint

ASSMANN
WVSVV components