


P2


Diagram of a 100-foot Ethernet cable with RJ45 connectors. The cable is labeled "100 FT" on both connectors. A dimension line above the cable indicates a length of "100FT±3%". Callout "8" points to the RJ45 port, and callout "1" points to the RJ45 jack. A "PIN OUT" label is positioned below the cable.

P1

PIN OUT		
P1	568B Color	P2
1	White/Orange	1
2	Orange	2
3	White/Green	3
4	Blue	4
5	White/Blue	5
6	Green	6
7	White/Brown	7
8	Brown	8

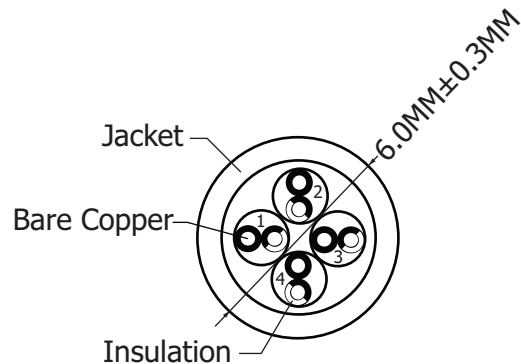

1	2	3	4
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN

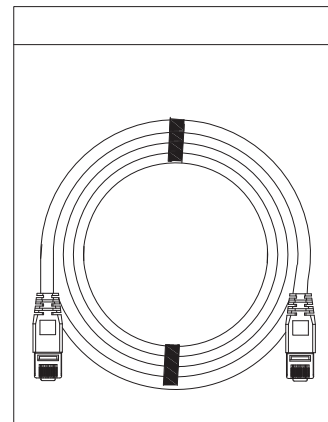

12 cables per carton

Material:

- 4X2, 24AWG, twisted pair, 7*0.19±0.15MM
- OD: 6.0MM±0.30MM
- Insulation: HDPE-8380
- Jacket: PVC
- Contact Plug: UTP RJ45, 50μ”
- 568B Color wire standard
- Molded snagless boot with strain relief
- Spot length on boot
- Connection: 1:1

Scale	1:1							Name
TOLERANCE						Drawn	12.12.11	Chappell
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

Item No.	
----------	--

DK-1611-100/B

Title	Cat6 Patch Cord - Unshielded, Booted, 100 Feet, UTP, 24AWG, Contact Plating 50μ" of Gold, Blue
--------------	--

Drawing No.

rev00

Replace

Sheet

