
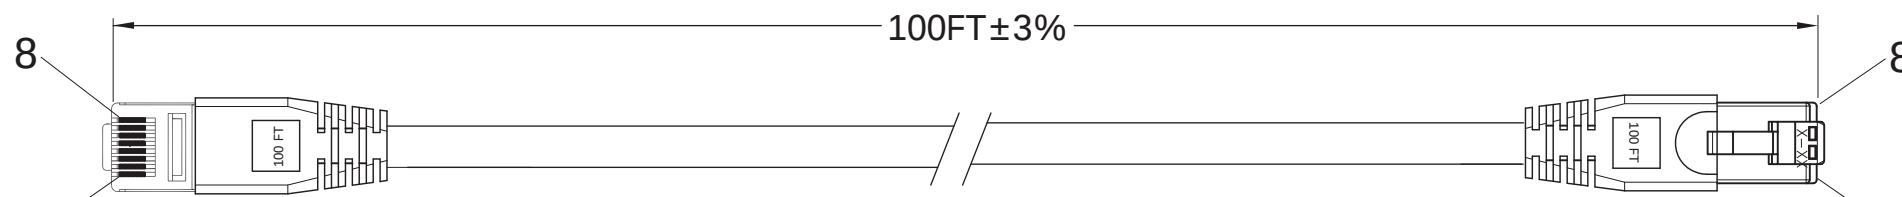

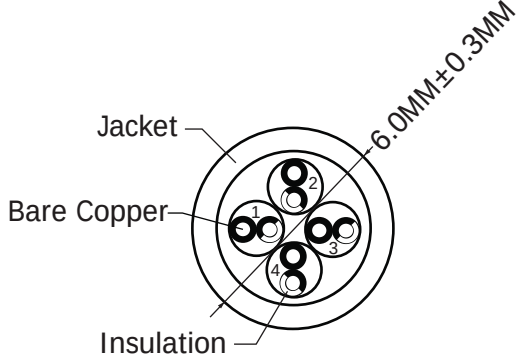


	1	2	3	4	5	6	7																													
A	P2 								A																											
B	P1								B																											
C	<table border="1" style="font-size: 0.8em;"> <caption>PIN OUT</caption> <thead> <tr> <th>P1</th> <th>568B Color</th> <th>P2</th> </tr> </thead> <tbody> <tr><td>1</td><td>White/Orange</td><td>1</td></tr> <tr><td>2</td><td>Orange</td><td>2</td></tr> <tr><td>3</td><td>White/Green</td><td>3</td></tr> <tr><td>4</td><td>Blue</td><td>4</td></tr> <tr><td>5</td><td>White/Blue</td><td>5</td></tr> <tr><td>6</td><td>Green</td><td>6</td></tr> <tr><td>7</td><td>White/Brown</td><td>7</td></tr> <tr><td>8</td><td>Brown</td><td>8</td></tr> </tbody> </table> 								P1	568B Color	P2	1	White/Orange	1	2	Orange	2	3	White/Green	3	4	Blue	4	5	White/Blue	5	6	Green	6	7	White/Brown	7	8	Brown	8	C
P1	568B Color	P2																																		
1	White/Orange	1																																		
2	Orange	2																																		
3	White/Green	3																																		
4	Blue	4																																		
5	White/Blue	5																																		
6	Green	6																																		
7	White/Brown	7																																		
8	Brown	8																																		
D	  12 cables per carton Material: • 4X2, 24AWG, twisted pair, 7*0.19±0.15MM - OD: 6.0MM±0.30MM • Insulation: HDPE-8380 • Jacket: PVC • Contact Plug: UTP RJ45, 50μ" • 568B Color wire standard • Molded snagless boot with strain relief • Spot length on boot • Connection: 1:1								D																											
E	<table border="1" style="width: 100%; text-align: center; font-size: 0.7em;"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>BLU WH/BLU</td> <td>ORG WH/ORG</td> <td>GRN WH/GRN</td> <td>BWN WH/BWN</td> </tr> </table>								1	2	3	4	BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN	E																			
1	2	3	4																																	
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN																																	
F	<table border="1" style="width: 100%; text-align: center; font-size: 0.7em;"> <tr> <td>1</td> <td>2</td> <td>3</td> <td>4</td> </tr> <tr> <td>BLU WH/BLU</td> <td>ORG WH/ORG</td> <td>GRN WH/GRN</td> <td>BWN WH/BWN</td> </tr> </table>								1	2	3	4	BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN	F																			
1	2	3	4																																	
BLU WH/BLU	ORG WH/ORG	GRN WH/GRN	BWN WH/BWN																																	
G	Unit: mm		<table border="1" style="font-size: 0.7em;"> <tr> <td>Scale</td> <td>Free</td> </tr> <tr> <td colspan="2">TOLERANCE</td> </tr> <tr> <td>X.</td> <td>±0.3</td> </tr> <tr> <td>X.X</td> <td>±X</td> </tr> <tr> <td>X.XX</td> <td>±X</td> </tr> <tr> <td>DIM</td> <td>TOL</td> </tr> <tr> <td>X.°</td> <td>±X°</td> </tr> <tr> <td>X.X°</td> <td>±X°</td> </tr> <tr> <td>Angle</td> <td>TOL</td> </tr> </table>		Scale	Free	TOLERANCE		X.	±0.3	X.X	±X	X.XX	±X	DIM	TOL	X.°	±X°	X.X°	±X°	Angle	TOL	<table border="1" style="font-size: 0.7em;"> <tr> <td>Date</td> <td>Name</td> <td rowspan="3"> Cat6 UTP Patch cable Unshielded, Booted, White, 100ft </td> </tr> <tr> <td>Drawn</td> <td>12.12.11</td> <td>Chappell</td> </tr> <tr> <td>Approved</td> <td></td> <td></td> </tr> </table>		Date	Name	Cat6 UTP Patch cable Unshielded, Booted, White, 100ft	Drawn	12.12.11	Chappell	Approved			G		
Scale	Free																																			
TOLERANCE																																				
X.	±0.3																																			
X.X	±X																																			
X.XX	±X																																			
DIM	TOL																																			
X.°	±X°																																			
X.X°	±X°																																			
Angle	TOL																																			
Date	Name	Cat6 UTP Patch cable Unshielded, Booted, White, 100ft																																		
Drawn	12.12.11		Chappell																																	
Approved																																				
H	RoHS Compliant		<table border="1" style="font-size: 0.7em;"> <tr> <td colspan="2">ASSMANN WSW-No.</td> <td rowspan="2" style="text-align: center; vertical-align: middle;">rev00</td> </tr> <tr> <td colspan="2" style="text-align: center;">DK-1611-100/WH</td> </tr> <tr> <td colspan="2">Drawing-No.</td> <td rowspan="2" style="text-align: center; vertical-align: middle;">Sheet 1/1</td> </tr> <tr> <td colspan="2">Replace</td> </tr> </table>		ASSMANN WSW-No.		rev00	DK-1611-100/WH		Drawing-No.		Sheet 1/1	Replace		H																					
ASSMANN WSW-No.		rev00																																		
DK-1611-100/WH																																				
Drawing-No.		Sheet 1/1																																		
Replace																																				
	1	2	3	4	5	6	7																													

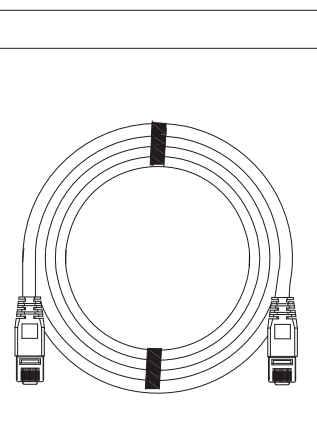