

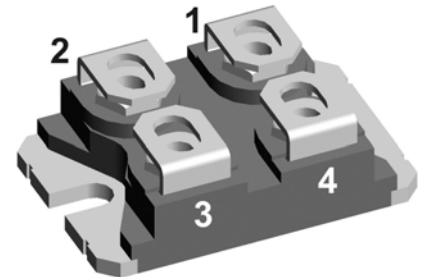
Schottky Diode Gen ²

preliminary

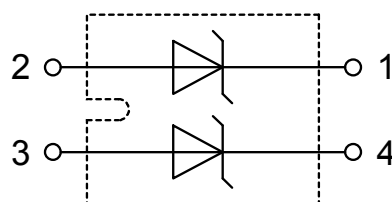
$$\begin{aligned} V_{RRM} &= 150V \\ I_{FAV} &= 2 \times 120A \\ V_F &= 0.85V \end{aligned}$$

High Performance Schottky Diode
Low Loss and Soft Recovery
Parallel legs

Part number

DSA240X150NA


Backside: isolated

Features / Advantages:

- Very low V_f
- Extremely low switching losses
- Low I_{rm} values
- Improved thermal behaviour
- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching

Applications:

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Package: SOT-227B (minibloc)

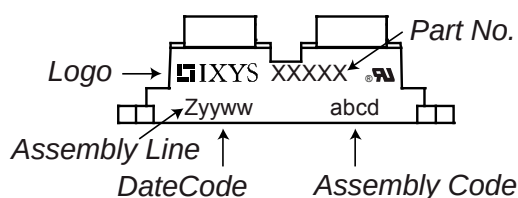
- Isolation Voltage: 3000 V~
- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0
- Base plate: Copper internally DCB isolated
- Advanced power cycling

Schottky				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				150	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^{\circ}\text{C}$				150	V
I_R	reverse current, drain current	$V_R = 150\text{ V}$	$T_{VJ} = 25^{\circ}\text{C}$			1.5	mA
		$V_R = 150\text{ V}$	$T_{VJ} = 125^{\circ}\text{C}$			15	mA
V_F	forward voltage drop	$I_F = 120\text{ A}$	$T_{VJ} = 25^{\circ}\text{C}$			0.98	V
		$I_F = 240\text{ A}$				1.24	V
		$I_F = 120\text{ A}$	$T_{VJ} = 125^{\circ}\text{C}$			0.85	V
		$I_F = 240\text{ A}$				1.15	V
I_{FAV}	average forward current	$T_C = 95^{\circ}\text{C}$	$T_{VJ} = 150^{\circ}\text{C}$			120	A
		rectangular $d = 0.5$					
V_{F0}	threshold voltage	} for power loss calculation only		$T_{VJ} = 150^{\circ}\text{C}$		0.51	V
r_F	slope resistance					2.5	mΩ
R_{thJC}	thermal resistance junction to case					0.4	K/W
R_{thCH}	thermal resistance case to heatsink				0.10		K/W
P_{tot}	total power dissipation	$T_C = 25^{\circ}\text{C}$				310	W
I_{FSM}	max. forward surge current	$t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}; V_R = 0\text{ V}$	$T_{VJ} = 45^{\circ}\text{C}$			1.60	kA
C_J	junction capacitance	$V_R = 24\text{ V}$ $f = 1\text{ MHz}$	$T_{VJ} = 25^{\circ}\text{C}$		902		pF

preliminary

Package SOT-227B (minibloc)				Ratings			
Symbol	Definition	Conditions		min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal				150	A
T_{VJ}	virtual junction temperature			-40		150	°C
T_{op}	operation temperature			-40		125	°C
T_{stg}	storage temperature			-40		150	°C
Weight					30		g
M_D	mounting torque			1.1		1.5	Nm
M_T	terminal torque			1.1		1.5	Nm
$d_{Spp/App}$	creepage distance on surface striking distance through air	terminal to terminal	10.5	3.2			mm
$d_{Spb/Apb}$		terminal to backside	8.6	6.8			mm
V_{ISOL}	isolation voltage	t = 1 second	50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	3000			V
		t = 1 minute		2500			V

Product Marking



Part number


D = Diode
 S = Schottky Diode
 A = low VF
 240 = Current Rating [A]
 X = Parallel legs
 150 = Reverse Voltage [V]
 NA = SOT-227B (minibloc)

Ordering	Part Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DSA240X150NA	DSA240X150NA	Tube	10	511101

Similar Part	Package	Voltage class
DSS2x101-015A	SOT-227B (minibloc)	150

Equivalent Circuits for Simulation

* on die level

 $T_{VJ} = 150^\circ\text{C}$ 

Schottky

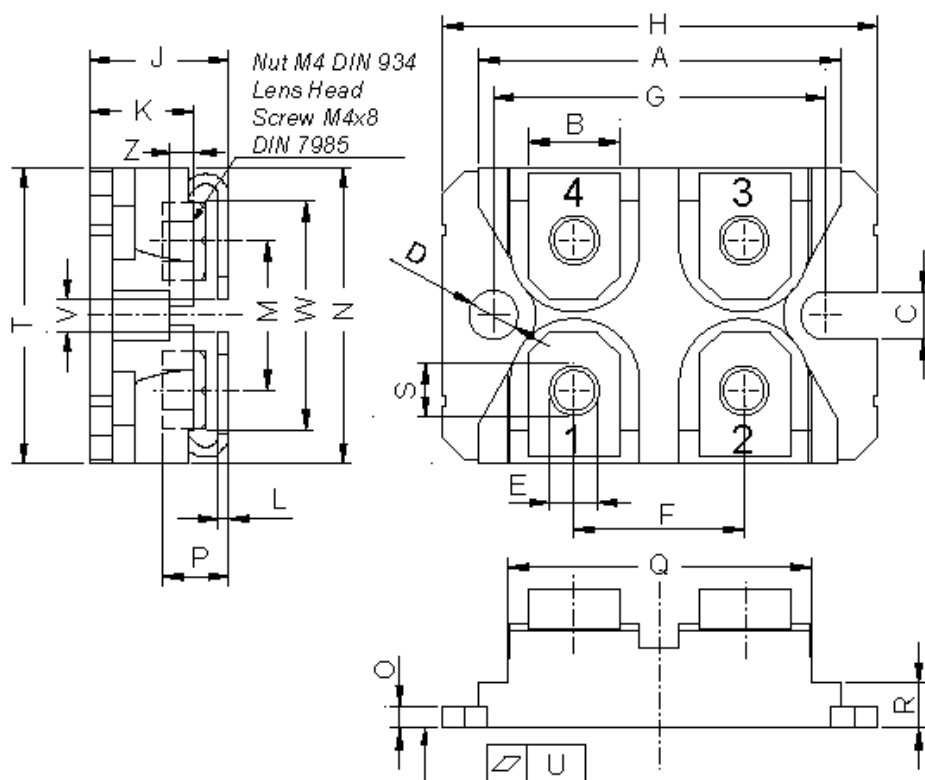
 $V_{0\max}$ threshold voltage 0.51

V

 $R_{0\max}$ slope resistance * 0.6

mΩ

Outlines SOT-227B (minibloc)



Dim.	Millimeter		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.167
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

