

MICRO SWITCH

FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
DTE6-2RQ62

DTE6-2RQ62

DRAWING
NUMBER

ISSUE

11

REPLACES

SR8869

10 NOV 05

RJ

CHECK

REVISIONS

A	C053799	J A P	31 AUG 83
B	53191-D	K J S	1 MAR 84
C	C054958	TSK	26 FEB 85
D	C072661	DAW	8 SEP 92
E	C077889	KEU	20 SEP 94
F	0016894	KRB	10 NOV 05

30 AUG 83

CHECK


DRAWN

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ----- 5-12 OZ	CONTACT ARRANGEMENT D P D T
PRETRAVEL ----- 1.100 MAX	10A-125 OR 250 VAC
DIFFERENTIAL TRAVEL ----- .560 MAX	CODE L59 0.3A-125 VDC; 0.15A-250 VDC
OVERTRAVEL ----- .838 MIN	
SWITCH-BASIC REPLACEMENT-- DT-2R-47	

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ----- 5-12 OZ	CONTACT ARRANGEMENT D P D T
PRETRAVEL ----- 1.100 MAX	10A-125 OR 250 VAC
DIFFERENTIAL TRAVEL ----- .560 MAX	CODE L59 0.3A-125 VDC; 0.15A-250 VDC
OVERTRAVEL ----- .838 MIN	
SWITCH-BASIC REPLACEMENT-- DT-2R-47	

SCALE FULL
DO NOT SCALE PRINT
TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE:
DIM. TOL. DIM. TOL.
mm mm/in in mm/in
NO PLACES X 1/04
ONE PLACE X,X 0.4/016 X,X 0.8/03
TWO PLACES X,X,X 0.15/006 X,X,X 0.38/015
THREE PLACES X,X,X,X 0.13/003
ANGLES
SI METRIC US CUSTOMARY
DESIGN UNITS
THIRD ANGLE PROJECTION
WEIGHT .71 LB

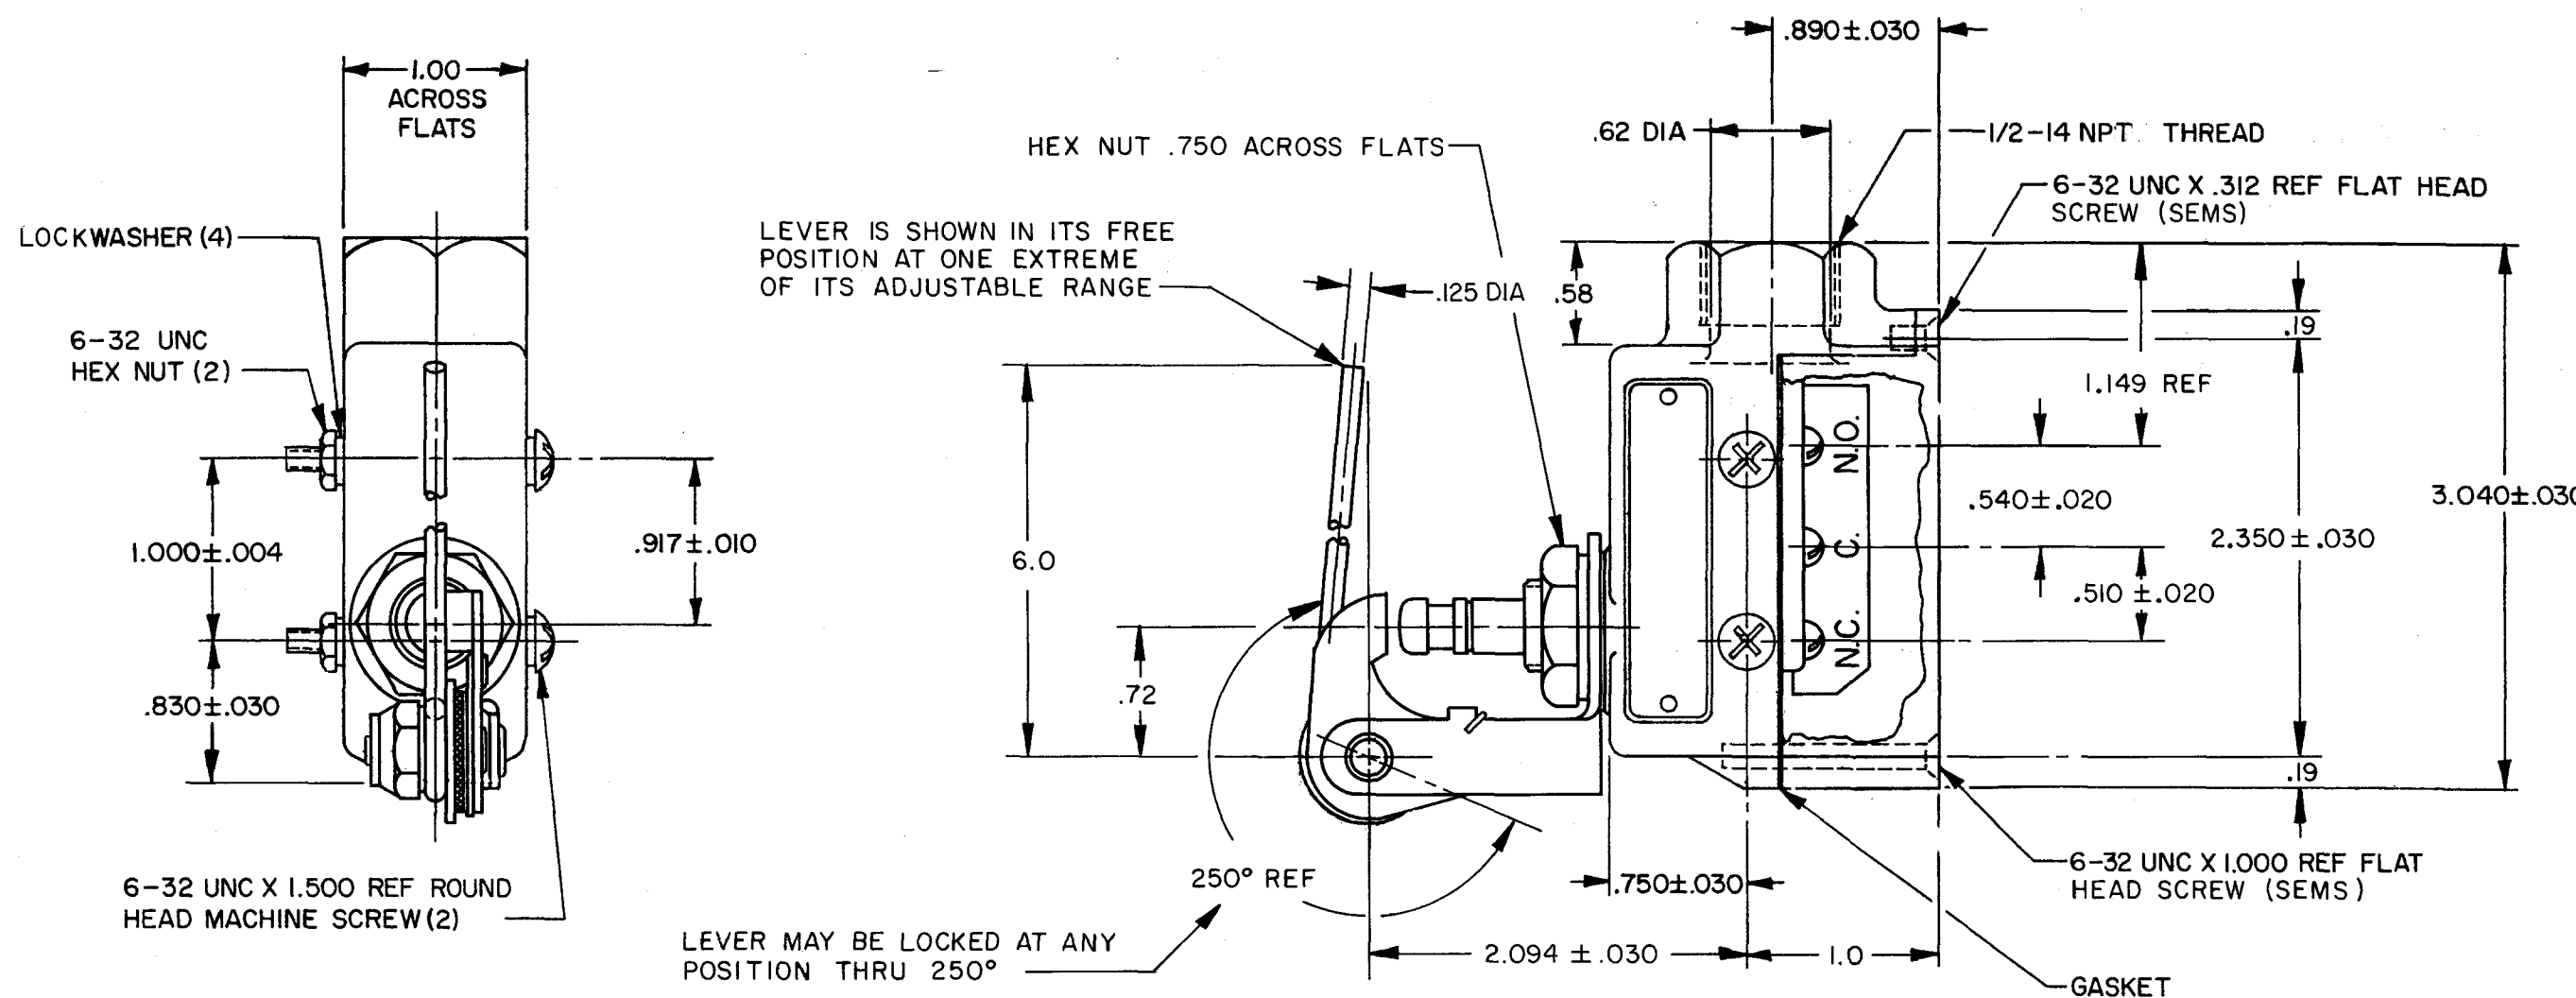

NOTES

- 1 - 4-40 UNC X .125 REF TERMINAL SCREW AND LOCKWASHER (6)
- 2 - LEVER BRACKET ASSEMBLY MAY BE SET AT ANY POSITION AROUND AXIS OF PLUNGER
- 3 - SEAL RATING: NEMA 1 IP40